

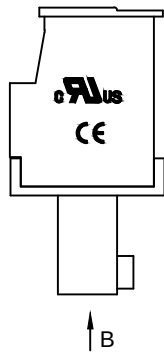




B向



B

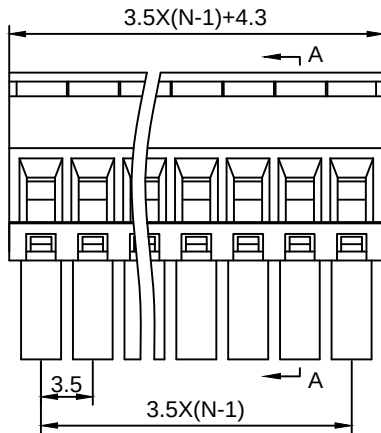

A-A

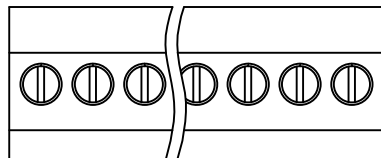

Material :

- ① Housing : PA66(UL94V-0)
- ② Screws : Steel , Cr³⁺Zn Plated
- ③ Cage : Brass , Ni Plated
- ④ Contact : Phosphor Bronze
- ⑤ Cover : PA66(UL94V-0)

Electrical :

- 1.Rated Voltage : 300V
- 2.Rated Current : 8A
- 3.Torque Value : M2 , 1.77Lb.in
- 4.Wire Range: 28-16AWG
- 5.Stripping Length : 6-7mm
- 6.Withstanding Voltage : AC1600V/1Min.
- 7.Operating Temperature : -40 °C~+105 °C
- 8.RoHS Compliance
- 9.Safety Approval :
- 10.Undimensioned Tolerances:

Pitch Range In mm			Nominal Dimension Range In mm							
≤6	6 ~ 10	10 ~ 24	≤30	30 ~ 60	60 ~ 100	100 ~ 150	>150	0.05/10		
±0.10	±0.15	±0.25	±0.20	±0.30	±0.50	±0.70	±1.00	±0.1°		

15EGTKB - 3.5 - XXP - X X - 00 AH

① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② Pitch
- ③ Poles
- ④ 1 Single Pitch
2 Double Pitch
- ⑤ Color: 1 Grey
2 Blue
3 Black
4 Green(Standard For AH)
5 Orange
6 Red
7 Transparent
8 Yellow
9 White
- ⑥ Customer Request : 00--Standard
- ⑦ AH--Standard(PA66)

DETACHED LISTS	Golten® NINGBO GOLTEN ELECTRONICS CO., LTD.		宁波冠泰电子有限公司	
	APPD: MA_10/13/16 '		PART NO. 15EGTKB-3.5-XXP-XX-00AH	
	CHKD: Yu_10/12/16 '			
	DRFT: Chen_10/11/16 '		DRAWING NO.	
	THIRD ANGLE PROJECTION		REV 1	
			SHEET 1/1	
		MM (INCH)	DO NOT SCALE DRAWING	SCALE 1/1