REV	CONTENT	CHK	DATE
V0.0	CONTENT	CXL	21.05.21

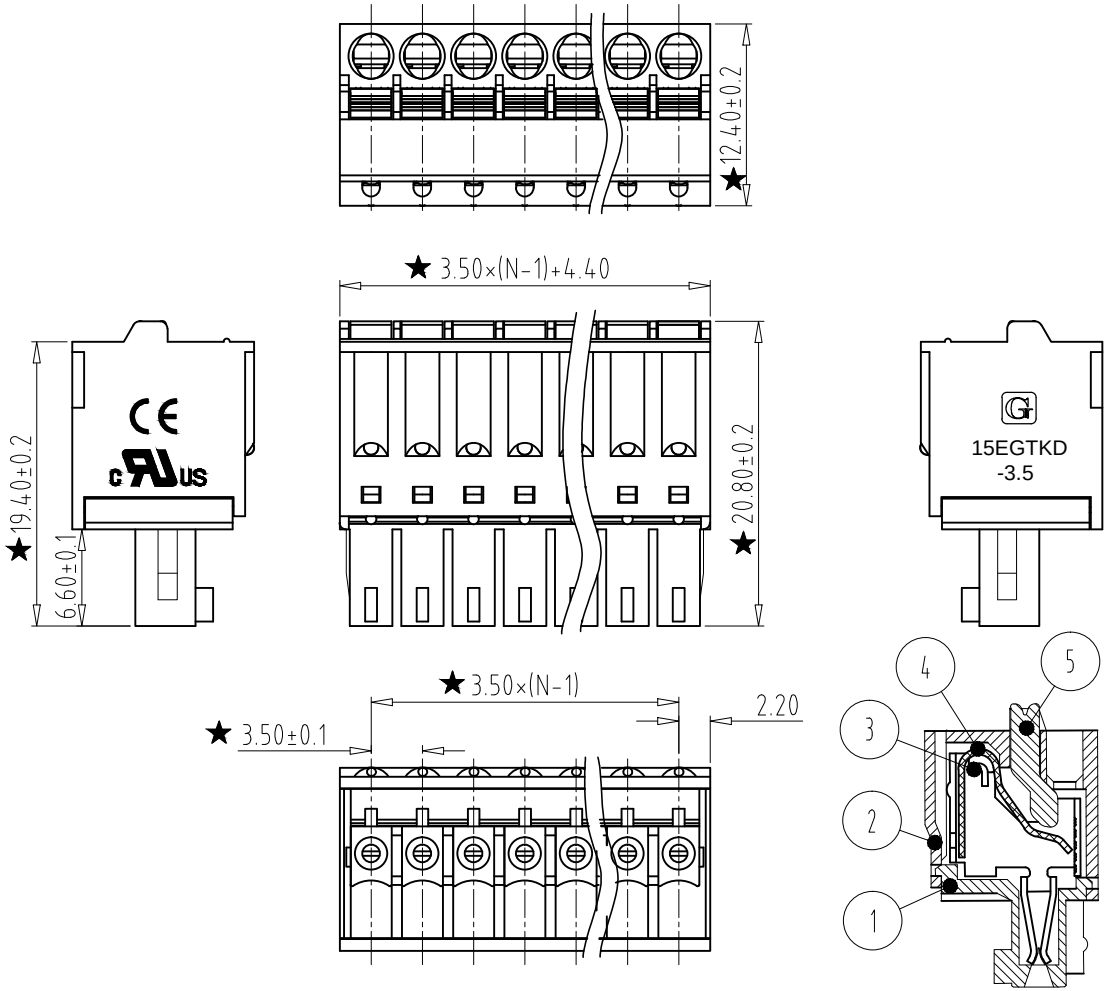

Electrical :

	UL	IEC
1.Rated Voltage :	300V	250V
2.Rated Current :	8A	12A
3.Wire Range:	28-16AWG	0.2-1.5mm^2

4.Stripping Length : 8-9mm
5.Withstanding Voltage : AC1600V/1Min.
6.Operating Temperature : -40°C~+105°C
7.RoHS Compliance
8.Safty Approval : cULus CE
9."★" is the key quality control point

15EGTKD - 3. 5 -XXP - X X - 00
① ② ③ ④ ⑤ ⑥

① Sereies NO.

② Pitch

③ Poles
02 02Contacts
03 03Contacts
...
24 24Contacts

④ 1 Single Pitch
2 Double Pitch

⑤ Color: 1 Grey
2 Blue
3 Black
4 Green
5 Orange
6 Red
7 Transparent
8 Yellow
9 White

⑥ Customer Request: 00-- Standard

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
5	Button	XXXXXX	P	POM	UL94HB
4	Spring	XXXXXX	P	Srainless steel	
3	Clamp	XXXXXX	P	Phosphor bronze	Tin Plated
2	Housing	XXXXXX	1	PA66	UL94V-0
1	Cover	XXXXXX	1	PA66	UL94V-0

DWG.	MYZ	DATE	21.05.21	SIZE	A4	UNITS	mm
CHK.		DATE		SCALE	1:1	SHEET/OF	1 / 1
APP.		DATE		NAME	15EGTKD-3.5-XXP-XX-00		
				DWGNO.	XXXX		

Golten 宁波冠泰电子有限公司
NINGBO GOLTEN ELECTRONICS CO., LTD.

Total Pitch Tolerances in mm									Nominal dimension range in mm									⊥		≒	—		//
over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 250	over 250 to 350	over 350 to 500	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320	over 0 to 10	over 10	all	over 0 to 100	over 100 to 150	over 150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5