

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

UL Standard

1.Rated voltage/current : 150V / 4A

2.Withstanding voltage : AC1300V/1Min.

IEC Standard

1.

Pollution degree	2
Overvoltage category	II
Rate impulse voltage(KV)	2.5KV
Rate voltage(V)	250V
Rate current(A)	5A

NOTES2:

1.Dimension shall be interpreted per ASME Y14.5-2009






2.Pitch : 2.5mm, Poles : N=02~12P

3.Operating temperature: -40°C~+130°C


4.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm							0.1/10
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150		0.1/10
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°	0.1/10

5.RoHS Compliance

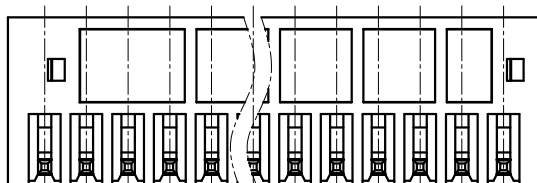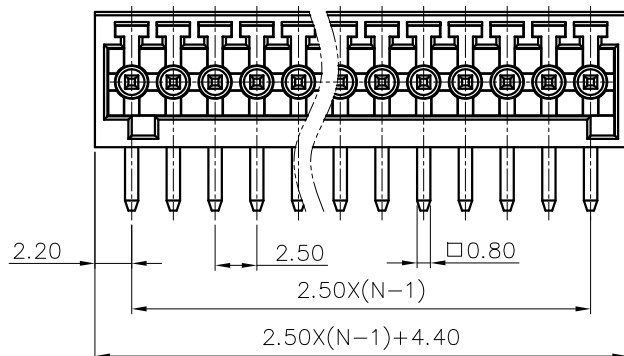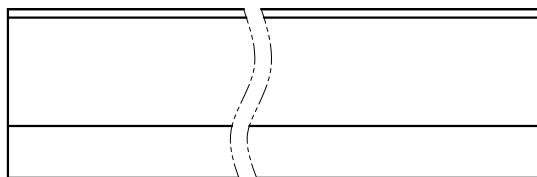

15EDGRC-THR - 2.5 - XXP - 1Y - 00A (H)
(Series No.) (Pitch) (Poles) (Single Pitch) (Color):1.(Grey)
3.(Black)
5.(Orange)

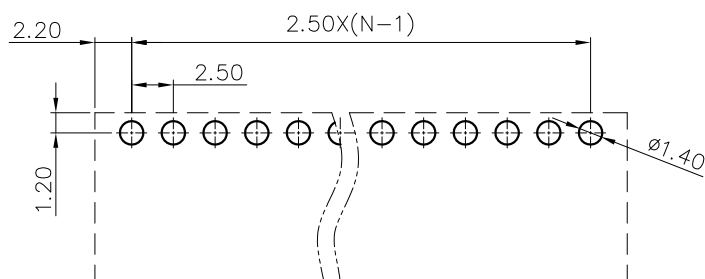

PCB LAYOUT

DETACHED LISTS	PART NO.:	/				宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	/				NAME:			
	CHKD:	/				15EDGRC-THR-2.5-XXP-1Y-00A(H)			
	DRFT:	/				TITLE: CUSTOMER DRAWING		REV	DO
THIRD ANGLE PROJECTION		DRAWING NO.:		/		SHEET		1/1	
		MM (INCH)		DO NOT SCALE DRAWING		SCALE		1:1	