

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

UL Standard

1.Rated voltage/current : 300V / 8A

2.Withstanding voltage : AC1600V/1Min.

IEC Standard

1.

Pollution degree	2
Overvoltage category	II
Rate impulse voltage(KV)	2.5KV
Rate voltage(V)	250V
Rate current(A)	8A

NOTES2:

1.Dimension shall be interpreted per ASME Y14.5-2009






2.Pitch : 3.5/3.81mm, Poles : N=02~12P/02~15P

3.Operating temperature: -40°C~+130°C

4.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm						
TO	Over	TO	Over	TO	Over	TO	Over	
6	10	10	24	30	60	100	150	0.1/10
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

5.RoHS Compliance

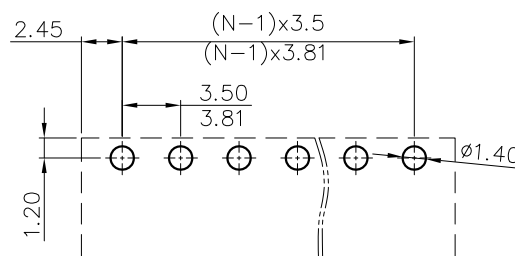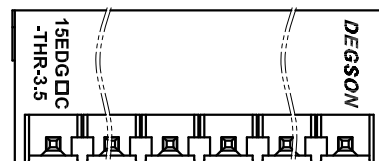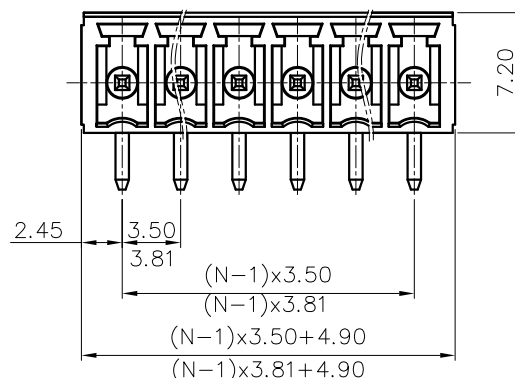

PCB LAYOUT

15EDGRC-THR - 3.5/3.81 - XXP - 1Y - 00A (H)
(Series No.) (Pitch) (Poles) (Single Pitch) (Color): 1.(Grey)
3.(Black)
5.(Orange)

DETACHED LISTS	PART NO.:	/				NINGBO DEGSON ELECTRICAL CO., LTD	
	APPD:	/		NAME:		15EDGRC-THR-3.5/3.81-XXP-1Y-00A(H)	
	CHKD:	/		TITLE:		CUSTOMER DRAWING	REV
	DRFT:	/		DRAWING NO.:		/	SHEET
	THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING		SCALE		1:1