

REV	2	1	
	CONTENT	CHK	DATE
V0.0	CONTENT	MYZ	21.06.05

Electrical :

- 1.Rated Voltage : 300V UL 400V IEC
 2.Rated Current : 15A 20A
 3.Withstanding Voltage : AC1600V/1Min.
 4.Operating Temperature : -40°C~+105°C
 5.RoHS Compliance
 6.Safety Approval : 
 7."★" is the key quality control point

2EGTVM - 7.62 -XXP - X X - 100
 ① ② ③ ④ ⑤ ⑥



① Series NO. ④ 1 Single Pitch
 2 Double Pitch

② Pitch ⑤ Color: 1 Grey
 2 Blue
 3 Black
 4 Green
 5 Orange
 6 Red
 7 Transparent
 8 Yellow
 9 White

⑥ Customer Request: 100—Standard

3	NUT	XX	2	BRASS	/
2	PIN HEADER	XX	P	BRASS	Tin Plated
1	HOUSING	XX	1	PA66 UL94V-0	SEE NOTE
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	MYZ	DATE	21.06.05	SIZE	A4 UNITS mm SHEET/OF 1/1
CHK.	DATE			SCALE	1:1
APP.	DATE				
			NAME	2EGTVM-7.62-XXP-XX-100	
			DWGNO.	XXXX	

 宁波冠泰电子有限公司
 NINGBO GOLTEN ELECTRONICS CO., LTD.

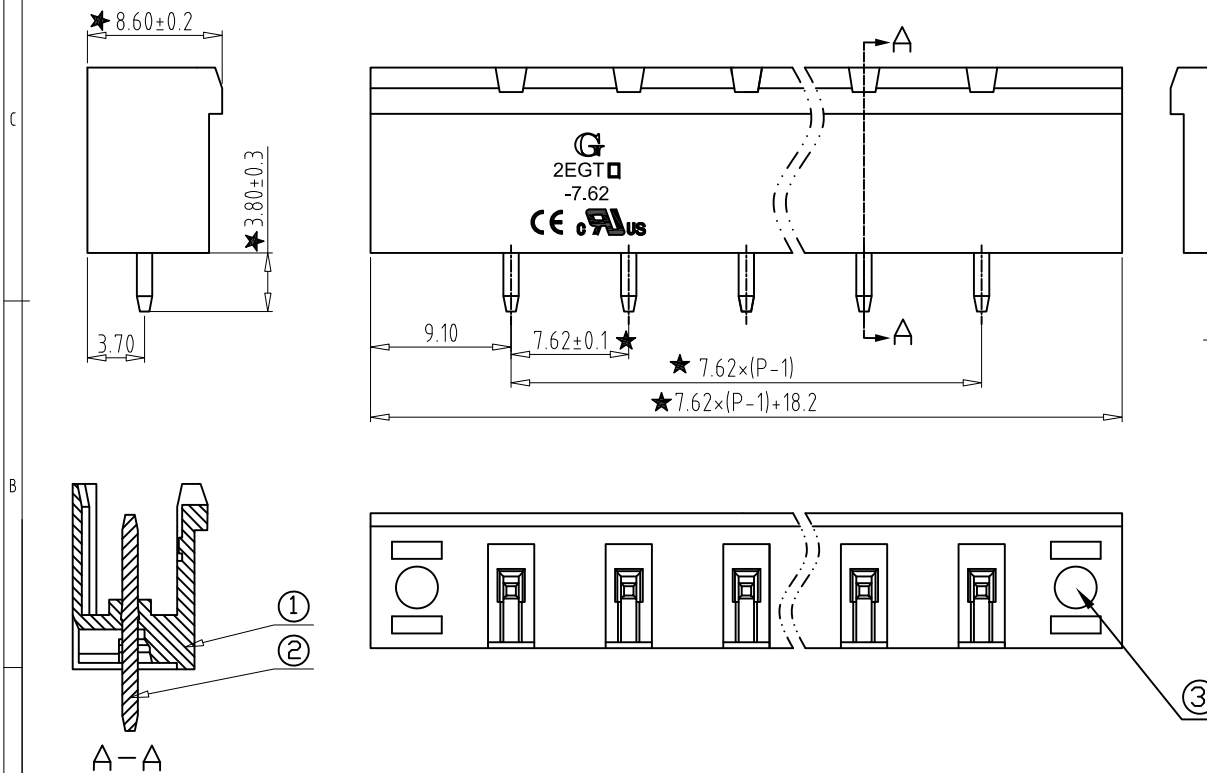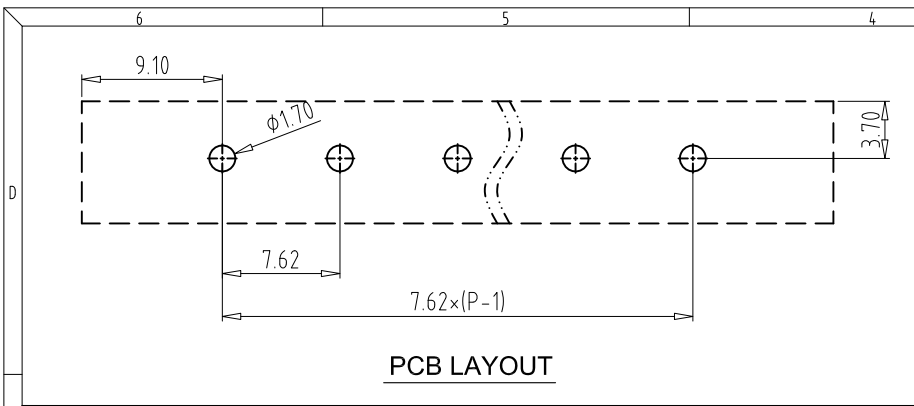

Total Pitch Tolerances in mm										Nominal dimension range in mm										$\perp$		$\equiv$		$—$		$//$	
over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 250	over 350	over 500	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	over 0	over 10	all		over 0	over 100	over 150	
to 30	to 53	to 70	to 90	to 115	to 150	to 250	to 350	to 500	to 500	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 10	to 10			to 0	to 100	to 150		
± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.60	± 0.70	± 0.85	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90			0.2	0.3	0.3	0.2	0.3	0.5		