
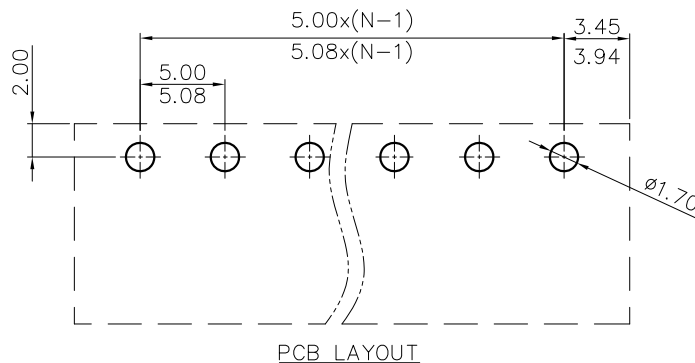
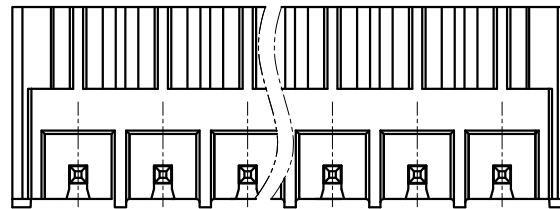
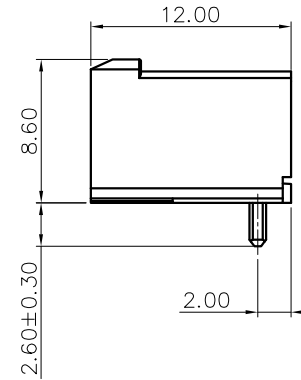
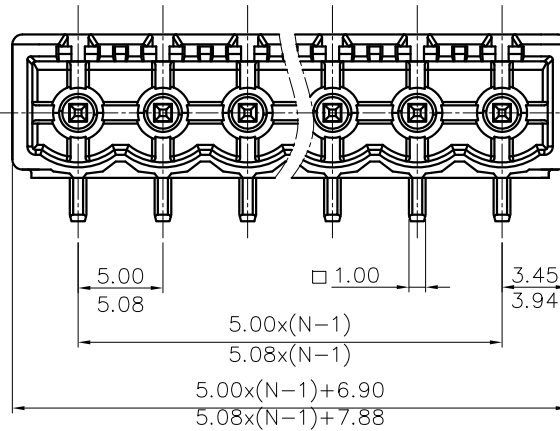



REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

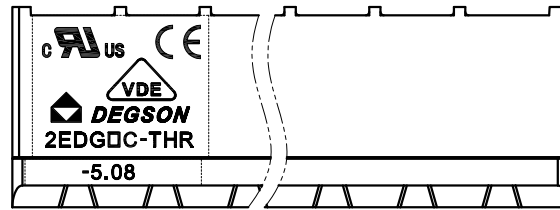

PCB LAYOUT

NOTES1:

UL Standard

- 1.Rated voltage/current : 300V / 15A
- 2.Withstanding voltage : AC1600V/1Min.

IEC Standard

1.

Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	4.0KV
Rate voltage(V)	320V
Rate current(A)	20A

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 5.00/5.08mm, Poles : N=02~12P
- 3.Operating temperature: -40°C~+130°C
- 4.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm				
TO	Over	TO	Over	TO	Over	
6	10	10	24	30	60	100
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00
						±1.30
						±2'

5.RoHS Compliance

2EDGRC-THR - 5.00/5.08 - XXP - 1Y - 00A (H)
 (Series No.) (Pitch) (Poles) (Single Pitch) (Color):1.(Grey)
 3.(Black)
 5.(Orange)

DETACHED LISTS	PART NO.:	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	NAME:			
	CHKD:	2EDGRC-THR-5.00/5.08-XXP-1Y-00A(H)			
	DRFT:	TITLE: CUSTOMER DRAWING		REV	DO
THIRD ANGLE PROJECTION		DRAWING NO.:		SHEET	1/1
MM (INCH)		DO NOT SCALE DRAWING		SCALE	1:1