

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

UL Standard

1.Rated voltage/current : 300V / 15A

2.Withstanding voltage : AC1600V/1Min.

3.Wire range : 22~14AWG

IEC Standard

1. Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	400V
Rate Current(A)	20A

2.Wire range : 0.2~2.5mm²

NOTES2:

1.Dimension shall be interpreted per ASME Y14.5-2009

2.Pitch : 7.5/7.62mm, Poles : N=02~12P

3.Stripping length : 8~9mm







4.Operating temperature: -40°C~+105°C

5.Undimensioned tolerances:


Pitch range in mm			Nominal dimension range in mm						
TO	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°	0.1/10

6.RoHS Compliance

8EDGKG - 7.5/7.62 - XXP - 1Y - 00A (H)
 (Series No.) (Pitch) (Poles) (Single Pitch) (Color) : 1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)

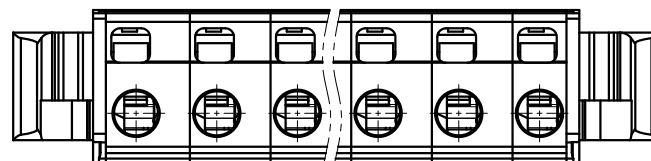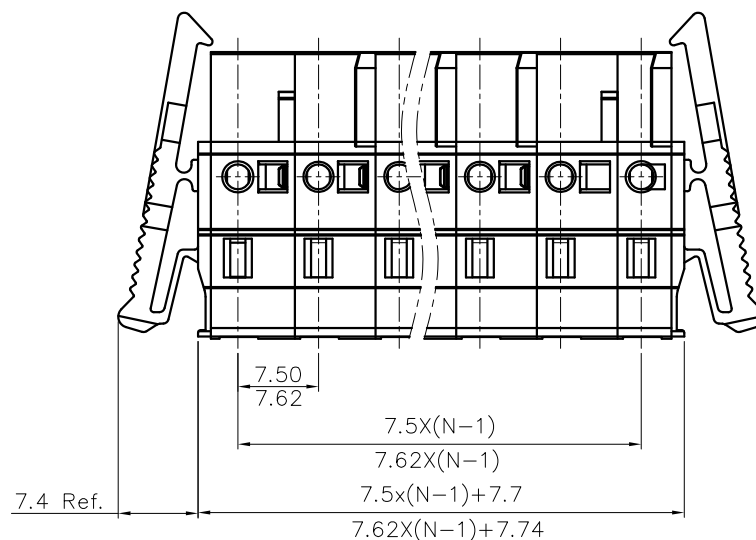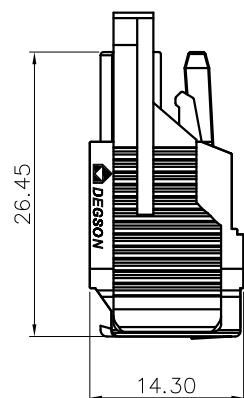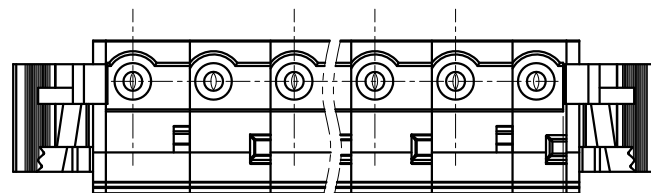

02P



03P

DETACHED LISTS	PART NO.:	/			宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	/			NAME:		
	CHKD:	/			8EDGKG-7.5/7.62-XXP-1Y-00A(H)		
	DRFT:	/			TITLE: CUSTOMER DRAWING	REV	DO
		DRAWING NO.:			SHEET 1/1		
THIRD ANGLE PROJECTION					DO NOT SCALE DRAWING	SCALE	1:1