


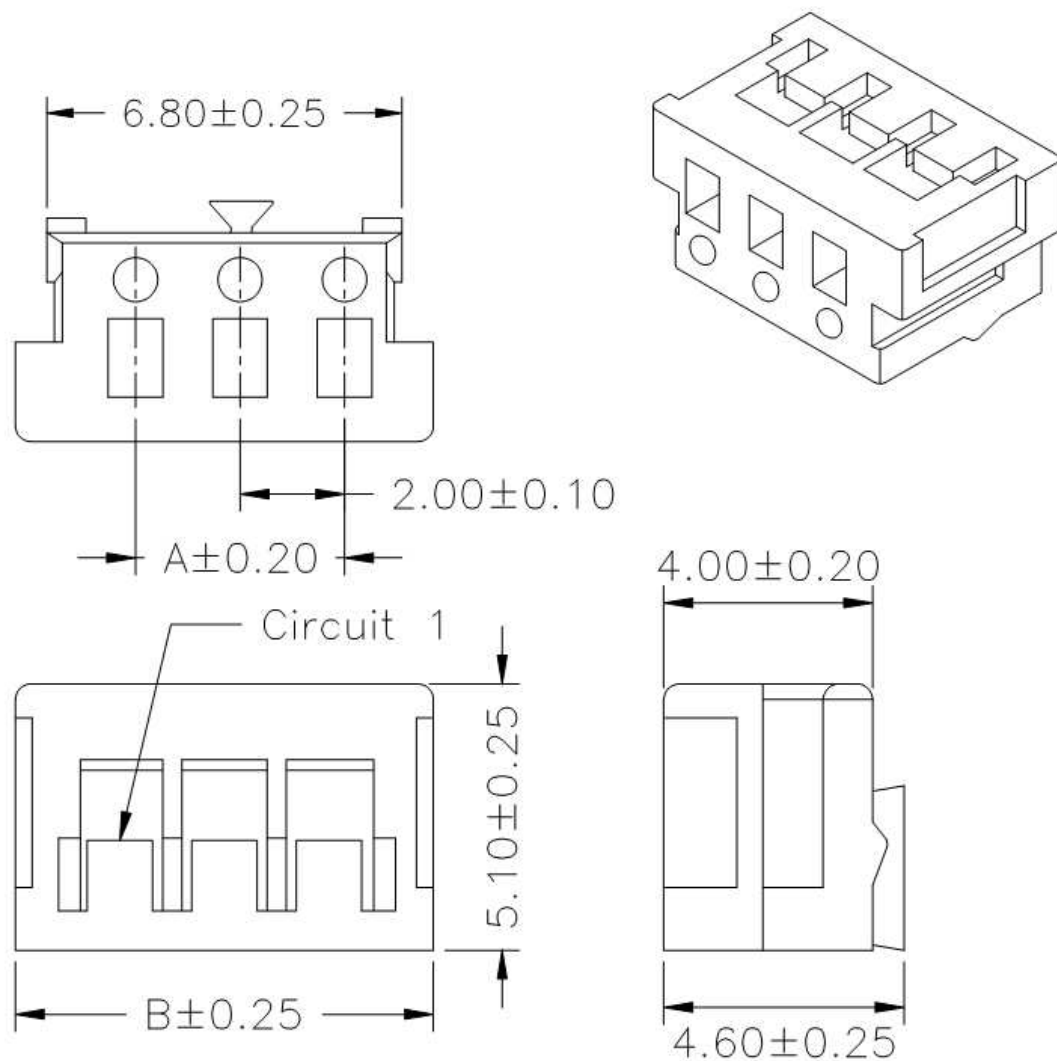

SPECIFICATIONS

Current Rating: 1A AC,DC

Voltage Rating: 100V AC,DC

Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Contact Resistance: $20\text{m}\Omega$ Max.

Insulation Resistance: $1000\text{M}\Omega$ Min.

Withstanding Voltage: 800V AC/minute

Material: Nylon 66,UL94V-0

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
CT-02F	2.00	6.00
CT-03F	4.00	8.00
CT-04F	6.00	10.00
CT-05F	8.00	12.00
CT-06F	10.00	14.00
CT-07F	12.00	16.00
CT-08F	14.00	18.00
CT-09F	16.00	20.00
CT-10F	18.00	22.00
CT-11F	20.00	24.00
CT-12F	22.00	26.00
CT-13F	24.00	28.00
CT-14F	26.00	30.00
CT-15F	28.00	32.00