
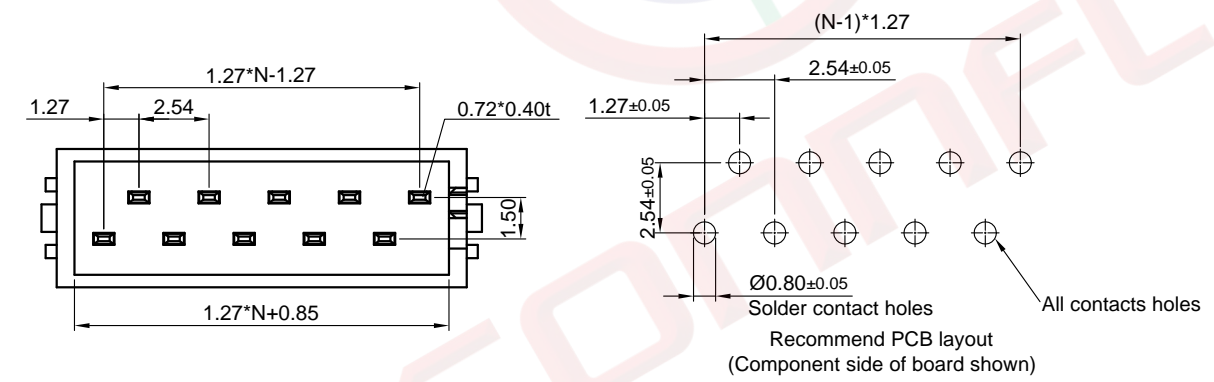


Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

The information provided herein is from CONNPLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNPLY or its affiliates. Unauthorized use or reproduction of any part of this drawing without the prior written consent of CONNPLY may constitute a violation of such rights. CONNPLY may enforce its intellectual property rights at its own discretion, failures or delays in exercising such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 03/11/11'		LJC 03/11/11'
B	DRAWING UPDATE	JLZ 08/28/18'		

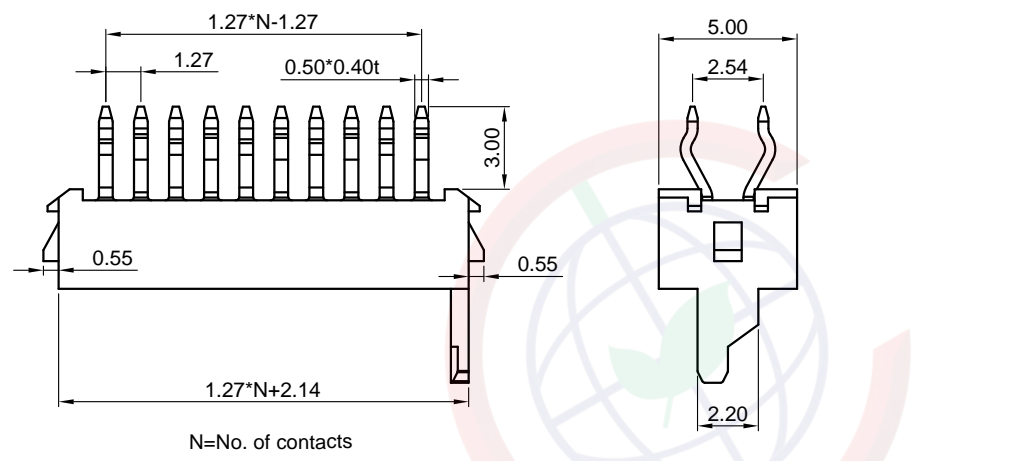

(Series Image-Reference Only)

NOTES:

- Materials
 - 1.1 Insulator: Thermoplastic (UL 94V-0).
 - 1.2 Contact: Copper alloy.
- Specification
 - 2.1 Temperature range: -40°C ~ +105°C.
 - 2.2 Contact resistance: 30mΩ max.
 - 2.3 Insulation resistance: 1000MΩ min.
 - 2.4 Dielectric withstanding voltage: AC 500V per minute.

3. Product number code:

DS1015-07- X X X

- Contact plating
 - 2: Nickel + Gold flash
 - 6: Full tin
 - 8: Full gold flash
- Housing color
 - R: Red
- No. of contacts
 - 04 06 08 10 12
 - 14 16 18 20 24

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1015-07-XXXX-B		

PROJECTION	TITLE
	RED DIP SERIES
UNITS	(MICRO MATCH CONNECTOR)
mm	
SHEET SIZE	A4
SERIES	DS1015-07 SERIES



晨翔电子有限公司

CONNPLY ELECTRONIC CO. LTD