

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 10/21/08'	~	

NOTES:





1. SPECIFICATIONS

- 1.1 CONTACT RESISTANCE:50mΩ Max.
- 1.2 INSULATOR RESISTANCE:100MΩ Min.
- 1.3 DIELECTRIC STRENGTH:100VAC FOR 1 Minute.
- 1.4 DURABILITY: 5000 CYCLES.

2. PRODUCT NUMBER CODE:

DS1104 - X X X X X X

- POST SUPPORT
S:W/ POST
X:W/O POST
- PACKING TYPE
R:TAPE ON REEL
B:TUBE
- MYLAR SUPPORT
S:W/ MYLAR
X:W/O MYLAR
- CONTACT PLATING
0: SELECTIVE GOLD FLASH
C: SELECTIVE 3u" GOLD
- SHELL PLATING
6: FULL MATT TIN(RECOMMENDED)
8: FULL GOLD
- COLOR OF HOUSING
B: BLACK

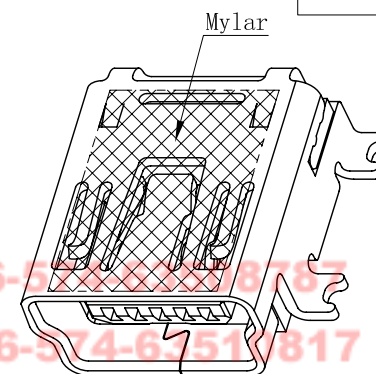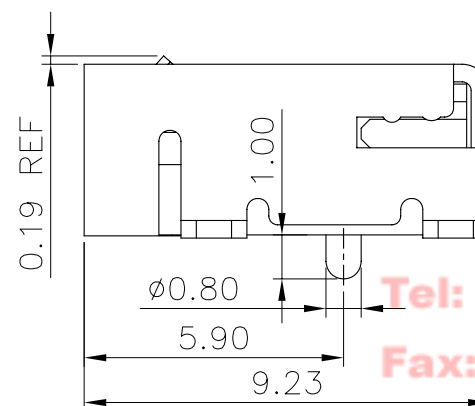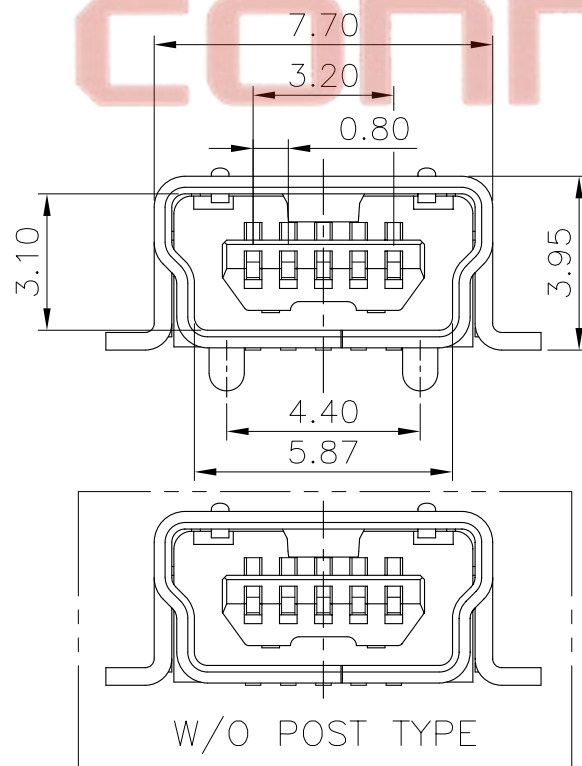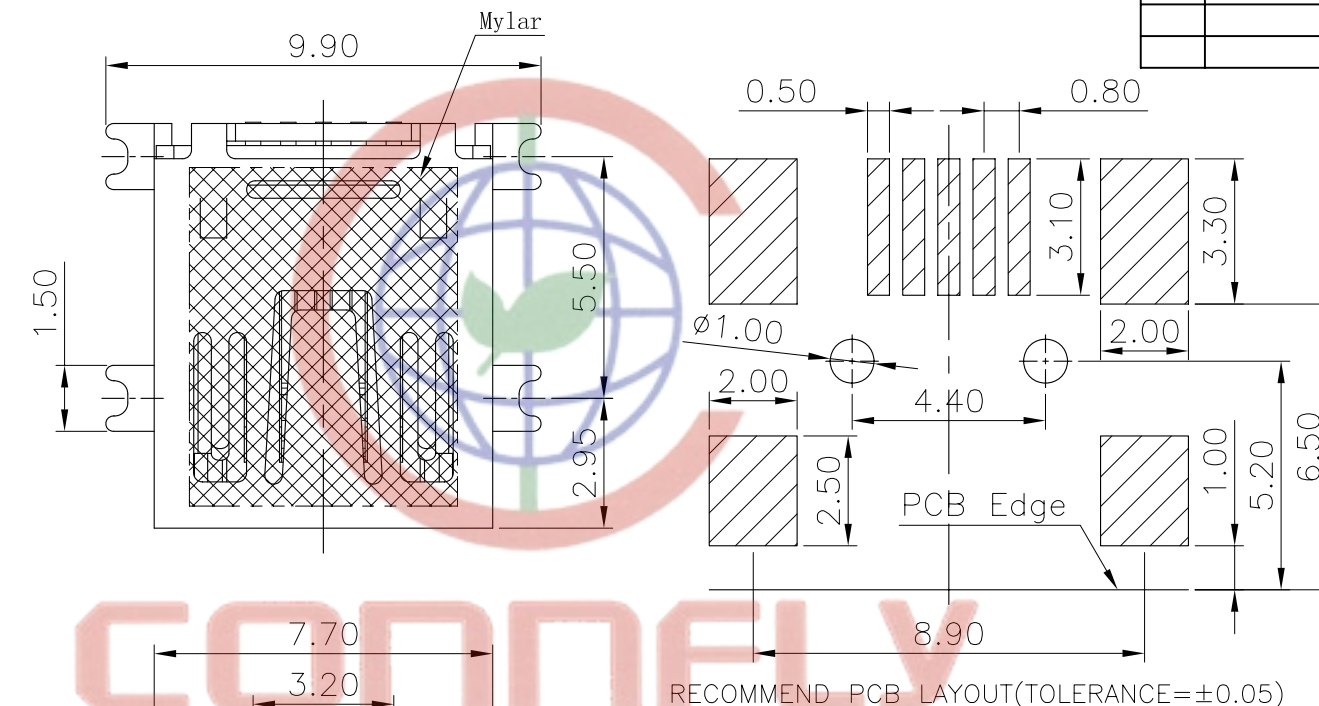

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	MINI USB B TYPE 5 pos. RECEPTACLE SMT TYPE	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1104 SERIES
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER					
SCALE		1:1	SHEET	1 OF 1			
DRAWING NO.		C-DS1104-XXXXXX					



晨翔电子有限公司

CONNPLY CONNPLY ELECTRONIC CO. LTD