

PRODUCT SPECIFICATION

Model No.: FYL-5016SURC1C-B

Descriptions:
■ Dice material: AlGaInP.
■ Emitting Color: Super bright Red.
■ Device Outline: $\Phi 5\text{mm}$ round blinking flash type.
■ Lens Type: Water clear.



CUSTOMER APPROVED SIGNATURES	APPROVED BY	CHECKED BY	PREPARED BY

NINGBO FORYARD OPTOELECTRONICS CO.,LTD.

Add: NO.115 Qixin Road Ningbo Zhejiang China

Zip: 315051

Tel: 0086-574-87933652 87927870 87922206

Fax: 0086-574-87927917


E-mail: Sales@foryard.com (General)

[Http://www.foryard.com](http://www.foryard.com)

■ Features

1. Low power consumption.
2. High efficiency.
3. General purpose leads.
4. RoHs compliant.
5. Flashing light.

■ Package configuration

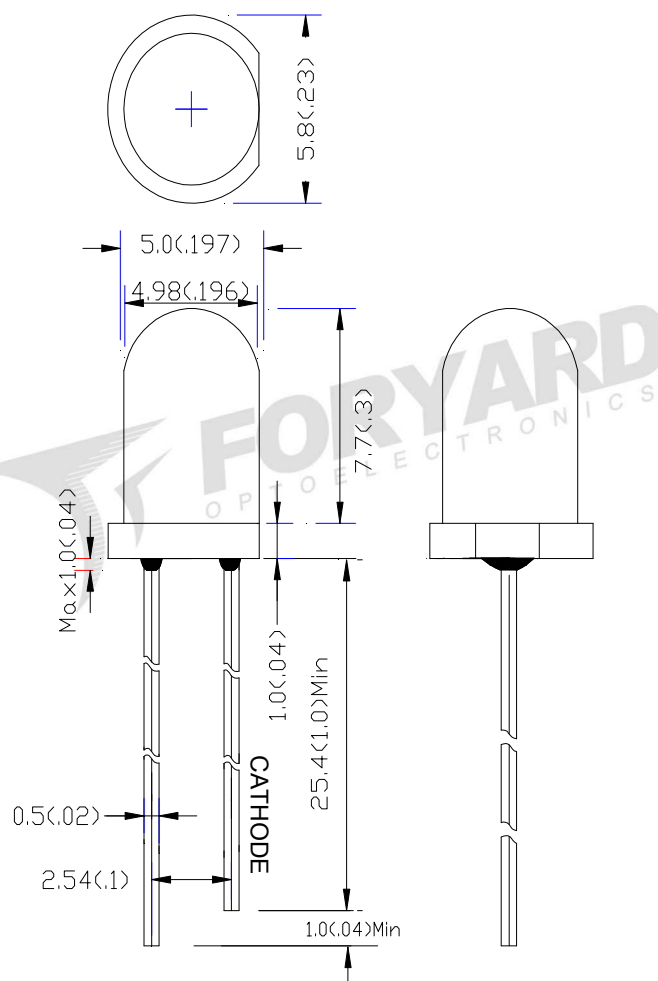

Notes:

1. All dimensions are millimeters (inches)
2. Tolerance is $\pm 0.25\text{mm} (.010")$ unless otherwise noted.
3. The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.

■ Absolute maximum ratings($T_a=25\text{ }^{\circ}\text{C}$)


Parameter	MAX.	Unit
Power Dissipation	75	mW
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	100	mA
Continuous Forward Current	30	mA
Derating Linear From $50\text{ }^{\circ}\text{C}$	0.4	mA/ $^{\circ}\text{C}$
Reverse Voltage	5	V
Operating Temperature Range	$-40\text{ }^{\circ}\text{C}$ to $+85\text{ }^{\circ}\text{C}$	
Storage Temperature Range	$-40\text{ }^{\circ}\text{C}$ to $+100\text{ }^{\circ}\text{C}$	
Lead Soldering Temperature[4mm(.157") From Body]	$260\text{ }^{\circ}\text{C}$ for 5 Seconds	

■ Electrical and optical characteristics($T_a=25\text{ }^{\circ}\text{C}$)


Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	I_v	—	2000	—	mcd	$I_F=20\text{mA}$
Viewing Angle	$2\theta_{1/2}$	—	15	—	Deg	
Peak Emission Wavelength	λ_p	—	630	—	nm	
Dominant Wavelength	λ_d	618	625	630	nm	
Spectral Line Half-Width	$\Delta\lambda$	—	30	—	nm	
Forward Voltage	V_F	5.0	7.0	—	V	
Blinking Frequency	F_{blk}	2.0	2.4	2.8	Hz	VDD=5V
Reverse Current	I_R			10	μA	$V_R=5\text{V}$

■ Typical Electrical Characteristics Curves


(25 °c Ambient Temperature Unless Otherwise Noted)

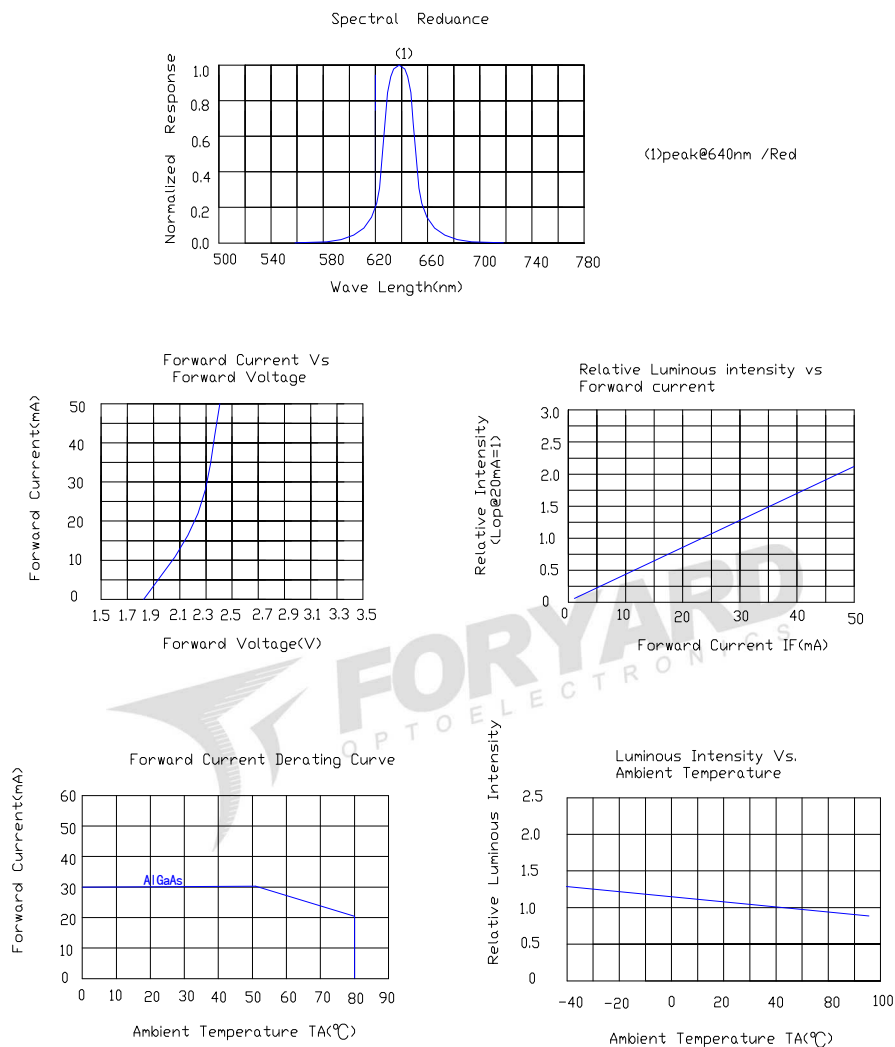



Radiation pattern.

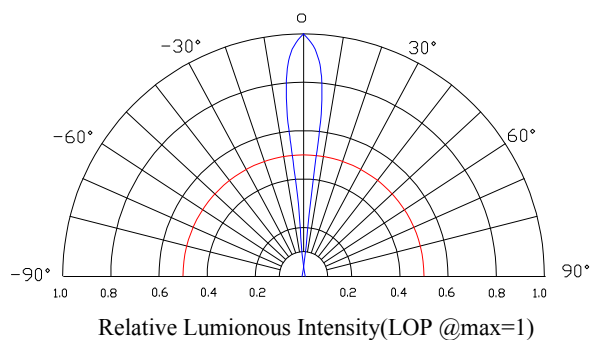


■ LAMP PACKING.



5mm 1000PCS/Polybag

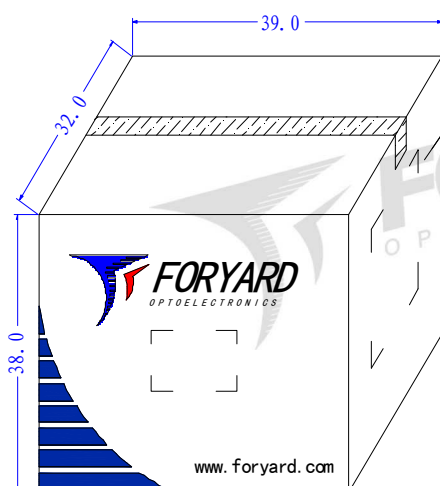

OUTSIDE LABEL

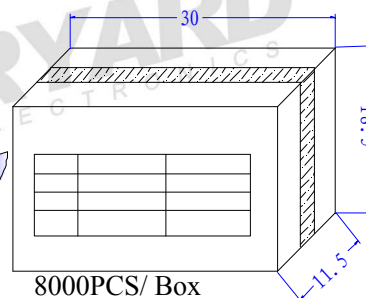

48000PCS/ Carton



OUTSIDE LABEL