


Order Method:



|              |                      |                            |      |
|--------------|----------------------|----------------------------|------|
| Product      | Electrical           |                            |      |
| Description: | Standard             | UL                         | IEC  |
|              | Rated voltage        | 300V                       | 320V |
|              | Rated current        | 16A                        | 20A  |
|              | Withstanding voltage | AC2500V/1Min               |      |
|              |                      |                            |      |
|              | Mechanical           |                            |      |
|              | Ambient temperature  | -40°C~+105°C               |      |
|              |                      |                            |      |
|              | Dimensions           |                            |      |
|              | Pitch                | 5.0mm(.197"),5.08mm(.200") |      |
|              | Poles                | 2P-24P                     |      |
|              |                      |                            |      |
|              | Material             |                            |      |
|              | Housing              | PA66,UL94V-0               |      |
| Pin header   | Brass,Tin plated     |                            |      |

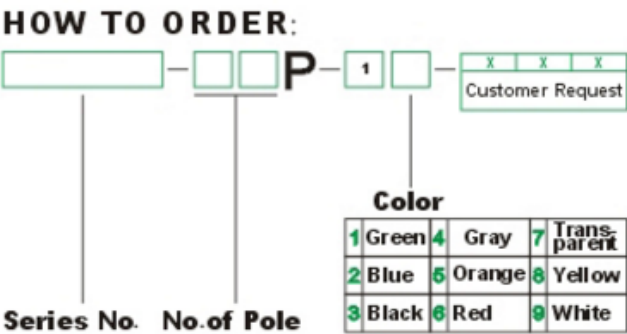