

1
RoHS Compliance

2

3

4

5

6

7

8

A

A

B

B

C

C

D

D

E

E

F



F

G



G

H

H

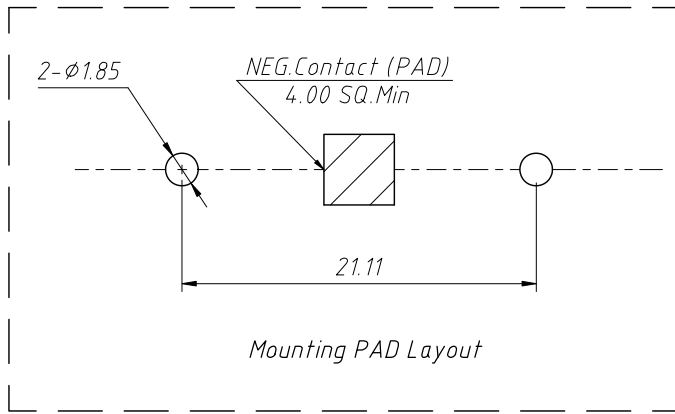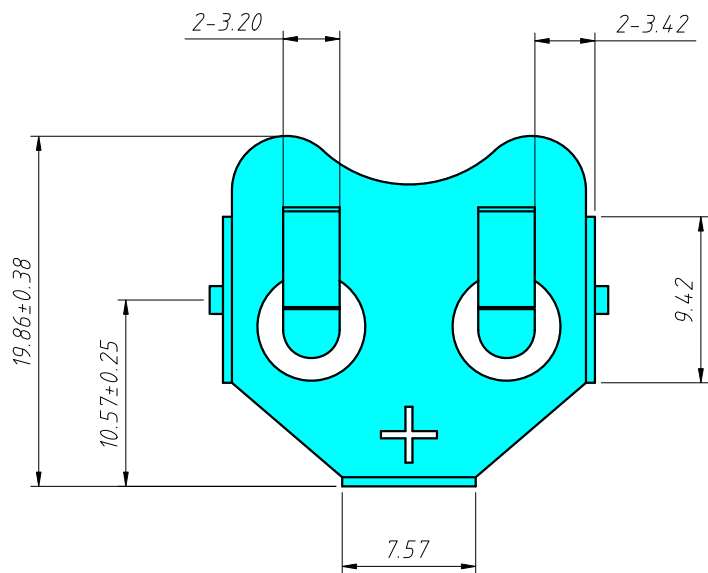


Order Information:
L-KLS5-CR2032-09B
L: RoHS
CR2032 Coin
Battery Holder
Part Number
Packing:B-PVC blister

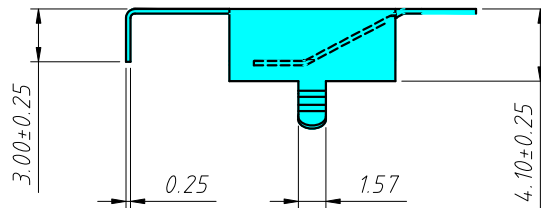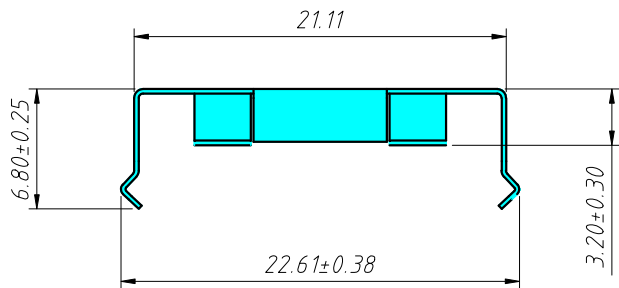

Electrical Characteristics:
Contact Resistance:30mΩ Max
Insulator Resistance:1000MΩ Min
Dielectric Voltage:500V AC One Sec Level
Operating Temperature:-25℃~+85℃

Notes:
1.RoHS Compliant

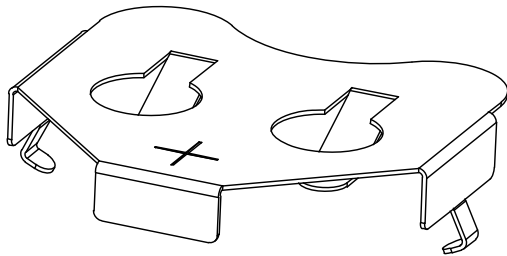

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				CR2032 COIN CELL RETAINERS	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS5-CR2032-09B
x.x	±0.30	SHEET SIZE	A4		
x.xx	±0.20	Draw:	Daniel	2022-03-01	NingBo KLS ELECTRONIC CO.,LTD.
x.xxx	±0.10	Check:	Daniel	2022-03-01	