

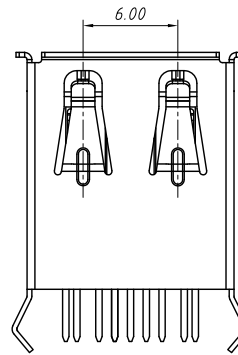

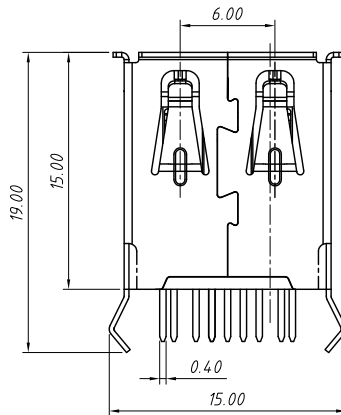


REFERENCE PCB LAYOUT

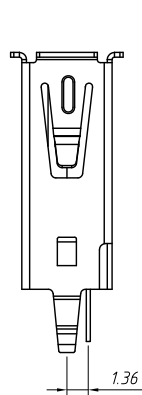

Material

Housing: PBT+30%GF,UL 94 V-0

Shell :Brass C2680 T=0.30mm ,Plated Nickel

Terminal :Phosphor Bronze C5191 T=0.25mm
,Plated Gold/Tin

Electrical

Voltage Current Rating:2AMP,30V AC

Insulator Resistance: 100MΩ Min

Contact Resistance: 50mΩ Max

Withstanding Voltage: 300V AC

Mechanical

Operating Temperature:-55°C TO +85°C.

Mating Force: 35N MAX

Unmating Force: 10N MIN.

Order Information

L-KLS1- 3006 - L
Color: L:Blue
USB AF 3.0 180 DIP Type
RoHS

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:
X. ±0.60		X. ±5°		UNITS	mm	USB 3.0 type A Female CONN,Straight
.X ±0.38		.X ±3°		SHEET SIZE	A4	
.XX ±0.25		.XX ±2°			KLS P/N:	
Draw by: Date		2018-03-01		 NingBo KLS ELECTRONIC CO.,L TD.		
Check by:: Date		2018-03-01				
SCALE		SHEET				