


TOTAL NO. OF PINS	DIMENSIONS (UNIT : mm/Inch)			TOTAL NO. OF PINS	DIMENSIONS (UNIT : mm/Inch)		
	A±0.30/.012	B	C±0.30/.012		A±0.30/.012	B	C±0.30/.012
10	32.00/1.260	10.16/.400	17.40/.685	30	57.40/2.260	35.56/1.400	42.80/1.685
14	37.08/1.460	15.24/.600	22.48/.885	34	62.48/2.460	40.64/1.600	47.88/1.885
16	39.62/1.560	17.78/.700	25.02/.985	40	70.10/2.760	48.26/1.900	55.50/2.185
20	44.70/1.760	22.86/.900	30.10/1.185	50	82.80/3.260	60.96/2.400	68.20/2.685
24	49.78/1.960	27.94/1.100	35.18/1.385	60	95.50/3.760	73.66/2.900	80.90/3.185
26	52.32/2.060	30.48/1.200	37.72/1.485	64	100.58/3.960	78.74/3.100	85.98/3.385

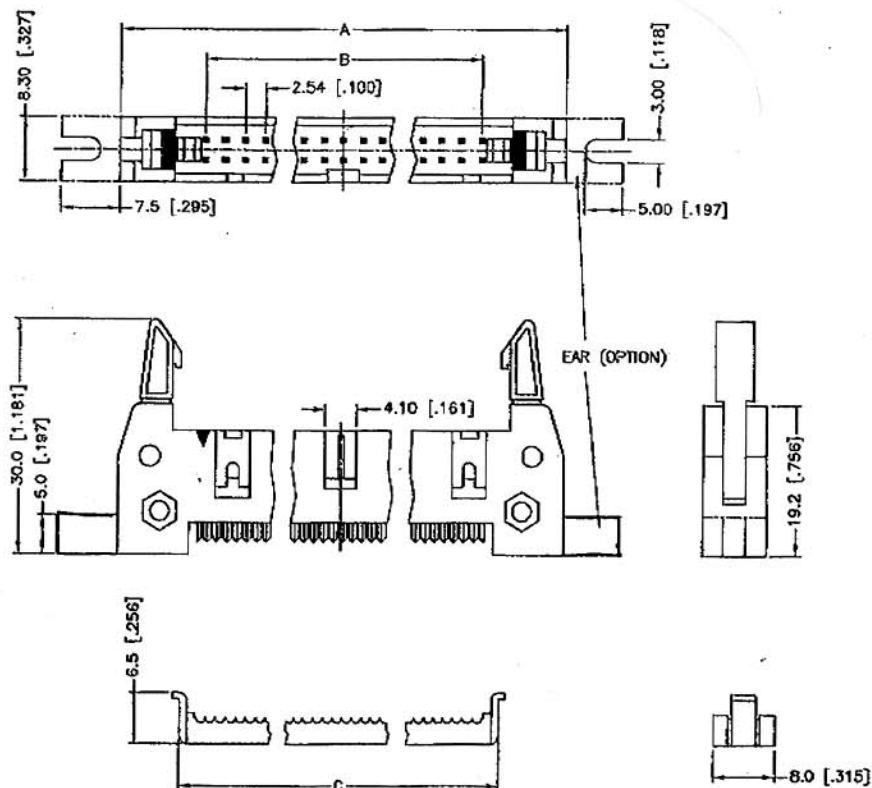

MATERIALS

1. HOUSING : P.B.T. (UL 94V-0), GRAY.
2. TERMINAL : COPPER ALLOY.

SPECIFICATION

1. CURRENT RATING : 3 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 5000M OHMS MIN. AT 1000V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -55°C TO +105°C.

玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

制表日 : 2005/01/13

DRAWING.

kevin

APPROVED

UNIT

MM

APPD.

CKD.

SCALE

TOLERANCE

± 0.5

PART NAME

IDC SHROUD HEADER
WITH LONG LATCH

PART NO.

C9800-XXXLXX00 R

REV.

A