


LHS series 105°C 2000 hours

- Rohs requirements
- 105°C 2000 hours series
- Used for switching power supply, servo, inverter, and other industrial products
- Product description

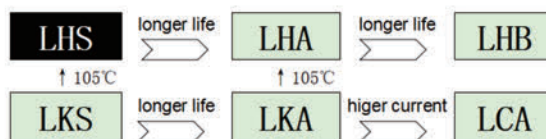

Item	Characteristic					
Operating temperature range	-40°C ~ +105°C			-25°C ~ +105°C		
Rated voltage(WV/V)	63V ~ 450V			460V ~ 550V		
Capacitance(CAP/C)	68 ~ 10000μF					
Tolerance(CAP/C)	±20% (25°C, 120Hz)					
Leakage current LC/I(25°C, 120Hz)	LC≤0.01CV(μA) Or 1.5mA, whichever is smaller (25°C, 5Min) C=Nominal capacitance(μF),V=Working voltage(V)					
Dissipation factor DF/tanδ(25°C, 120Hz)	UR(V)	63	80 ~ 100	160 ~ 450	460 ~ 550	
	DF	0.25	0.20	0.15	0.15	
Temperature characteristics (Impedance ratio at 120Hz)	UR(V)		63~100	160~200	250~450	460 ~ 500
	Z(-25°C/Z(+25°C)		4			
	Z(-40°C/Z(+25°C)		15	10	8	-
Temperature characteristics (Capacitance ratio at 120hz)	C(-40°C/C(+25°C)≥0.6					
	C(-25°C/C(+25°C)≥0.7					

	Working lifetime		Standard lifetime	Durability	High temperature storage
Load time	4000h	> 180000h	2000h	3000h	1000h
Leakage current	Within rated specification value		Within rated specification value	Within rated specification value	Within rated specification value
Capacitance change	Within ±30% of initial value		Within ±20% of initial value	Within ±20% of initial value	Within ±20% of initial value
Dissipation factor	Within 300% of rated specification value		Within 200% of rated specification value	Within 200% of rated specification value	Within 200% of rated specification value
Environmental condition:	UR	UR	UR	UR	UR = 0
Applied voltage	IR	1.2×IR	IR	IR = 0	IR = 0
Applied current					
Application temperature	105°C	40°C	105°C	105°C	105°C

Apply the rated operating voltage UR 30 minutes and test after 24 hours of recovery.

■ Ripple current correction factor


Temp.°C	40	55	85	105
UR(V)				
<160	2.1	1.8	1.5	1.0
≥160	2.7	2.5	1.7	1.0

Freq.	50/60Hz	120Hz	1KHz	10KHz	≥50KHz
UR(V)					
≤100	0.95	1.00	1.13	1.19	1.20
160-250	0.87	1.00	1.32	1.45	1.50
≥315	0.80	1.00	1.30	1.41	1.43


Aluminum electrolytic capacitors age due to self-heating and temperature rise when the ripple current is superimposed, and the use temperature rise will reduce the product life, to keep the product life, please reduce the ripple current during use.

■ Outline drawing Unit:Mm


K-Type(Snap in 2 Pins):

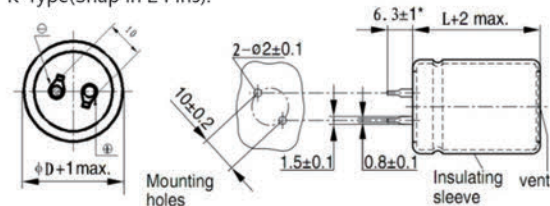


X-Type (Long Lead 2 Pin):

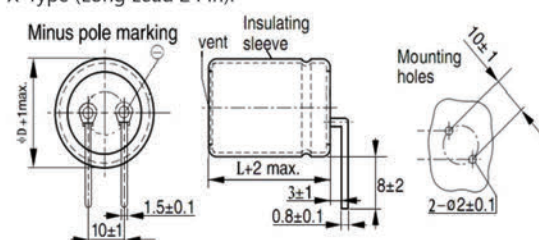

L-Type(Snap in 3 Pins):

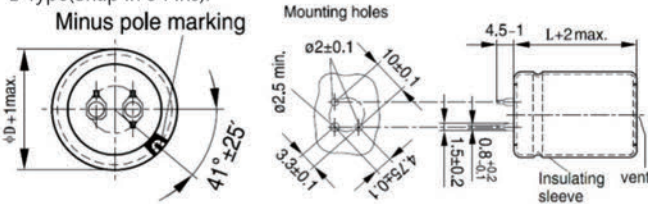

M-Type(Snap in 4 Pins):

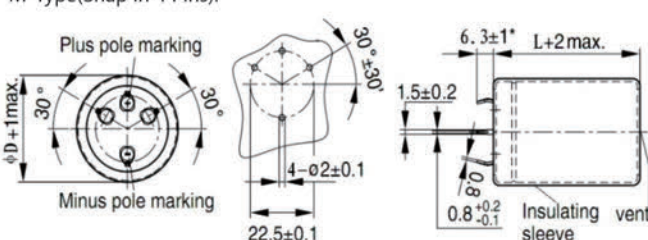

■ LHS series: 105°C 2000 hours, standard snap-in capacitor

WV	CAP 25°C 120Hz	DF 25°C 120Hz	Max ESR 25°C 120Hz	ESR (typ.) 25°C 120Hz	Rated Ripple Current 105°C 120Hz	Size ΦD×L	Code P/N
(VDC)	(μF)	-	(mΩ)	(mΩ)	(Arms)	(mm)	-
63 1J (79)	1200	0.25	233	155	1.30	22x25	LHS1J122MP025***
	1800	0.25	155	103	1.50	22x30	LHS1J182MP030***
		0.25	155	103	1.50	25x25	LHS1J182MQ025***
	2200	0.25	126	84	1.70	22x35	LHS1J222MP035***
		0.25	126	84	1.80	25x30	LHS1J222MQ030***
	2700	0.25	104	69	2.00	22x40	LHS1J272MP040***
		0.25	104	69	2.00	25x35	LHS1J272MQ035***
		0.25	104	69	2.00	30x25	LHS1J272MR025***
	3300	0.25	84	56	2.30	22x50	LHS1J332MP050***
		0.25	84	56	2.30	25x40	LHS1J332MQ040***
		0.25	84	56	2.30	30x30	LHS1J332MR030***
		0.25	84	56	2.40	35x25	LHS1J332MS025***
	3900	0.25	72	48	2.40	25x45	LHS1J392MQ045***
		0.25	72	48	2.60	30x35	LHS1J392MR035***
	4700	0.25	60	40	2.60	25x50	LHS1J472MQ050***
		0.25	60	40	2.90	30x40	LHS1J472MR040***
		0.25	60	40	2.90	35x30	LHS1J472MS030***
	5600	0.25	50	33	3.30	30x45	LHS1J562MR045***
		0.25	50	33	3.30	35x35	LHS1J562MS035***
	6800	0.25	41	27	3.80	30x50	LHS1J682MR050***
		0.25	41	27	3.70	35x40	LHS1J682MS040***
	8200	0.25	35	23	4.20	35x45	LHS1J822MS045***
	10000	0.25	29	19	4.70	35x50	LHS1J103MS050***
80 1K (100)	820	0.20	330	220	1.10	22x25	LHS1K821KP025***
	1000	0.20	280	185	1.30	22x25	LHS1K102MP025***
	1200	0.20	233	155	1.40	22x30	LHS1K122MP030***
		0.20	233	155	1.40	25x25	LHS1K122MQ025***
	1500	0.20	188	125	1.60	22x35	LHS1K152MP035***
		0.20	188	125	1.60	25x30	LHS1K152MQ030***
	1800	0.20	155	103	1.80	22x40	LHS1K182MP040***
		0.20	155	103	1.80	30x25	LHS1K182MR025***
	2200	0.20	126	84	2.00	25x35	LHS1K222MQ035***
		0.20	126	84	2.10	30x30	LHS1K222MR030***
		0.20	126	84	2.20	35x25	LHS1K222MS025***
		0.20	104	69	2.50	25x45	LHS1K272MQ045***
	2700	0.20	104	69	2.50	30x35	LHS1K272MR035***
		0.20	104	69	2.50	30x35	LHS1K272MR035***
	3300	0.20	84	56	2.80	30x40	LHS1K332MR040***
		0.20	84	56	2.70	35x30	LHS1K332MS030***
	3900	0.20	72	48	3.20	30x45	LHS1K392MR045***
		0.20	72	48	3.10	35x35	LHS1K392MS035***
	4700	0.20	60	40	3.60	30x50	LHS1K472MR050***
		0.20	60	40	3.50	35x40	LHS1K472MS040***
	5600	0.20	50	33	3.90	35x45	LHS1K562MS045***
	6800	0.20	41	27	4.20	35x50	LHS1K682MS050***

WV	CAP 25°C 120Hz	DF 25°C 120Hz	Max ESR 25°C 120Hz	ESR (typ.) 25°C 120Hz	Rated Ripple Current 105°C 120Hz	Size ΦD×L	Code P/N
(VDC)	(μF)	-	(mΩ)	(mΩ)	(Arms)	(mm)	-
100 2A (125)	560	0.20	495	330	1.10	22x25	LHS2A561MP025***
	820	0.20	338	225	1.40	22x30	LHS2A821MP030***
		0.20	338	225	1.40	25x25	LHS2A821MQ025***
	1000	0.20	279	186	1.60	22x35	LHS2A102MP035***
		0.20	279	186	1.60	25x30	LHS2A102MQ030***
	1200	0.20	233	155	1.80	25x35	LHS2A122MQ035***
		0.20	233	155	1.70	30x25	LHS2A122MR025***
		0.20	186	124	2.00	25x40	LHS2A152MQ040***
	1500	0.20	186	124	2.00	30x30	LHS2A152MR030***
		0.20	186	124	2.10	35x25	LHS2A152MS025***
		0.20	155	103	2.30	25x45	LHS2A182MQ045***
	1800	0.20	155	103	2.30	30x35	LHS2A182MR035***
		0.20	126	84	2.60	30x40	LHS2A222MR040***
	2200	0.20	126	84	2.50	35x30	LHS2A222MS030***
		0.20	104	69	3.00	30x45	LHS2A272MR045***
	2700	0.20	104	69	2.90	35x35	LHS2A272MS035***
		0.20	84	56	3.30	30x50	LHS2A332MR050***
	3300	0.20	84	56	3.30	35x40	LHS2A332MS040***
		0.20	72	48	3.70	35x45	LHS2A392MS045***
	3900	0.20	72	48	3.70	35x45	LHS2A392MS045***
	4700	0.20	60	40	4.20	35x50	LHS2A472MS050***
160 2C (200)	330	0.15	630	420	1.20	22x25	LHS2C331MP025***
	390	0.15	533	355	1.40	22x30	LHS2C391MP030***
		0.15	443	295	1.50	22x35	LHS2C471MP035***
	470	0.15	443	295	1.60	25x25	LHS2C471MQ025***
		0.15	374	249	1.60	22x40	LHS2C561MP040***
	560	0.15	374	249	1.70	25x30	LHS2C561MQ030***
		0.15	308	205	1.70	22x45	LHS2C681MP045***
	680	0.15	308	205	1.80	25x35	LHS2C681MQ035***
		0.15	308	205	1.80	30x25	LHS2C681MR025***
		0.15	255	170	2.00	22x50	LHS2C821MP050***
	820	0.15	255	170	2.00	25x40	LHS2C821MQ040***
		0.15	255	170	2.00	30x30	LHS2C821MR030***
		0.15	255	170	2.00	35x25	LHS2C821MS025***
		0.15	209	139	2.00	25x45	LHS2C102MQ045***
	1000	0.15	209	139	2.20	30x35	LHS2C102MR035***
		0.15	174	116	2.20	25x50	LHS2C122MQ050***
	1200	0.15	174	116	2.30	30x40	LHS2C122MR040***
		0.15	174	116	2.40	35x30	LHS2C122MS030***
		0.15	140	93	2.50	30x45	LHS2C152MR045***
	1500	0.15	140	93	2.60	35x35	LHS2C152MS035***
		0.15	116	77	3.00	35x45	LHS2C182MS045***
	1800	0.15	116	77	3.00	35x45	LHS2C182MS045***
	2200	0.15	95	63	3.10	35x50	LHS2C222MS050***
	2700	0.15	77	51	3.80	35x55	LHS2C272MS055***
	3300	0.15	63	42	4.40	35x60	LHS2C332MS060***

■ LHS series: 105°C 2000 hours, standard snap-in capacitor

WV	CAP 25°C 120Hz	DF 25°C 120Hz	Max ESR 25°C 120Hz	ESR (typ.) 25°C 120Hz	Rated Ripple Current 105°C 120Hz	Size ΦD×L	Code P/N
(VDC)	(μF)	-	(mΩ)	(mΩ)	(Arms)	(mm)	-
200 2D (250)	220	0.15	945	630	1.10	22x25	LHS2D221MP025***
	270	0.15	773	515	1.20	22x30	LHS2D271MP030***
	330	0.15	630	420	1.30	22x30	LHS2D331MP030***
		0.15	630	420	1.40	25x25	LHS2D331MQ025***
	390	0.15	533	355	1.40	22x35	LHS2D391MP035***
	470	0.15	441	296	1.50	22x40	LHS2D471MP040***
		0.15	441	296	1.50	25x30	LHS2D471MQ030***
		0.15	441	296	1.60	30x25	LHS2D471MR025***
	560	0.15	372	249	1.60	22x45	LHS2D561MP045***
		0.15	372	249	1.70	25x35	LHS2D561MQ035***
	680	0.15	308	205	1.80	22x50	LHS2D681MP050***
		0.15	308	205	1.80	25x40	LHS2D681MQ040***
		0.15	308	205	1.80	30x30	LHS2D681MR030***
		0.15	308	205	2.00	35x25	LHS2D681MS025***
	820	0.15	255	170	2.00	30x35	LHS2D821MR035***
		0.15	255	170	2.10	35x30	LHS2D821MS030***
	1000	0.15	209	139	2.20	30x45	LHS2D102MR045***
		0.15	209	139	2.20	35x35	LHS2D102MS035***
	1200	0.15	174	116	2.20	30x50	LHS2D122MR050***
		0.15	174	116	2.50	35x40	LHS2D122MS040***
	1500	0.15	140	93	2.60	35x45	LHS2D152MS045***
	1800	0.15	116	77	2.70	35x50	LHS2D182MS050***
	2200	0.15	95	63	3.30	35x60	LHS2D222MS060***
250 2E (300)	180	0.15	1155	770	0.94	22x25	LHS2E181MP025***
	220	0.15	945	630	1.10	22x30	LHS2E221MP030***
		0.15	945	630	1.20	25x25	LHS2E221MQ025***
	270	0.15	773	515	1.20	22x35	LHS2E271MP035***
	330	0.15	633	422	1.20	22x40	LHS2E331MP040***
		0.15	633	422	1.30	25x30	LHS2E331MQ030***
		0.15	633	422	1.40	30x25	LHS2E331MR025***
	390	0.15	536	357	1.30	22x45	LHS2E391MP045***
		0.15	536	357	1.40	25x35	LHS2E391MQ035***
	470	0.15	444	296	1.40	22x50	LHS2E471MP050***
		0.15	444	296	1.50	25x40	LHS2E471MQ040***
		0.15	444	296	1.40	30x30	LHS2E471MR030***
		0.15	444	296	1.40	35x25	LHS2E471MS025***
	560	0.15	355	249	1.60	25x45	LHS2E561MQ045***
		0.15	355	249	1.60	30x35	LHS2E561MR035***
		0.15	355	249	1.60	35x30	LHS2E561MS030***
	680	0.15	293	205	1.70	25x50	LHS2E681MQ050***
		0.15	293	205	1.80	30x40	LHS2E681MR040***
	820	0.15	243	170	1.90	25x60	LHS2E821MQ060***
		0.15	243	170	1.90	30x45	LHS2E821MR045***
		0.15	243	170	1.80	35x35	LHS2E821MS035***

WV	CAP 25°C 120Hz	DF 25°C 120Hz	Max ESR 25°C 120Hz	ESR (typ.) 25°C 120Hz	Rated Ripple Current 105°C 120Hz	Size ΦD×L	Code P/N
(VDC)	(μF)	-	(mΩ)	(mΩ)	(Arms)	(mm)	-
250 2E (300)	1000	0.15	199	139	1.90	30x50	LHS2E102MR050***
		0.15	199	139	2.00	35x40	LHS2E102MS040***
	1200	0.15	166	116	2.10	35x45	LHS2E122MS045***
	1500	0.15	133	93	2.70	35x50	LHS2E152MS050***
	1800	0.15	111	77	3.00	35x60	LHS2E182MS060***
350 2V (400)	68	0.15	2927	1610	0.60	22x25	LHS2V680MP025***
	100	0.15	1990	1095	0.70	22x30	LHS2V101MP030***
		0.15	1990	1095	0.70	25x25	LHS2V101MQ025***
	120	0.15	1659	912	0.73	22x35	LHS2V121MP035***
	150	0.15	1327	730	0.80	22x40	LHS2V151MP040***
		0.15	1327	730	0.82	25x30	LHS2V151MQ030***
		0.15	1327	730	0.82	30x25	LHS2V151MR025***
	180	0.15	1106	608	0.81	22x45	LHS2V181MP045***
		0.15	1106	608	0.90	25x35	LHS2V181MQ035***
		0.15	1106	608	0.90	30x30	LHS2V181MR030***
	220	0.15	905	498	0.93	22x50	LHS2V221MP050***
		0.15	905	498	0.97	25x40	LHS2V221MQ040***
		0.15	905	498	0.98	35x25	LHS2V221MS025***
	270	0.15	737	406	1.10	25x50	LHS2V271MQ050***
		0.15	737	406	1.10	30x35	LHS2V271MR035***
		0.15	737	406	1.10	35x30	LHS2V271MS030***
	330	0.15	603	332	1.20	30x45	LHS2V331MR045***
		0.15	603	332	1.20	35x35	LHS2V331MS035***
	390	0.15	510	281	1.30	30x50	LHS2V391MR050***
		0.15	510	281	1.40	35x40	LHS2V391MS040***
470	0.15	424	233	1.40	35x45	LHS2V471MS045***	
560	0.15	355	196	1.50	35x50	LHS2V561MS050***	
680	0.15	293	161	2.00	35x55	LHS2V681MS055***	
820	0.15	242	133	2.30	35x60	LHS2V821MS060***	
1000	0.15	220	110	2.60	35x60	LHS2V102MS060***	
400 2G (450)	82	0.15	2430	1200	0.56	22x25	LHS2G820MP025***
	100	0.15	1995	1000	0.61	22x30	LHS2G101MP030***
		0.15	1995	1000	0.61	25x25	LHS2G101MQ025***
	120	0.15	1660	860	0.65	22x35	LHS2G121MP035***
		0.15	1660	860	0.65	25x30	LHS2G121MQ030***
		0.15	1660	860	0.71	30x25	LHS2G121MR025***
		0.15	1330	690	0.73	22x40	LHS2G151MP040***
	150	0.15	1330	690	0.73	25x25	LHS2G151MQ025***
		0.15	1330	690	0.73	30x25	LHS2G151MR025***
		0.15	1110	580	0.82	22x40	LHS2G181MP040***
	180	0.15	1110	580	0.82	25x30	LHS2G181MQ030***
		0.15	1110	580	0.82	22x45	LHS2G181MP045***
		0.15	1110	580	0.82	30x30	LHS2G181MR030***
		0.15	1110	580	0.82	35x25	LHS2G181MS025***

■ LHS series: 105°C 2000 hours, standard snap-in capacitor

WV	CAP 25°C 120Hz	DF 25°C 120Hz	Max ESR 25°C 120Hz	ESR (typ.) 25°C 120Hz	Rated Ripple Current 105°C 120Hz	Size ΦD×L	Code P/N
(VDC)	(μF)	-	(mΩ)	(mΩ)	(Arms)	(mm)	-
400 2G (450)	220	0.15	910	470	0.91	22x50	LHS2G221MP050***
		0.15	910	470	0.91	25x45	LHS2G221MQ045***
		0.15	910	470	0.91	30x30	LHS2G221MR030***
	270	0.15	740	380	0.96	22x60	LHS2G271MP060***
		0.15	740	380	0.96	25x45	LHS2G271MQ045***
		0.15	740	380	0.96	30x35	LHS2G271MR035***
		0.15	740	380	0.96	35x30	LHS2G271MS030***
	330	0.15	610	310	1.13	25x55	LHS2G331MQ055***
		0.15	610	310	1.13	30x40	LHS2G331MR040***
		0.15	610	310	1.13	35x35	LHS2G331MS035***
	390	0.15	515	260	1.27	22x65	LHS2G391MP065***
		0.15	515	260	1.27	25x50	LHS2G391MQ050***
		0.15	515	260	1.27	30x40	LHS2G391MR040***
		0.15	515	260	1.27	35x35	LHS2G391MS035***
	470	0.15	425	220	1.33	22x75	LHS2G471MP075***
		0.15	425	220	1.33	25x60	LHS2G471MQ060***
		0.15	425	220	1.33	30x45	LHS2G471MR045***
		0.15	425	220	1.33	30x50	LHS2G471MR050***
		0.15	425	220	1.33	35x40	LHS2G471MS040***
		0.15	425	220	1.33	35x45	LHS2G471MS045***
	560	0.15	360	185	1.52	22x90	LHS2G561MP090***
		0.15	360	185	1.52	25x70	LHS2G561MQ070***
		0.15	360	185	1.52	30x60	LHS2G561MR060***
		0.15	360	185	1.52	35x50	LHS2G561MS050***
		0.15	360	185	1.52	35x55	LHS2G561MS055***
	680	0.15	290	150	1.91	25x80	LHS2G681MQ080***
		0.15	290	150	1.91	30x70	LHS2G681MR070***
		0.15	290	150	1.91	35x45	LHS2G681MS045***
		0.15	290	150	1.91	35x50	LHS2G681MS050***
	820	0.15	240	125	2.22	25x90	LHS2G821MQ090***
		0.15	240	125	2.22	30x80	LHS2G821MR080***
		0.15	240	125	2.22	35x50	LHS2G821MS050***
		0.15	240	125	2.22	35x55	LHS2G821MS055***
		0.15	240	125	2.22	35x60	LHS2G821MS060***
	1000	0.15	200	110	2.61	25x110	LHS2G102MQ110***
		0.15	200	110	2.61	30x80	LHS2G102MR080***
		0.15	200	110	2.61	35x60	LHS2G102MS060***
		0.15	200	110	2.61	35x65	LHS2G102MS065***
		0.15	200	110	2.61	35x70	LHS2G102MS070***
		0.15	200	110	2.61	35x75	LHS2G102MS075***
		0.15	200	110	2.61	40x50	LHS2G102MB050***
		0.15	200	110	2.61	40x60	LHS2G102MB060***
		0.15	200	110	2.61	45x50	LHS2G102MV050***

WV	CAP 25°C 120Hz	DF 25°C 120Hz	Max ESR 25°C 120Hz	ESR (typ.) 25°C 120Hz	Rated Ripple Current 105°C 120Hz	Size ΦD×L	Code P/N
(VDC)	(μF)	-	(mΩ)	(mΩ)	(Arms)	(mm)	-
400 2G (450)	1200	0.15	180	105	3.0	30x100	LHS2G122MR100***
		0.15	180	100	3.0	35x63	LHS2G122MS063***
		0.15	180	100	3.0	35x65	LHS2G122MS065***
		0.15	180	105	3.0	35x70	LHS2G122MS070***
		0.15	180	105	3.0	35x80	LHS2G122MS080***
		0.15	180	100	3.0	35x85	LHS2G122MS085***
		0.15	180	100	3.0	40x50	LHS2G122MB050***
		0.15	180	100	3.0	40x60	LHS2G122MB060***
		0.15	180	100	3.0	40x70	LHS2G122MB070***
		0.15	180	100	3.0	40x80	LHS2G122MB080***
		0.15	180	100	3.0	45x50	LHS2G122MV050***
		0.15	180	100	3.0	45x50	LHS2G122MV050***
	1500	0.15	160	90	3.5	35x75	LHS2G152MS075***
		0.15	160	90	3.5	35x80	LHS2G152MS080***
		0.15	160	90	3.5	35x85	LHS2G152MS085***
		0.15	160	90	3.5	35x90	LHS2G152MS090***
		0.15	160	90	3.5	35x100	LHS2G152MS100***
		0.15	160	90	3.5	40x80	LHS2G152MB080***
		0.15	160	90	3.5	45x70	LHS2G152MV070***
		0.15	160	90	3.5	45x75	LHS2G152MV075***
	1800	0.15	140	80	3.9	35x88	LHS2G182MS088***
		0.15	140	80	3.9	35x90	LHS2G182MS090***
		0.15	140	80	3.9	35x95	LHS2G182MS095***
		0.15	140	80	3.9	35x100	LHS2G182MS100***
		0.15	140	80	3.9	40x80	LHS2G182MB080***
		0.15	140	80	3.9	40x85	LHS2G182MB085***
		0.15	140	80	3.9	40x90	LHS2G182MB090***
		0.15	140	80	3.9	40x100	LHS2G182MB100***
	2200	0.15	120	70	4.2	35x110	LHS2G222MS110***
		0.15	120	70	4.2	40x90	LHS2G222MB090***
		0.15	120	70	4.2	40x95	LHS2G222MB095***
		0.15	120	70	4.2	40x100	LHS2G222MB100***
		0.15	120	70	4.2	40x110	LHS2G222MB110***
		0.15	120	70	4.2	45x70	LHS2G222MV070***
	2500	0.15	110	65	4.5	40x90	LHS2G252MB090***
		0.15	110	65	4.5	45x80	LHS2G252MV080***
		0.15	110	65	4.5	45x90	LHS2G252MV090***
	2700	0.15	100	60	4.8	40x100	LHS2G272MB100***
		0.15	100	60	4.8	45x80	LHS2G272MV080***
		0.15	100	60	4.8	45x90	LHS2G272MV090***
	3300	0.15	90	55	5.1	40x120	LHS2G332MB120***
		0.15	90	55	5.1	45x95	LHS2G332MV095***
		0.15	90	55	5.1	45x100	LHS2G332MV100***

■ LHS series: 105°C 2000 hours, standard snap-in capacitor

WV	CAP 25°C 120Hz	DF 25°C 120Hz	Max ESR 25°C 120Hz	ESR (typ.) 25°C 120Hz	Rated Ripple Current 105°C 120Hz	Size ΦD×L	Code P/N	WV	CAP 25°C 120Hz	DF 25°C 120Hz	Max ESR 25°C 120Hz	ESR (typ.) 25°C 120Hz	Rated Ripple Current 105°C 120Hz	Size ΦD×L	Code P/N
(VDC)	(μF)	-	(mΩ)	(mΩ)	(Arms)	(mm)	-	(VDC)	(μF)	-	(mΩ)	(mΩ)	(Arms)	(mm)	-
450 2W (500)	68	0.15	3900	1950	0.57	22x30	LHS2W680MP030***	500 2H (550)	68	0.15	3900	1950	0.56	22x30	LHS2W680MP030***
	82	0.15	3200	1610	0.68	25x35	LHS2W820MQ035***		82	0.15	3200	1600	0.65	25x35	LHS2W820MQ035***
	100	0.15	2650	1320	0.72	22x35	LHS2W101MP035***		100	0.15	2500	1300	0.67	30x25	LHS2H101MR025***
		0.15	2650	1320	0.73	25x30	LHS2W101MQ030***		120	0.15	2200	1100	0.77	30x30	LHS2H121MR030***
	120	0.15	2210	1100	0.75	22x40	LHS2W121MP040***			0.15	2200	1100	0.72	35x25	LHS2H121MS025***
		0.15	2210	1100	0.75	25x35	LHS2W121MQ035***		150	0.15	1700	880	0.85	25x40	LHS2H151MQ040***
		0.15	2210	1100	0.75	30x30	LHS2W121MR030***			0.15	1700	880	0.85	30x35	LHS2H151MR035***
		0.15	2210	1100	0.75	35x25	LHS2W121MS025***		180	0.15	1400	700	1.01	30x40	LHS2H181MR040***
	150	0.15	1760	880	0.85	22x40	LHS2W151MP040***			0.15	1400	700	1.01	35x30	LHS2H181MS030***
		0.15	1760	880	0.85	25x35	LHS2W151MQ035***		220	0.15	1200	600	1.12	30x45	LHS2H221MR045***
		0.15	1760	880	0.85	30x30	LHS2W151MR030***			0.15	1200	600	1.12	35x35	LHS2H221MS035***
		0.15	1760	880	0.85	35x25	LHS2W151MS025***		270	0.15	980	450	1.29	30x50	LHS2H271MR050***
	220	0.15	1760	880	0.85	35x30	LHS2W151MS030***			0.15	980	450	1.28	35x40	LHS2H271MS040***
		0.15	1200	600	0.95	25x50	LHS2W221MQ050***		330	0.15	800	400	1.45	30x60	LHS2H331MR060***
		0.15	1200	600	0.95	30x40	LHS2W221MR040***			0.15	800	400	1.45	35x45	LHS2H331MS045***
	270	0.15	1200	600	0.95	35x30	LHS2W221MS030***		390	0.15	650	330	1.41	30x70	LHS2H391MR070***
		0.15	980	490	1.13	25x50	LHS2W271MQ050***			0.15	650	330	1.41	35x50	LHS2H391MS050***
		330	0.15	980	490	1.13	30x40	LHS2W271MR040***	470	0.15	560	280	1.55	30x80	LHS2H471MR080***
	0.15		980	490	1.13	35x35	LHS2W271MS035***	0.15		560	280	1.55	35x55	LHS2H471MS055***	
	390		0.15	800	400	1.26	25x55	LHS2W331MQ055***	560	0.15	470	230	1.7	30x90	LHS2H561MR090***
		0.15	800	400	1.26	30x45	LHS2W331MR045***	0.15		470	230	1.7	35x65	LHS2H561MS065***	
		470	0.15	800	400	1.26	35x35	LHS2W331MS035***	680	0.15	390	190	2.2	30x110	LHS2H681MR110***
	0.15		680	330	1.33	30x50	LHS2W391MR050***	0.15		390	190	2.2	35x70	LHS2H681MS070***	
	560		0.15	680	330	1.33	35x35	LHS2W391MS035***	820	0.15	310	160	2.6	35x80	LHS2H821MS080***
		0.15	560	280	1.51	25x65	LHS2W471MQ065***	0.15		310	160	2.6	40x70	LHS2H821MB070***	
		680	0.15	560	280	1.51	30x50	LHS2W471MR050***	1000	0.15	270	130	2.8	35x90	LHS2H102MS090***
	0.15		560	280	1.51	35x45	LHS2W471MS045***	0.15		270	130	2.8	40x80	LHS2H102MB080***	
	820		0.15	470	230	1.73	25x75	LHS2W561MQ075***	550 2Y (600)	180	0.15	1470	750	1.08	30x50
		0.15	470	230	1.73	30x60	LHS2W561MR060***	0.15			1470	750	1.08	35x35	LHS2Y181MS035***
		0.15	470	230	1.73	35x50	LHS2W561MS050***	220		0.15	1206	600	1.20	30x55	LHS2Y221MR055***
	820	0.15	390	190	2.02	30x70	LHS2W681MR070***			0.15	1206	600	1.20	35x40	LHS2Y221MS040***
		0.15	390	190	2.02	35x50	LHS2W681MS050***	270		0.15	990	493	1.32	35x45	LHS2Y271MS045***
	1000	0.15	320	160	2.33	30x80	LHS2W821MR080***			0.15	810	425	1.48	35x50	LHS2Y331MS050***
		0.15	320	160	2.33	35x60	LHS2W821MS060***	390		0.15	681	340	1.62	35x60	LHS2Y391MS060***
	1500	0.15	300	140	2.6	30x90	LHS2W102MR090***			0.15	560	280	1.95	35x70	LHS2Y471MS070***
		0.15	300	140	2.7	35x70	LHS2W102MS070***	560		0.15	473	237	2.10	35x80	LHS2Y561MS080***
	1800	0.15	280	120	3.01	35x90	LHS2W152MS090***			0.15	473	237	2.10	40x70	LHS2Y561MB070***
		0.15	280	120	3.01	40x70	LHS2W152MB070***	680		0.15	500	395	2.40	35x80	LHS2Y681MS080***
	2200	0.15	260	120	3.35	35x110	LHS2W182MS110***			0.15	500	395	2.40	40x60	LHS2Y681MB060***
		0.15	260	120	3.35	40x90	LHS2W182MB090***	820		0.15	460	351	2.60	35x100	LHS2Y821MS100***
		0.15	240	180	3.69	40x110	LHS2W222MB110***			0.15	460	351	2.60	40x80	LHS2Y821MB080***
		0.15	240	180	3.69	45x90	LHS2W222MV090***	1000		0.15	400	305	2.80	45x80	LHS2Y102MV080***

*** Indicates terminal type, length, and sleeve color.

If you need to know more about product specifications, sizes and other relevant data, if not fully listed, you can contact through phone, wechat and other tools to understand.

The content recorded in the catalog book may be changed without notification. Your company is requested to require us to provide specifications when purchasing and using, and use it as the standard.