



TRD


TRDT with TV-5 Approval

MAIN FEATURES


- Switching capacity available by 12A in spite of small size design for high density P.C. board mounting technique.
- UL/CSA recognized. TRDT (TV-5 Approval).
- Selection of plastic material for high temperature and better chemical solution performance.
- Sealed types available.
- Simple relay magnetic circuit to meet massproduction for low cost offer.

APPLICATIONS

- TRD : • Domestic appliance, office machines, audio, equipment, cars, etc.
- TRDT : • Remote control TV receivers, monitor displays, audio equipment high rushing current use application.



ORDERING INFORMATION



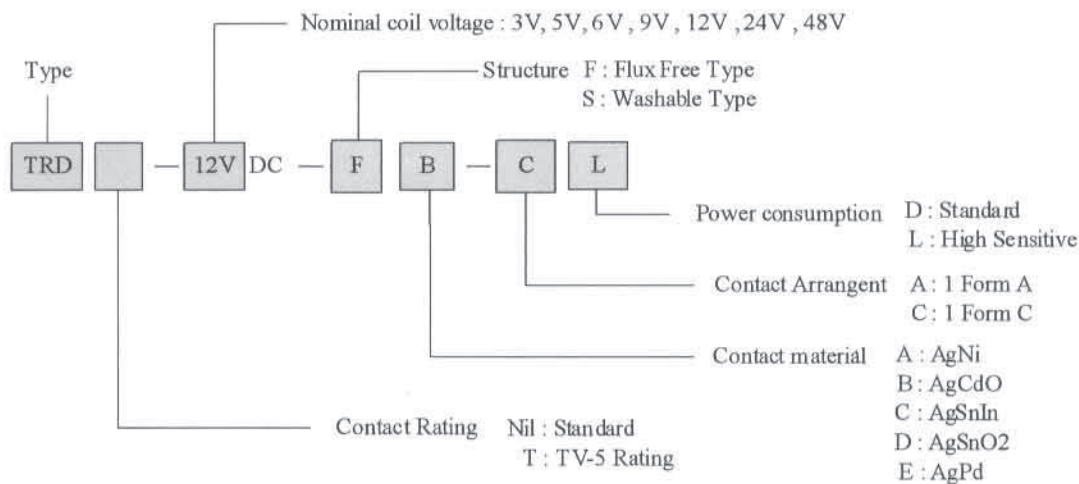


DIMENSION (unit:mm)




DRILLING (unit:mm)

WIRING DIAGRAM

TRD 1 Form A AND TRDT(TV-5)

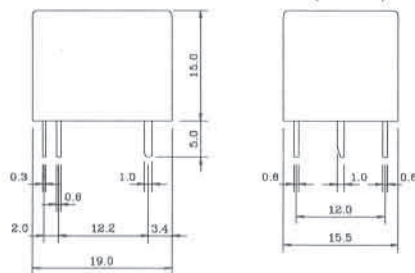

TRD 1 Form C

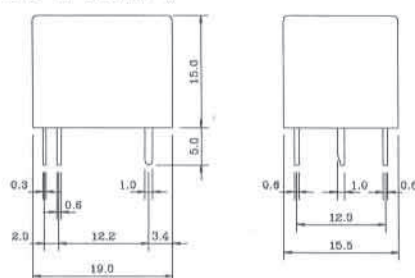

■ COIL DATA CHART (AT20°C)

Coil Sensitivity	Coil Voltage Code	Nominal Voltage (VDC)	Nominal Current (mA)	Coil Resistance (Ω) $\pm 10\%$	Power Consumption (W)	Pull-In Voltage (VDC)	Drop-Out Voltage (VDC)	Max-Allowable Voltage (VDC)
TRD (High Sensitivity)	03	03	120	25	abt. 0.36W	75% Max.	5% Min.	120%
	05	05	71.4	70				
	06	06	60	100				
	09	09	40	225				
	12	12	30	400				
	24	24	15	1600				
TRD (Standard)	48	48	7.5	6400				
	03	03	150	20	abt. 0.45W	75% Max.	5% Min.	110%
	05	05	89.3	55				
	06	06	75	80				
	09	09	50	180				
	12	12	37.5	320				
	24	24	18.7	1280				
	48	48	10	4500	abt. 0.51W			

■ CONTACT RATING


Item	Type	TRD		TRDT
		12A	15A	
Contact Capacity		12A 28VDC	15A 28VDC	AC 120V TV-5 (Incandescent Lamp 5A)
Resistive Load ($\cos\Phi=1$)		12A 125VAC 6A 250VAC	15A 125VAC 6A 250VAC	
Inductive Load ($\cos\Phi=0.4$ L/R=7msec)		4A 120VAC 4A 28VDC	7A 120VAC 7A 28VDC	
Rated Carrying Current		12A	15A	15A
Max. Allowable Voltage		240VAC/110VDC	240VAC/110VDC	240VAC/110VDC
Max. Allowable Current		12A	15A	15A
Max. Allowable Power Force		1200VAC/240W	600VA, 300W	600VA, 300W
Referenced Min. Applicable Load		DC5V, 10mA	DC5V, 10mA	DC10V, 10mA
Contact Material		AgCdO	Ag Alloy	Ag Alloy

■ PERFORMANCE (at initial value)


Item	Type	TRD
Contact Resistance		100m Ω Max.
Operate Time		10msec Max.
Release Time		5msec Max.
Dielectric Strength		
Between coil & contact		AC 1000V 50/60HZ (1 minute)
Between contacts		AC 500V 50/60HZ (1 minute)
Surge Resistiveness		3000V (between coil & contact 1x40 usec)
Insulation Resistance		100 M Ω Min. (DC500V)
Max. ON/OFF Switching		
Mechanically		300 operation/min
Electrically		30 operation/min
Operating Ambient Temperature		-30°C to +55°C (No water condensation and no water drop)
Operating Humidity		45 to 85% RH
Coil Temperature Rise		35 deg. Max.
Vibration		
Endurance		10 to 55Hz Single Amplitude 1.5mm
Error Operation		10 to 55Hz Single Amplitude 1.5mm
Shock		
Endurance		100G Min.
Error Operation		10G Min.
Life Expectancy		
Mechanically		10 $\times$ 10 ⁶ operations. Min. (no load)
Electrically		10 $\times$ 10 ⁴ operations. Min. (at rated coil voltage)
Weight		abt. 10grs.
UL File No.		E156521 (TV-5)
CSA File No.		LR102317
TUV File No.		R9653009

■ REFERENCIAL DATA


Coil temperature rise



Operate time



Life expectancy



Life expectancy

