


Insulated Ring Terminal

圆形预绝缘端头

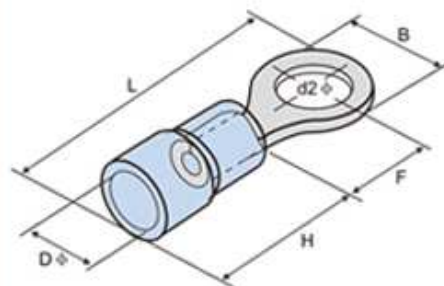

Cable size: 0.5~1.5mm² (A.W.G. 22~16) max current: I_{max}=19A material: copper Insulating material: vinyl, nylon thickness: 0.75mm
导线截面 0.5~1.5mm² (美国线规 22~16) 最大电流: I_{max}=19A 材质: 紫铜 材料厚度: 0.75mm

ITEM NO 型号	USA screw 美制螺栓号	Screw dia. d2 螺栓口直径 (mm)	Dimension 尺寸 (mm)					Color 颜色
			B	L	F	H	D	
RV 1.25-3	#4	3.2	5.7	17.8	4.95	10.5	4.3	Red 红
RVS 1.25-3.5	#6	3.7	5.7	17.8	4.95			
RVM 1.25-3.5	#6	3.7	6.6	20.1	6.3			
RVL 1.25-3.5	#6	4.3	8.0	21.5	7.0			
RVS 1.25-4	#8	4.3	6.6	20.1	6.3			
RVL 1.25-4	#8	4.3	8.0	21.5	7.0			
RV 1.25-5	#10	5.3	8.0	21.5	7.0			
RVL 1.25-5	#10	5.3	9.8	23.0	7.8			
RV 1.25-6	1/4	6.4	11.6	27.5	11.1			
RV 1.25-8	5/16	8.4	11.6	27.5	11.1			
RV 1.25-10	3/8	10.5	13.6	31.6	13.9			
RV 1.25-12	1/2	13.0	19.2	36.0	16.5			

Cable size: 1.5~2.5mm² (A.W.G. 16~14) max current: I_{max}=27A material: copper Insulating material: vinyl, nylon thickness: 0.8mm
导线截面 1.5~2.5mm² (美国线规 16~14) 最大电流: I_{max}=27A 材质: 紫铜 材料厚度: 0.8mm

ITEM NO 型号	USA screw 美制螺栓号	Screw dia. d2 螺栓口直径 (mm)	Dimension 尺寸 (mm)					Color 颜色
			B	L	F	H	D	
RV 2-3	#4	3.2	6.6	18.5	4.8	10.5	4.9	Blue 蓝
RVS 2-3.5	#6	3.7	6.6	18.5	4.8			
RVM 2-3.5	#6	3.7	6.6	21.0	7.0			
RVL 2-3.5	#6	3.7	8.5	22.0	7.75			
RVS 2-4	#8	4.3	6.6	21.0	7.0			
RVL 2-4	#8	4.3	8.5	22.0	7.75			
RVS 2-5	#10	5.3	8.5	22.0	7.75			
RVL 2-5	#10	5.3	9.5	22.0	7.25			
RV 2-6	1/4	6.4	12.0	27.6	11.0			
RV 2-8	5/16	8.4	12.0	27.6	11.0			
RV 2-10	3/8	10.5	14.6	31.0	13.9			
RV 2-12	1/2	13.0	19.2	36.0	16.5			