




www.vishay.com

CRCW-HP e3

Vishay Draloric

Pulse Proof, High Power Thick Film Chip Resistors



ADDITIONAL RESOURCES



The pulse proof, high power thick film chip resistors series is the perfect choice for most fields of power measurement electronics where reliability, stability, high power rating and excellent pulse load performance are of major concern. Typical applications include battery management systems in automotive appliances.

FEATURES

- Excellent pulse load capability
- Enhanced power rating
- Double side printed resistor element
- AEC-Q200 qualified
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912



RoHS
COMPLIANT
HALOGEN
FREE

APPLICATIONS

- Automotive
- Industrial
- Commercial
- High power

TECHNICAL SPECIFICATIONS								
DESCRIPTION	CRCW0402-HP e3	CRCW0603-HP e3	CRCW0805-HP e3	CRCW1206-HP e3	CRCW1210-HP e3	CRCW1218-HP e3	CRCW2010-HP e3	CRCW2512-HP e3
Imperial size	0402	0603	0805	1206	1210	1218	2010	2512
Metric size code	RR1005M	RR1608M	RR2012M	RR3216M	RR3225M	RR3246M	RR5025M	RR6332M
Resistance range	1 Ω to 1 M Ω ; jumper (0 Ω)							
Resistance tolerance	$\pm 5\%$; $\pm 1\%$; $\pm 0.5\%$							
Temperature coefficient	± 200 ppm/K; ± 100 ppm/K							
Rated dissipation, P_{70} (1)	0.2 W (2)	0.33 W	0.5 W	0.75 W (3)	0.75 W	1.5 W	1.0 W	1.5 W
Operating voltage, U_{max} , AC/DC	50 V	75 V	150 V	200 V	200 V	200 V	400 V	500 V
Permissible film temperature, θ_{Fmax} (1)	155 $^{\circ}$ C							
Operating temperature range	-55 $^{\circ}$ C to +155 $^{\circ}$ C							
Max. resistance change at P_{70} for resistance range, $[\Delta R/R]$ after:								
1000 h	$\leq 2.0\%$							
8000 h	$\leq 4.0\%$							
Permissible voltage against ambient (insulation):								
1 min, U_{ins}	75 V	100 V	200 V	300 V	300 V	300 V	300 V	300 V

Notes

- Marking: see document "Surface Mount Resistor Marking" (www.vishay.com/doc?20020)

(1) Please refer to APPLICATION INFORMATION below

(2) CRCW0402-HP resistors feature a single side printed resistive layer only

(3) Specified power rating requires a thermal resistance of $R_{th} = 110$ K/W

APPLICATION INFORMATION

When the resistor dissipates power, a temperature rise above the ambient temperature occurs, dependent on the thermal resistance of the assembled resistor together with the printed circuit board. The rated dissipation applies only if the permitted film temperature is not exceeded.

These resistors do not feature a limited lifetime when operated within the permissible limits. However, resistance value drift increasing over operating time may result in exceeding a limit acceptable to the specific application, thereby establishing a functional lifetime.

Revision: 14-Nov-2019

1

For technical questions, contact: thickfilmchip@vishay.com

Document Number: 20043

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000



www.vishay.com

CRCW-HP e3

Vishay Draloric

TEMPERATURE COEFFICIENT AND RESISTANCE RANGE				
TYPE / SIZE	TCR	TOLERANCE	RESISTANCE	E-SERIES
CRCW0402-HP e3	± 200 ppm/K	$\pm 5\%$	1 Ω to 1 M Ω	E24
	± 100 ppm/K	$\pm 1\%$	1 Ω to 1 M Ω	E24; E96
	Jumper, $I_{max} = 3$ A	$\pm 0.5\%$	1 Ω to 1 M Ω	E24
CRCW0603-HP e3	± 200 ppm/K	≤ 10 m Ω	0 Ω	-
	± 100 ppm/K	$\pm 5\%$	1 Ω to 1 M Ω	E24
	Jumper, $I_{max} = 5$ A	$\pm 1\%$	1 Ω to 1 M Ω	E24; E96
CRCW0805-HP e3	± 200 ppm/K	$\pm 0.5\%$	0 Ω	-
	± 100 ppm/K	≤ 8 m Ω	1 Ω to 1 M Ω	E24
	Jumper, $I_{max} = 6$ A	$\pm 5\%$	1 Ω to 1 M Ω	E24; E96
CRCW1206-HP e3	± 200 ppm/K	$\pm 1\%$	0 Ω	-
	± 100 ppm/K	≤ 5 m Ω	1 Ω to 1 M Ω	E24
	Jumper, $I_{max} = 10$ A	$\pm 5\%$	1 Ω to 1 M Ω	E24; E96
CRCW1210-HP e3	± 200 ppm/K	$\pm 1\%$	0 Ω	-
	± 100 ppm/K	≤ 5 m Ω	1 Ω to 1 M Ω	E24
	Jumper, $I_{max} = 12$ A	$\pm 0.5\%$	1 Ω to 1 M Ω	E24; E96
CRCW1218-HP e3	± 200 ppm/K	$\pm 5\%$	0 Ω	-
	± 100 ppm/K	≤ 4 m Ω	1 Ω to 1 M Ω	E24
	Jumper, $I_{max} = 20$ A	$\pm 1\%$	1 Ω to 1 M Ω	E24; E96
CRCW2010-HP e3	± 200 ppm/K	$\pm 5\%$	0 Ω	-
	± 100 ppm/K	≤ 5 m Ω	1 Ω to 1 M Ω	E24
	Jumper, $I_{max} = 12$ A	$\pm 1\%$	1 Ω to 1 M Ω	E24; E96
CRCW2512-HP e3	± 200 ppm/K	$\pm 5\%$	0 Ω	-
	± 100 ppm/K	≤ 5 m Ω	1 Ω to 1 M Ω	E24
	Jumper, $I_{max} = 16$ A	$\pm 0.5\%$	1 Ω to 1 M Ω	E24; E96

Note

- The temperature coefficient of resistance (TCR) is not specified for 0 Ω jumpers

PACKAGING						
TYPE / SIZE	CODE	QUANTITY	PACKAGING STYLE	WIDTH	PITCH	PACKAGING DIMENSIONS
CRCW0402-HP e3	ED = ET7 EE = EF4	10 000 50 000	Paper tape acc. to IEC 60286-3, type 1a	8 mm	2 mm	$\varnothing$ 180 mm / 7" $\varnothing$ 330 mm / 13"
CRCW0603-HP e3	EI = ET2 ED = ET3 EL = ET4 EE = ET8	5000 10 000 20 000 20 000			2 mm	$\varnothing$ 180 mm / 7" $\varnothing$ 180 mm / 7" $\varnothing$ 285 mm / 11.25" $\varnothing$ 330 mm / 13"
	EA = ET1 EB = ET5 EC = ET6	5000 10 000 20 000			4 mm	$\varnothing$ 180 mm / 7" $\varnothing$ 285 mm / 11.25" $\varnothing$ 330 mm / 13"
	EA = ET1 EB = ET5 EC = ET6	5000 10 000 20 000			4 mm	$\varnothing$ 180 mm / 7" $\varnothing$ 285 mm / 11.25" $\varnothing$ 330 mm / 13"
CRCW0805-HP e3	EA = ET1 EB = ET5 EC = ET6	5000 10 000 20 000			4 mm	$\varnothing$ 180 mm / 7" $\varnothing$ 285 mm / 11.25" $\varnothing$ 330 mm / 13"
CRCW1206-HP e3	EA = ET1 EB = ET5 EC = ET6	5000 10 000 20 000			4 mm	$\varnothing$ 180 mm / 7" $\varnothing$ 285 mm / 11.25" $\varnothing$ 330 mm / 13"
CRCW1210-HP e3	EA = ET1 EB = ET5 EC = ET6	5000 10 000 20 000			4 mm	$\varnothing$ 180 mm / 7" $\varnothing$ 285 mm / 11.25" $\varnothing$ 330 mm / 13"
CRCW1218-HP e3	EK = ET9 EF = E02	4000 4000			4 mm	$\varnothing$ 180 mm / 7"
CRCW2010-HP e3	EJ = E08 EG = E67	16 000 2000			4 mm	$\varnothing$ 330 mm / 13"
CRCW2512-HP e3	EH = E82	4000			8 mm	$\varnothing$ 180 mm / 7"
					4 mm	$\varnothing$ 180 mm / 7"

Revision: 14-Nov-2019

2


For technical questions, contact: thickfilmchip@vishay.com

Document Number: 20043

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000


FUNCTIONAL PERFORMANCE

Single Pulse

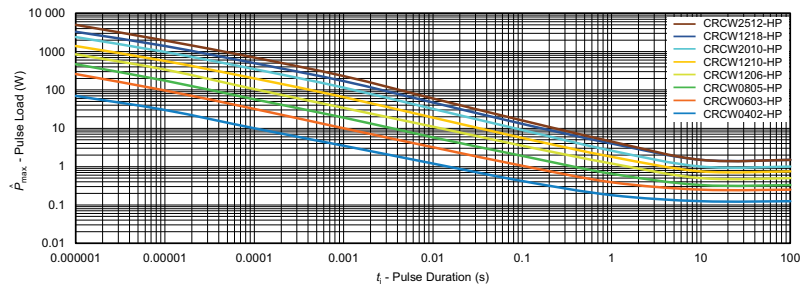


Maximum pulse load, single pulse; applicable if $\bar{P} \rightarrow 0$ and $n < 1000$ and $\dot{U} \leq \dot{U}_{max}$; for permissible resistance change equivalent to 8000 h operation

Continuous Pulse

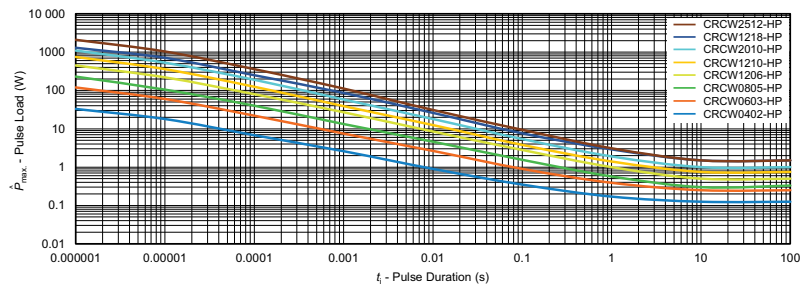


Maximum pulse load, continuous pulses; applicable if $\bar{P} \leq P(\theta_{amb})$ and $\dot{U} \leq \dot{U}_{max}$; for permissible resistance change equivalent to 8000 h operation

Pulse Voltage

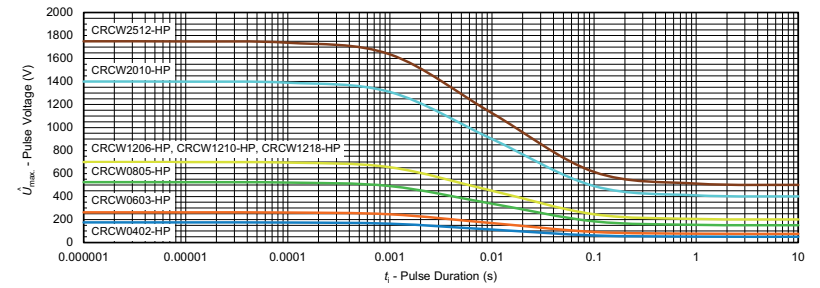

Maximum pulse voltage, single and continuous pulses; applicable if $\hat{P} \leq \hat{P}_{max}$; for permissible resistance change equivalent to 8000 h operation

Derating

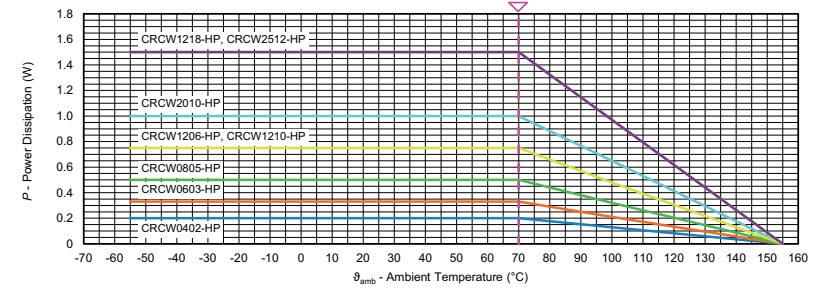

**TESTS AND REQUIREMENTS**

All executed tests are carried out in accordance with the following specifications:

EN 60115-1, generic specification

EN 60115-8 (successor of EN 140400), sectional specification

EN 140401-802, detail specification

IEC 60068-2-xx, test methods

The parameters stated in the Test Procedures and Requirements table are based on the required tests and permitted limits of EN 140401-802. The table presents only the most important tests, for the full test schedule refer to the documents listed above. However, some additional tests and a number of improvements against those minimum requirements have been included.

The testing also covers most of the requirements specified by EIA/IS-703 and JIS-C-5201-1.

The tests are carried out under standard atmospheric conditions in accordance with IEC 60068-1, 4.3, whereupon the following values are applied:

Temperature: 15 °C to 35 °C

Relative humidity: 25 % to 75 %

Air pressure: 86 kPa to 106 kPa (860 mbar to 1060 mbar).

A climatic category LCT / UCT / 56 is applied, defined by the lower category temperature (LCT), the upper category temperature (UCT), and the duration of exposure in the damp heat, steady state test (56 days).

The components are mounted for testing on boards in accordance with EN 60115-8, 2.4.2 unless otherwise specified.

TEST PROCEDURES AND REQUIREMENTS				
EN 60115-1 CLAUSE	IEC 60068-2 (1) TEST METHOD	TEST	PROCEDURE	REQUIREMENTS PERMISSIBLE CHANGE (ΔR)
			Stability for product types:	STABILITY CLASS 2 OR BETTER
			CRCW-HP e3	1 Ω to 1 MΩ
4.5	-	Resistance	-	± 0.5 %; ± 1 %; ± 5 %
4.8	-	Temperature coefficient	(20 / -55 / 20) °C and (20 / 155 / 20) °C	± 100 ppm/K; ± 200 ppm/K
4.25.1	-	Endurance at 70 °C	$U = \sqrt{P_{70} \times R}$ or $U = U_{max.}$; whichever is the less severe; 1.5 h on; 0.5 h off 70 °C; 1000 h 70 °C; 8000 h	± (2 % R + 0.1 Ω) ± (4 % R + 0.1 Ω)
4.25.3	-	Endurance at upper category temperature	155 °C; 1000 h	± (2 % R + 0.1 Ω)
4.24	78 (Cab)	Damp heat, steady state	(40 ± 2) °C; 56 days; (93 ± 3) % RH;	± (1 % R + 0.05 Ω)
4.37	67 (Cy)	Damp heat, steady state, accelerated	(85 ± 2) °C; (85 ± 5) % RH; $U = \sqrt{0.1 \times P_{85} \times R} \leq 100 \text{ V};$ 1000 h	± (2 % R + 0.1 Ω)
4.23	-	Climatic sequence:	-	
4.23.2	2 (Bb)	dry heat	125 °C; 16 h	
4.23.3	30 (Db)	damp heat, cyclic	55 °C; 24 h; ≥ 90 % RH; 1 cycle	
4.23.4	1 (Ab)	cold	-55 °C; 2 h	± (2 % R + 0.1 Ω)
4.23.5	13 (M)	low air pressure	8.5 kPa; 2 h; (25 ± 10) °C	
4.23.6	30 (Db)	damp heat, cyclic	55 °C; 24 h; ≥ 90 % RH; 5 cycles	
4.23.7	-	DC load	$U = \sqrt{P_{70} \times R} \leq U_{max.}$; 1 min	
-	1 (Aa)	Cold	-55 °C; 2 h	± (0.5 % R + 0.05 Ω)




TEST PROCEDURES AND REQUIREMENTS				
EN 60115-1 CLAUSE	IEC 60068-2 (1) TEST METHOD	TEST	PROCEDURE	REQUIREMENTS PERMISSIBLE CHANGE (ΔR)
			Stability for product types:	STABILITY CLASS 2 OR BETTER
			CRCW-HP e3	1 Ω to 1 MΩ
4.19	14 (Na)	Rapid change of temperature	30 min at -55 °C and 30 min at 125 °C; 1000 cycles	± (1 % R + 0.05 Ω) no visible damage
4.13	-	Short time overload	$U = 2.5 \times \sqrt{P_{70} \times R} \leq 2 \times U_{max.}$; whichever is the less severe; 5 s	± (2 % R + 0.05 Ω)
4.27	-	Single pulse high voltage overload	Severity no. 4: $U = 10 \times \sqrt{P_{70} \times R}$ or $U = 2 \times U_{max.}$; whichever is the less severe; 10 pulses 10 μs/700 μs	± (1 % R + 0.05 Ω) no visible damage
4.39	-	Periodic electric overload	$U = \sqrt{15 \times P_{70} \times R}$ or $U = 2 \times U_{max.}$; whichever is the less severe; 0.1 s on; 2.5 s off; 1000 cycles	± (1 % R + 0.05 Ω) no visible damage
4.38	-	Electrostatic discharge (human body model)	IEC 61340-3-1 (1); 3 pos. + 3 neg. discharges; ESD voltage acc. to the size	± (1 % R + 0.05 Ω)
4.22	6 (Fc)	Vibration	Endurance by sweeping; 10 Hz to 2000 Hz; no resonance; amplitude ≤ 1.5 mm or ≤ 200 m/s ² ; 7.5 h	± (0.5 % R + 0.05 Ω) no visible damage
4.17	58 (Td)	Solderability	Solder bath method; Sn60Pb40 non-activated flux; (235 ± 5) °C; (2 ± 0.2) s Solder bath method; Sn96.5Ag3Cu0.5 non-activated flux; (245 ± 5) °C; (3 ± 0.3) s	Good tinning (≥ 95 % covered) no visible damage
4.18	58 (Td)	Resistance to soldering heat	Solder bath method (260 ± 5) °C; (10 ± 1) s	± (0.5 % R + 0.05 Ω)
4.29	45 (XA)	Component solvent resistance	Isopropyl alcohol; +50 °C; method 2	No visible damage
4.32	21 (Uu ₃)	Shear (adhesion)	CRCW0402-HP and CRCW0603-HP: 9 N CRCW0805-HP to CRCW2512-HP: 45 N	No visible damage
4.33	21 (Uu ₁)	Substrate bending	Depth 2 mm; 3 times	± (0.25 % R + 0.05 Ω) no visible damage, no open circuit in bent position
4.7	-	Voltage proof	$U = 1.4 \times U_{ins.}$; 60 s	No flashover or breakdown
4.35	-	Flammability, needle flame test	IEC 60695-11-5 (1); 10 s	No burning after 30 s

Note

(1) The quoted IEC standards are also released as EN standards with the same number and identical contents


DIMENSIONS



DIMENSIONS AND MASS

TYPE / SIZE	L (mm)	W (mm)	H (mm)	T1 (mm)	T2 (mm)	MASS (mg)
CRCW0402-HP e3	1.0 ± 0.05	0.5 ± 0.05	0.3 ± 0.10	0.25 ± 0.10	0.2 ± 0.10	0.65
CRCW0603-HP e3	1.6 ± 0.10	0.85 ± 0.10	0.45 ± 0.10	0.3 ± 0.20	0.3 ± 0.20	2
CRCW0805-HP e3	2.0 ± 0.15	1.25 ± 0.15	0.5 ± 0.10	0.4 ± 0.20	0.35 ± 0.20	5.5
CRCW1206-HP e3	3.1 ± 0.20	1.6 ± 0.15	0.5 ± 0.15	0.5 ± 0.20	0.45 ± 0.20	10
CRCW1210-HP e3	3.2 ± 0.20	2.5 ± 0.20	0.6 ± 0.10	0.45 ± 0.20	0.4 ± 0.20	18
CRCW1218-HP e3	3.1 ± 0.20	4.6 ± 0.20	0.6 ± 0.10	0.45 ± 0.20	0.4 ± 0.20	31
CRCW2010-HP e3	5.0 ± 0.15	2.5 ± 0.15	0.6 ± 0.10	0.6 ± 0.20	0.6 ± 0.20	25.5
CRCW2512-HP e3	6.3 ± 0.20	3.15 ± 0.15	0.6 ± 0.10	0.6 ± 0.20	0.6 ± 0.20	42

SOLDER PAD DIMENSIONS



RECOMMENDED SOLDER PAD DIMENSIONS

TYPE / SIZE	WAVE SOLDERING				REFLOW SOLDERING			
	G (mm)	Y (mm)	X (mm)	Z (mm)	G (mm)	Y (mm)	X (mm)	Z (mm)
CRCW0402-HP e3	-	-	-	-	0.45	0.6	0.6	1.65
CRCW0603-HP e3	0.65	1.10	1.25	2.85	0.75	0.75	1.00	2.25
CRCW0805-HP e3	0.90	1.30	1.60	3.50	1.00	0.95	1.45	2.90
CRCW1206-HP e3	1.40	1.40	1.95	4.20	1.50	1.05	1.8	3.60
CRCW1210-HP e3	1.80	1.45	2.95	4.70	1.70	1.10	2.80	3.90
CRCW1218-HP e3	1.60	1.50	5.10	4.60	1.70	1.10	4.90	3.90
CRCW2010-HP e3	3.60	1.65	2.85	6.90	3.70	1.20	2.70	6.10
CRCW2512-HP e3	4.90	1.60	3.50	8.10	5.00	1.25	3.35	7.50

Notes

- The given solder pad dimensions reflect the considerations for board design and assembly as outlined e.g in standards IEC 61188-5-x⁽¹⁾ or in publication IPC-7351.
- Still, the given solder pad dimensions will be found adequate for most general applications

⁽¹⁾ The quoted IEC standards are also released as EN standards with the same number and identical contents

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Vishay:

CRCW12062K00FKEAHP	CRCW120610K0FKEAHP	CRCW201010R0FKEFHP	CRCW1206100KFKEAHP
CRCW120615K0FKEAHP	CRCW12061R00JNEAHP	CRCW120610R0FKEAHP	CRCW12061K00FKEAHP
CRCW04020000Z0EDHP	CRCW06030000Z0EAHP	CRCW12060000Z0EAHP	CRCW08050000Z0EAHP
CRCW0603100KFKEAHP	CRCW121012R0JNEAHP	CRCW1210510RJNEAHP	CRCW1210240RJNEAHP
CRCW12103K30FKEAHP	CRCW1210750RFKEAHP	CRCW1210150RFKEAHP	CRCW04021K00FKEDHP
CRCW040210K0FKEDHP	CRCW060310K0FKEAHP	CRCW06031K00FKEAHP	CRCW08051K00FKEAHP
CRCW080510K0FKEAHP	CRCW251210R0FKEGHP	CRCW2512100RFKEGHP	CRCW201010K0FKEFHP
CRCW2010100RFKEFHP	CRCW20101K00FKEFHP	CRCW25121K00FKEGHP	CRCW080520K0FKEAHP
CRCW20102K21FKEFHP	CRCW08051R00FKEAHP	CRCW080515R0FKEAHP	CRCW12061R00FKEAHP
CRCW0402100KFKEAHP	CRCW0402100KJNEDHP	CRCW0402100RFKEAHP	CRCW0402100RJNEDHP
CRCW040210K0JNEDHP	CRCW040210R0FKEDHP	CRCW040210R0JNEDHP	CRCW040215K0FKEDHP
CRCW04021K00JNEDHP	CRCW04021K50FKEDHP	CRCW04021M00FKEDHP	CRCW04021M00JNEDHP
CRCW04021R00FKEDHP	CRCW04021R00JNEDHP	CRCW040220K0FKEDHP	CRCW040220KJNEDHP
CRCW040220RJNEDHP	CRCW040220K0JNEDHP	CRCW040220R0FKEDHP	CRCW040220RJNEDHP
CRCW040222R1FKEDHP	CRCW04022K00FKEDHP	CRCW04022K20JNEDHP	CRCW04022R20JNEDHP
CRCW040233R0FKEDHP	CRCW040233R2FKEDHP	CRCW0402470KJNEDHP	CRCW0402470RJNEDHP
CRCW040247K0FKEDHP	CRCW040247K0JNEDHP	CRCW040247R0JNEDHP	CRCW0402499RFKEAHP
CRCW040249K9FKEDHP	CRCW040249R9FKEDHP	CRCW04024K70FKEDHP	CRCW04024K70JNEDHP
CRCW04024K75FKEDHP	CRCW04024K99FKEDHP	CRCW04024R70JNEDHP	CRCW040275R0FKEDHP
CRCW0603100KJNEAHP	CRCW0603100RFKEAHP	CRCW0603100RJNEAHP	CRCW060310K0JNEAHP
CRCW060310R0FKEAHP	CRCW060310R0JNEAHP	CRCW060315K0FKEAHP	CRCW06031K00JNEAHP
CRCW06031K50FKEAHP	CRCW06031M00FKEAHP	CRCW06031M00JNEAHP	CRCW06031R00FKEAHP
CRCW06031R00JNEAHP	CRCW060320K0FKEAHP	CRCW0603220KJNEAHP	CRCW0603220RJNEAHP
CRCW060322K0JNEAHP	CRCW060322R0JNEAHP	CRCW06032K00FKEAHP	CRCW06032K20JNEAHP
CRCW06032R20JNEAHP	CRCW060330K9FKEAHP	CRCW060333R0FKEAHP	CRCW060333R2FKEAHP