
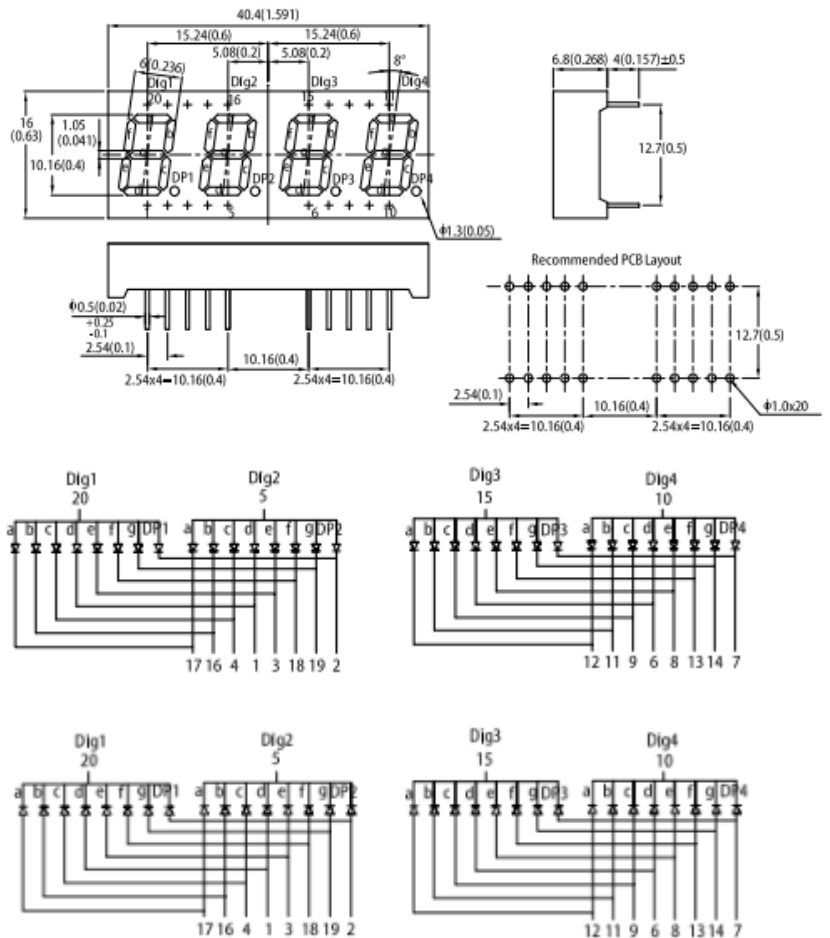


PACKAGE DIMENSIONS

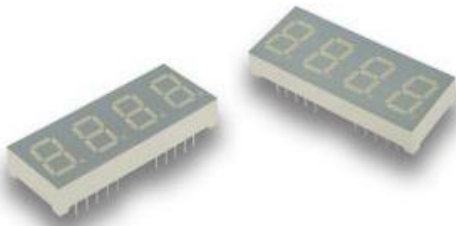

CA04-41EWA
CA04-41GWA
CA04-41YWA
CA04-41SRWA
CA04-41SURKWA

CC04-41EWA
CC04-41GWA
CC04-41YWA
CC04-41SRWA
CC04-41SURKWA

Part No.	Dice	Iv (ucd) @ 10 mA		Description
		Min.	Typ.	
CA04-41EWA	HIGH EFFICIENCY RED (GaAsP/GaP)	1900	4700	Common Anode.Rt.Hand Decimal
CC04-41EWA				Common Cathode.Rt.Hand Decimal
CA04-41GWA	GREEN (GaP)	1900	6400	Common Anode.Rt.Hand Decimal
CC04-41GWA				Common Cathode.Rt.Hand Decimal
CA04-41YWA	YELLOW (GaAsP/GaP)	1900	4700	Common Anode.Rt.Hand Decimal
CC04-41YWA				Common Cathode.Rt.Hand Decimal
CA04-41SRWA	SUPER BRIGHT RED (GaAlAs)	8000	18000	Common Anode.Rt.Hand Decimal
CC04-41SRWA				Common Cathode.Rt.Hand Decimal

Photo	Part Number	Description	Color	Wavelength	Min.	Typ.	Unit	Viewing Angle
	CA04-41SURKWA	.4" 4-DIGIT RED LED DISPLAY	■	630nm	9000	22000	ucd @10mA	N/A
	CC04-41SURKWA	.4" 4-DIGIT RED LED DISPLAY	■	630nm	9000	22000	ucd @10mA	N/A