
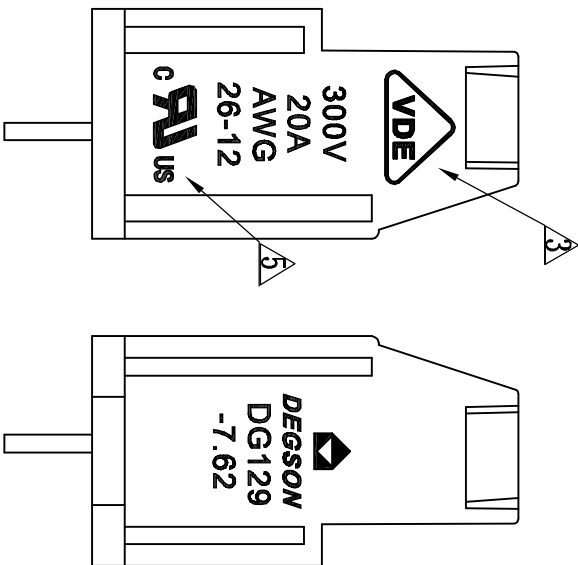
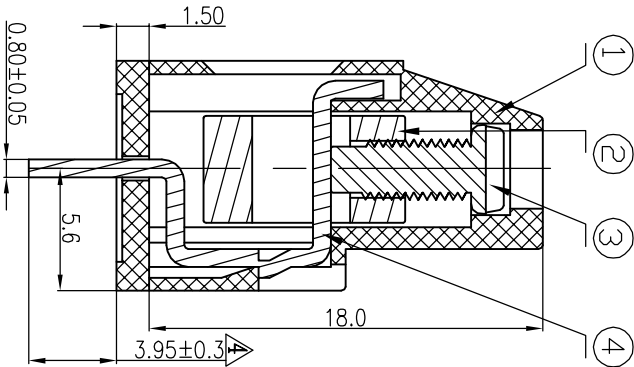


- Notes:
1. Pitch: 7.62mm
 2. Rated voltage/current: UL 300V/20A
VDE 450V/20A
 3. Operation temperatures: -40℃~+105℃
 4. Withstanding Voltage: AC2000V/1Min
 5. Insulation Resistance: 5000MΩ/DC1000V
 6. Wire Range: 26-12AWG, 2.5mm²
 7. Max. Torque Value: M3, 5, 10kgf.cm
 8. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm	
over	over	over	over
6	10	30	60
to	to	to	to
10	24	30	100
6		60	150

REVISION RECORD			
REV	ECO	DESCRIPTION	DATE
Δ		Drawing Review	03/10/07
Δ		增加VDE刻字	01/12/07
Δ		出圈由3.95改为3.95±0.30	02/03/07
Δ		UL标准中文输入	08/09/07
Δ		品名、料号增加标示“00”	12/10/07

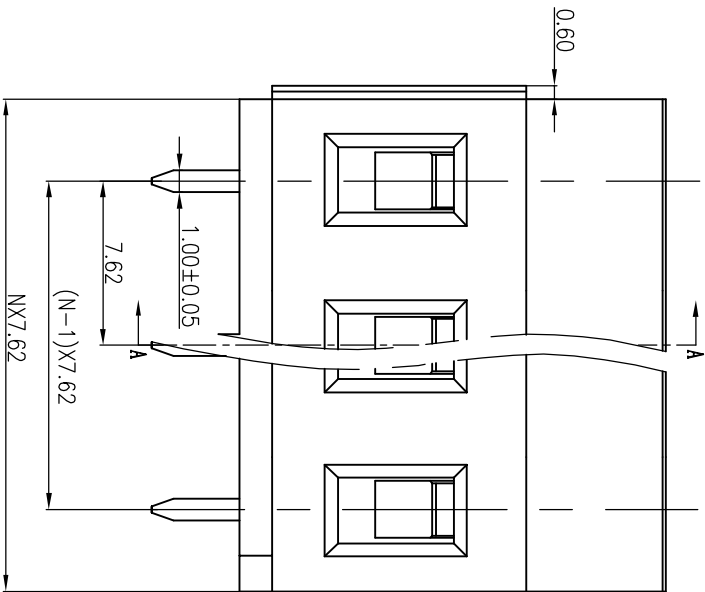

SECTION A-A

ITEM	1	DG129-7.62-Housing	40430TXXA(H)	1	PA66	UL94V-0
NAME OF PART						
NO. OF PART						
Q'TY						
MATERIAL						
NOTES						
DETACHED LISTS						
MM (INCH)	MM	DATE	DATE	DATE	DATE	DATE
0 ±	0 ±	CHKD	MFD	APVL		
100 ±	100 ±					
1000 ±	1000 ±					
ANGLES ± 1°						
THIRD ANGLE PROJECTION						
SCALE: 1:1						
FINISH:						
NAME						
DG129-7.62-XXP-1Y-00A(H)						
DRAWING NO. DG129-7.62-E01						
/PART NO.						
DD NOT SCALE DRAWING						
SHEET 1						
OF 1						