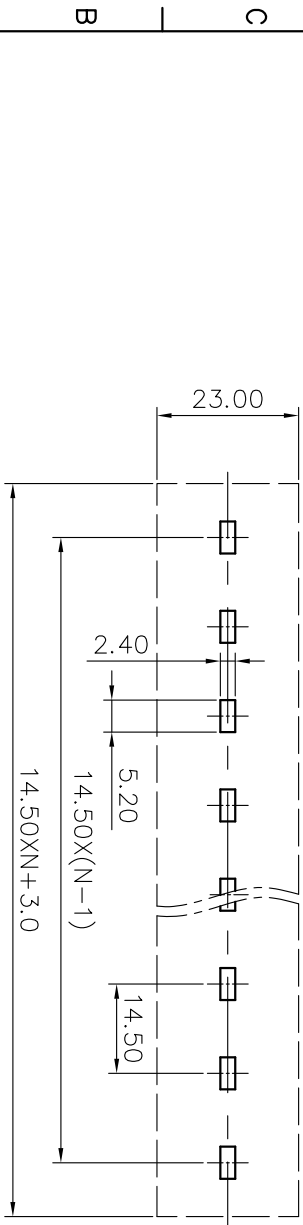
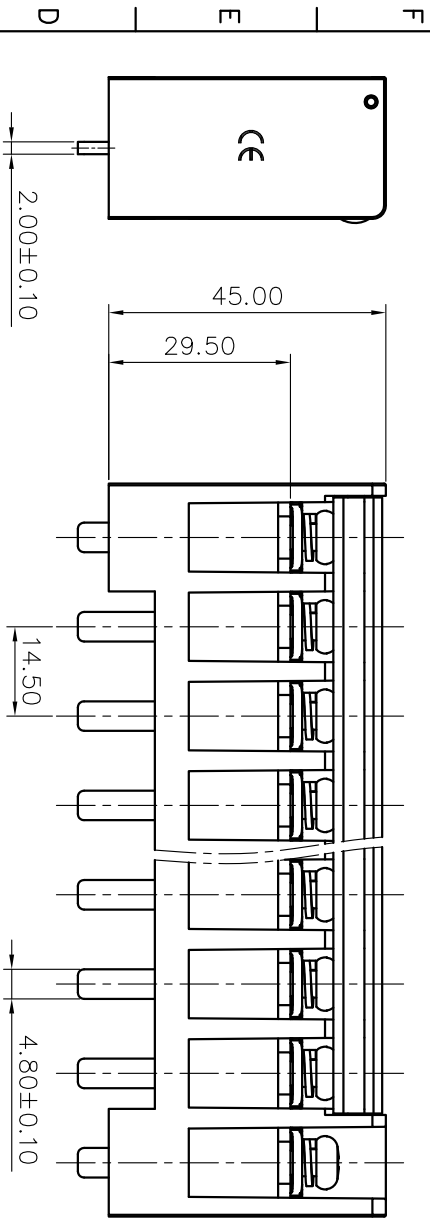
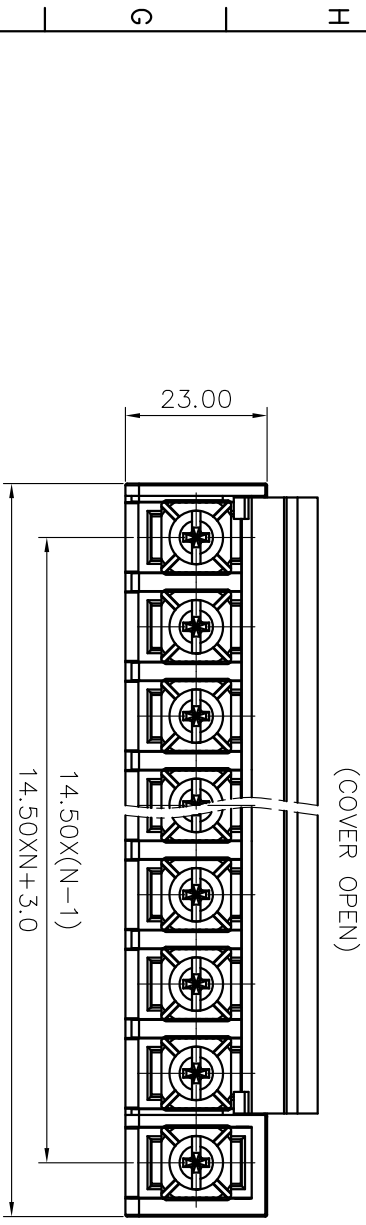


6. RoHS Compliance

Pitch range in mm	Nominal dimension range in mm	Over	Over	Over	Over	Over	Over	Over	Over
6	10	30	60	100	150	200	250	300	350
TO	TO	TO	TO	TO	TO	TO	TO	TO	TO
6	10	24	30	60	100	150	200	250	300
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2.0	±2.5

- NOTES1:
- 1. Rated voltage/current : 600V / 57A
 - 2. Torque value : M5 , 20.0lb.in
 - 3. Wire range : 22~6AWG
- NOTES2:
- 1. Dimension shall be interpreted per ASME Y14.5-2009
 - 2. Pitch : 14.50mm, Poles : N=03~14P
 - 3. Withstanding voltage : AC2200V/1min
 - 4. Operating temperature : -30°C~+120°C
 - 5. Undimensioned tolerances:

DETACHED LISTS			
PART NO.:	/	 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
APPD:	/	NAME: DG1450H-B-XXP-1Y-20A(H)	
CHKD:	/		
DFT:	/	TITLE: CUSTOMER DRAWING	REV DO
 THIRD ANGLE PROJECTION		DRAWING NO.:	SHEET 1/1
		 DO NOT SCALE DRAWING SCALE 1:1	