

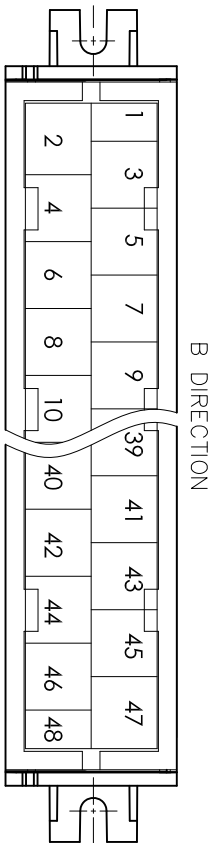


REVISION RECORD			
REV	ECN	DESCRIPTION	DATE



(W/O COVER)

DG24-2-A - XXP - 1Y - 00A (H)
(RoHS)
00A-(Standard)
(Series No.) (Poles) (Single Pitch) (Color): 1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

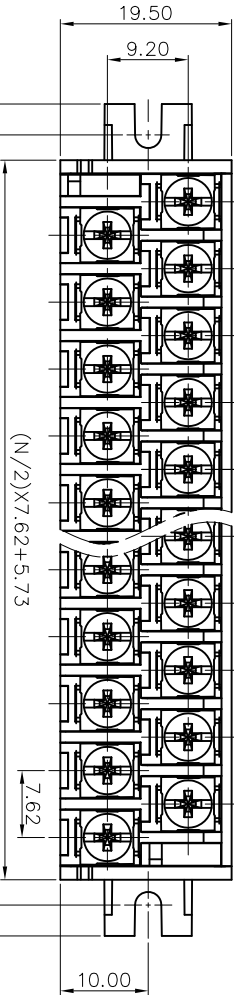

NOTES:

UL Standard





- 1.Rated Voltage/Current : 300V / 15A
- 2.Torque Value : M3.0 , 4.43lb.in
- 3.Wire Range : 14~22AWG

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 7.62mm, Poles : N=2X(4~24)P
- 3.Withstanding Voltage : AC1600V/1Min.
- 4.Operating temperature : -40C~+105C
- 5.Undimensioned Tolerances:

Pitch range in mm	Nominal dimension range in mm	Over 6 TO 10	Over 10 TO 24	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150 TO 180
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30
±2°	±2°	±2°	±2°	±2°	±2°	±2°	±2°

6.RoHS Compliance

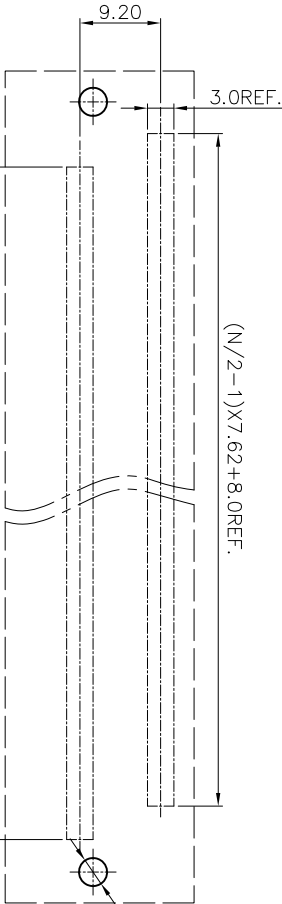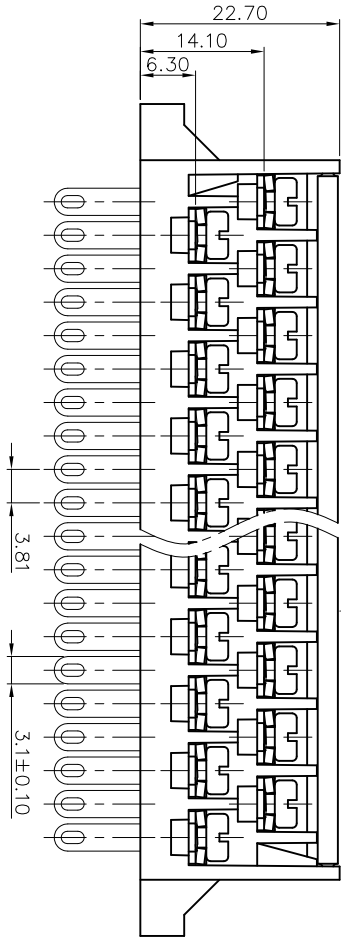

(N/2-1)X7.62+8.0REF.

DETACHED LISTS			
PART NO.:	/	NAME:	NINGBO DEGSON ELECTRICAL CO., LTD
APPD:	/	NAME:	DG24-2-A-XXP-1Y-00A(H)
CHKD:	/	TITLE:	CUSTOMER DRAWING
DFT:	/	DRAWING NO.:	REV
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	SCALE
		SCALE	1:1