



DIN 41612 Series

Electrical:
Contact Resistance: 30 mΩ Max. Insulator
Insulation Resistance: 1000 MΩ Min. At 500 VDC
Withstand Voltage: 1000 VAC for 1 minute
Current Rating: 2 AMP
Voltage Rating: 250 VAC
Operating Temperature: -55 °C ~ +105 °C

Material:
Insulator: Glass-filled thermoplastic PBT UL94V-0
Contacts: Male-Brass / Female-Phosphor Bronze
Plating: full gold or selected gold in mating area.

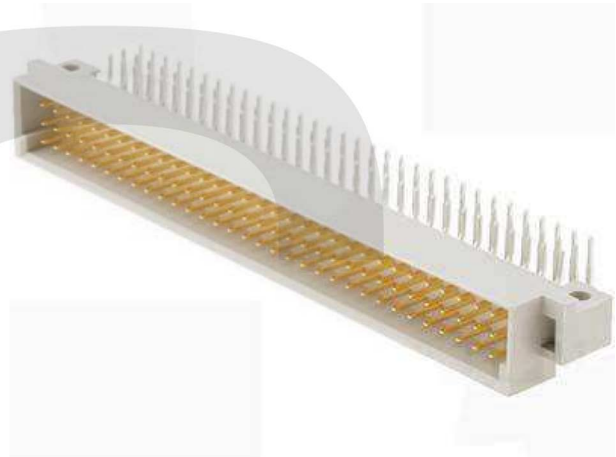

Pitch	Position	Rows with Contacts	Contact Arrange	Part Number
2.54mm	96	a b c		3396
	64	a - c		3264
5.08mm	48	a b c		3348
	32	a - c		3232

ORDER INFORMATION

Product No.: KLS1-D3-3396-MR

Pos. No. _____ Tail Style: S -4 0mm Straight pin

3X32Pin 3 row Long Type _____ W1-13mm Straight pin

Part Number: 3396 / 3264 / 3348 / 3232

- Tail Style: S -4.0mm Straight pin

W1-13mm Straight pin

- Contact Type: M=Male Plug

F=Female Receptacle

Connector

DIN 41612 Series


KLS1-D3 3X32Pin 3 row Long C Type

Electrical:

Contact Resistance: 30 mΩ Max. Insulator
Insulation Resistance: 1000 MΩ Min. At 500 VDC
Withstand Voltage: 1000 VAC for 1 minute
Current Rating: 2 AMP
Voltage Rating: 250 VAC
Operating Temperature: -55 °C ~ +105 °C

Material:

Insulator: Glass-filled thermoplastic PBT UL94V-0
Contacts: Male-Brass / Female-Phosphor Bronze
Plating: full gold or selected gold in mating area.

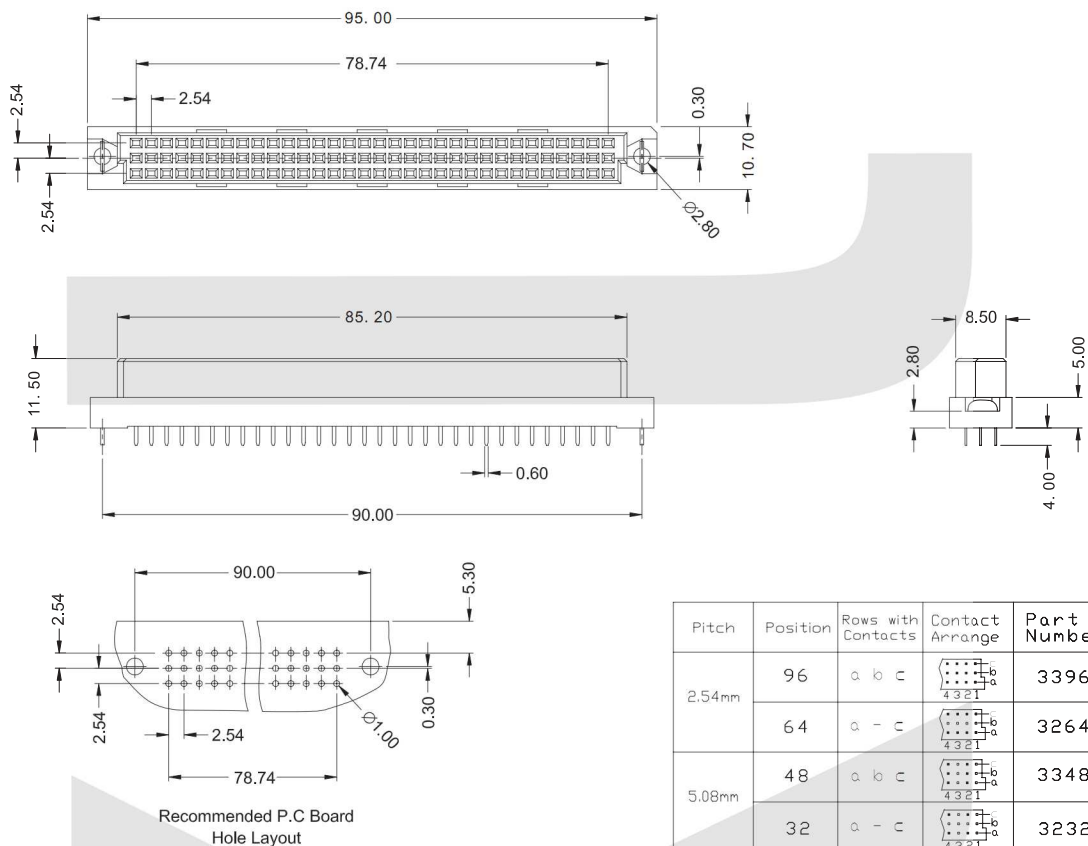

ORDER INFORMATION

Product No.: KLS1-D3-3396-F S

Pos. No.

3X32Pin 3 row Long Type

Part Number: 3396 / 3264 / 3348 / 3232

Tail Style: S -4.0mm Straight pin

W1-13mm Straight pin

R -Right pin

Contact Type: M=Male Plug

F=Female Receptacle

Connector

DIN 41612 Series


KLS1-D3 3X32Pin 3 row Long C Type

Electrical:

Contact Resistance: 30 mΩ Max. Insulator
Insulation Resistance: 1000 MΩ Min. At 500 VDC
Withstand Voltage: 1000 VAC for 1 minute
Current Rating: 2 AMP
Voltage Rating: 250 VAC
Operating Temperature: -55 °C ~ +105 °C

Material:

Insulator: Glass-filled thermoplastic PBT UL94V-0
Contacts: Male-Brass / Female-Phosphor Bronze
Plating: full gold or selected gold in mating area.

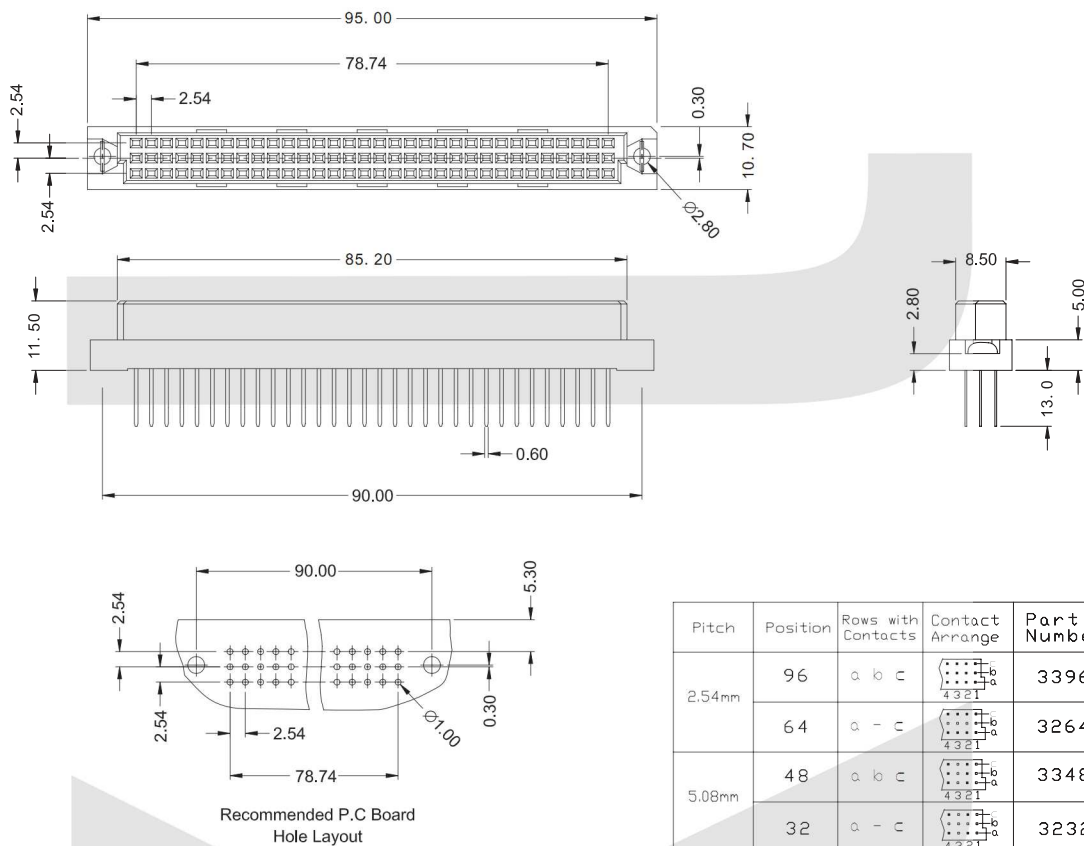

ORDER INFORMATION

Product No.: KLS1-D3-3396-F W1

Pos. No.

3X32Pin 3 row Long Type

Part Number: 3396 / 3264 / 3348 / 3232

Tail Style: S -4.0mm Straight pin

W1-13mm Straight pin

R -Right pin

Contact Type: M=Male Plug

F=Female Receptacle

Connector

DIN 41612 Series




KLS1-D3 3X32Pin 3 row Long R Type

Electrical:

Contact Resistance: 30 mΩ Max. Insulator
Insulation Resistance: 1000 MΩ Min. At 500 VDC
Withstand Voltage: 1000 VAC for 1 minute
Current Rating: 2 AMP
Voltage Rating: 250 VAC
Operating Temperature: -55 °C ~ +105 °C

Material:

Insulator: Glass-filled thermoplastic PBT UL94V-0
Contacts: Male-Brass / Female-Phosphor Bronze
Plating: full gold or selected gold in mating area.

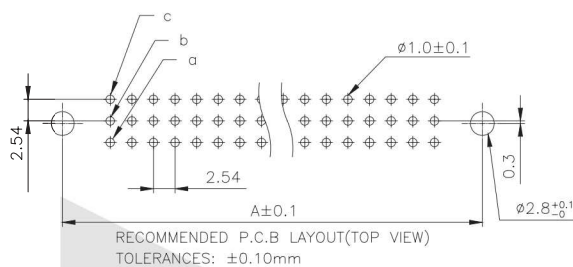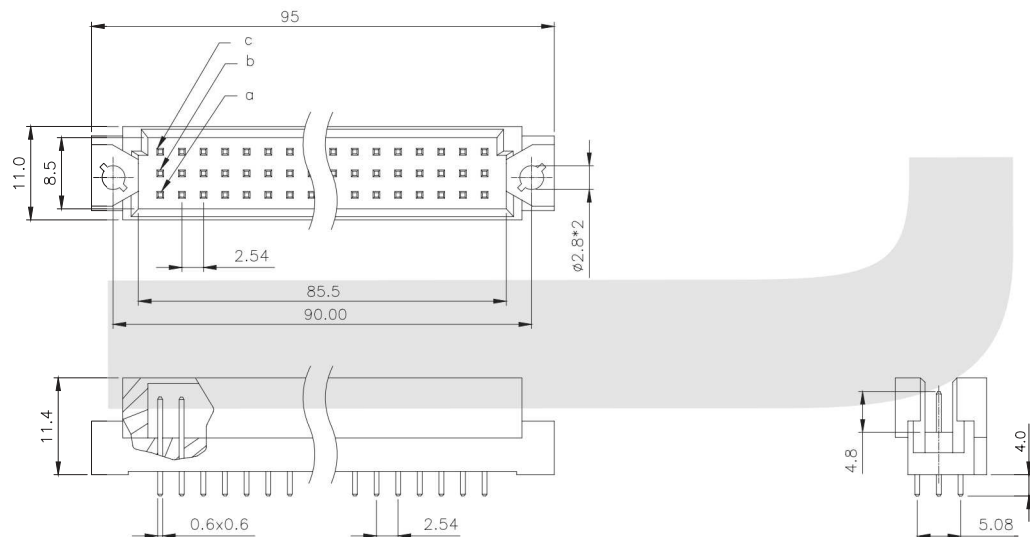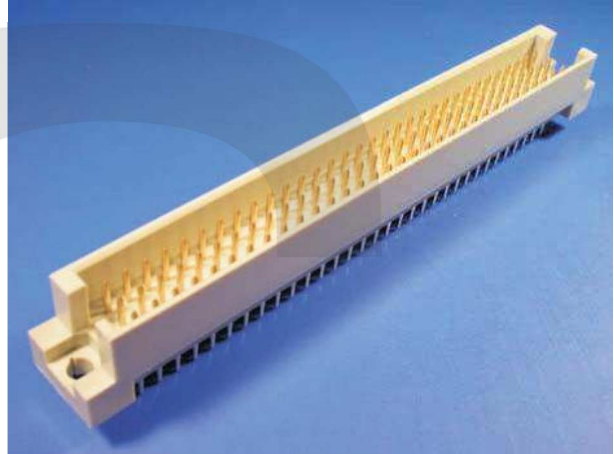

Pitch	Position	Rows with Contacts	Contact Arrange	Part Number
2.54mm	96	a b c		3396
	64	a - c		3264
5.08mm	48	a b c		3348
	32	a - c		3232

ORDER INFORMATION

Product No.: KLS1-D3-3396-MS

Pos. No.

3X32Pin 3 row Long Type

Part Number: 3396 / 3264 / 3348 / 3232

Tail Style: S -4.0mm Straight pin

W1-13mm Straight pin

R -Right pin

Contact Type: M=Male Plug

F=Female Receptacle

Connector

DIN 41612 Series






KLS1-D3 3X32Pin 3 row Long R Type

Electrical:

Contact Resistance: 30 mΩ Max. Insulator
Insulation Resistance: 1000 MΩ Min. At 500 VDC
Withstand Voltage: 1000 VAC for 1 minute
Current Rating: 2 AMP
Voltage Rating: 250 VAC
Operating Temperature: -55 °C ~ +105 °C

Material:

Insulator: Glass-filled thermoplastic PBT UL94V-0
Contacts: Male-Brass / Female-Phosphor Bronze
Plating: full gold or selected gold in mating area.

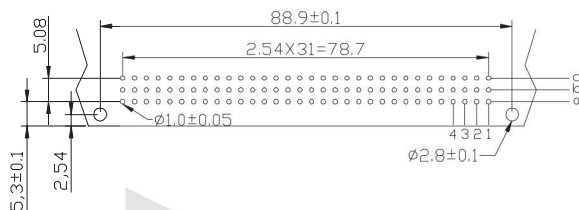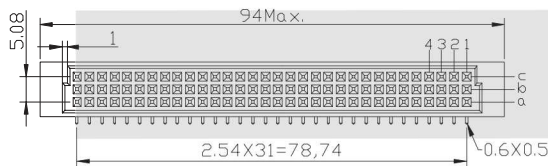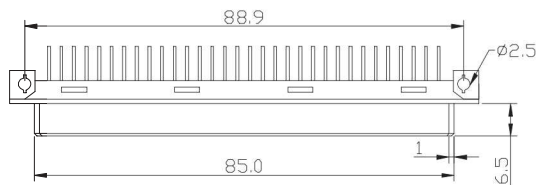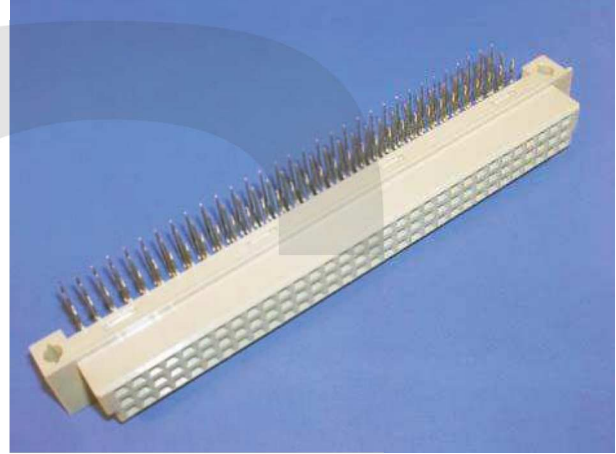

P.C. Board Layout

Pitch	Position	Rows with Contacts	Contact Arrange	Part Number
2.54mm	96	a b c		3396
	64	a - c		3264
5.08mm	48	a b c		3348
	32	a - c		3232

ORDER INFORMATION

Product No.: KLS1-D3-3396-F R

Pos. No.

3X32Pin 3 row Long Type

Part Number: 3396 / 3264 / 3348 / 3232

Tail Style: S -4.0mm Straight pin

W1-13mm Straight pin

R -Right pin

Contact Type: M=Male Plug

F=Female Receptacle





DIN 41612 Series

Electrical:

Contact Resistance: 30 mΩ Max. Insulator
Insulation Resistance: 1000 MΩ Min. At 500 VDC
Withstand Voltage: 1000 VAC for 1 minute
Current Rating: 2 AMP
Voltage Rating: 250 VAC
Operating Temperature: -55 °C ~ +105 °C

Material:

Insulator: Glass-filled thermoplastic PBT UL94V-0
Contacts: Male-Brass / Female-Phosphor Bronze
Plating: full gold or selected gold in mating area.

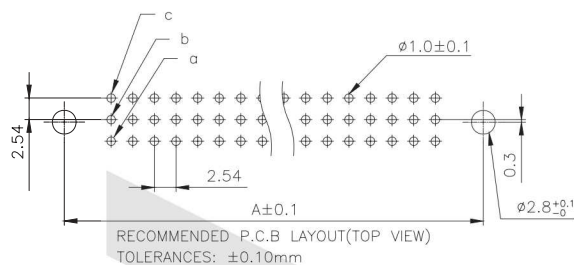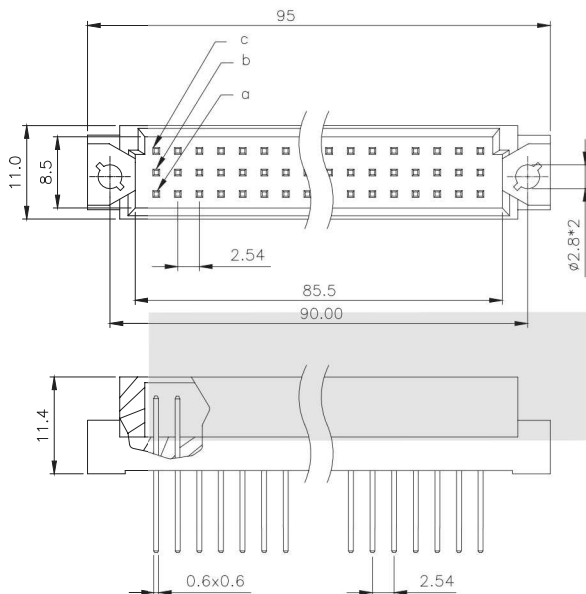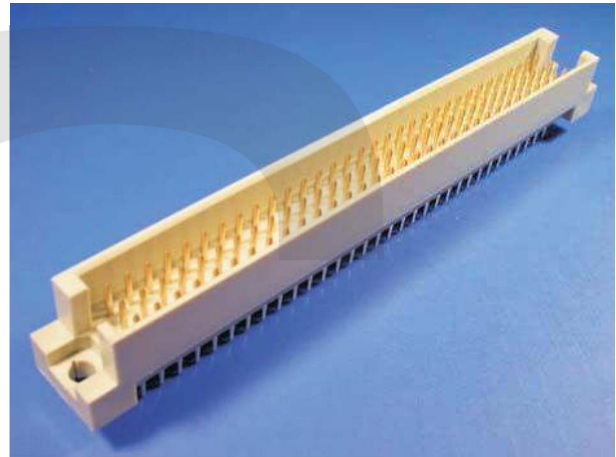

Pitch	Position	Rows with Contacts	Contact Arrange	Part Number
2.54mm	96	a b c		3396
	64	a - c		3264
5.08mm	48	a b c		3348
	32	a - c		3232

ORDER INFORMATION

Product No.: KLS1-D3-3396-M W1

Pos. No.			
----------	--	--	--

3X32Pin 3 row Long Type _____

Part Number: 3396 / 3264 / 3348 / 3232 _____

— Tail Style:S -4.0mm Straight pin

W1-13mm Straight pin

R -Right pin
Type: M=Male P

F=Female Receptacle