


BL For Ballast, High Ripple Current, Long Life Series


- High ripple current
- Operating temperature range of -25 ~ 105°C
- For ballast and adapter, power supply
- Complied to the RoHS directive



Item	Characteristics						
Operating temperature range	-25 ~ +105°C						
Leakage current max.	I = 0.02CV + 25μA (after 5 minutes)						
Capacitance tolerance	±20% at 120Hz, 20°C						
Dissipation factor max. (at 120Hz, 20°C)	WV	160	200	250	350	400	450
	tanδ	0.15	0.15	0.15	0.20	0.20	0.20
Low temperature characteristics (Impedance ratio at 120Hz)	WV	160	200	250	350	400	450
	Z-25°C/Z+20°C	3	3	3	4	6	6
Load life	After an application of DC bias voltage plus the rated AC ripple current for 10000 hours at 105°C. The measurement shall meel the following limits.						
	Leakage current			Less than specified value			
	Capacitance change			Within ±20% of initial value			
	tanδ			Less than 200% of specified value			
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and tanδ are same as load life value. The measurement shall be performed after exposure for 24 hours at room temperature after application of DC rated voltage to the capacitors for 30 minutes.						

● DRAWING

Unit : mm

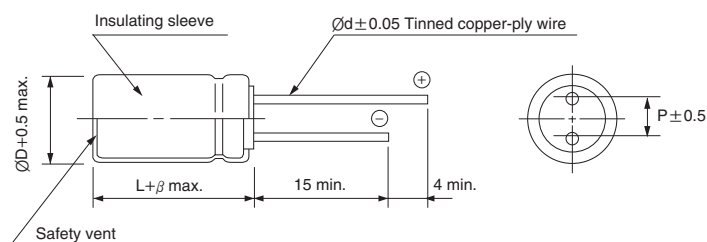

ØD	10	12.5	16	18
P	5.0	5.0	7.5	7.5
Ød	0.6	0.6	0.8	0.8
β	2.0			

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV	160		200		250		350		400		450	
µF	10	250	10	250	10	280	10	280	10	280	12.5	320
6.8							10 × 16	220	10 × 16	220	10 × 16	150
10	10 × 16	250	10 × 16	250	10 × 20	280	10 × 20	280	10 × 20	280	12.5 × 20	320
22	10 × 20	500	10 × 20	500	12.5 × 20	600	12.5 × 20	350	12.5 × 25	430	16 × 25	560
33	10 × 20	500	12.5 × 20	600	12.5 × 20	600	16 × 20	500	16 × 25	640	18 × 25	700
47	12.5 × 20	660	12.5 × 20	660	12.5 × 25	720	16 × 25	660	18 × 25	840	18 × 31.5	880
68	12.5 × 25	760	12.5 × 25	760	16 × 25	920	18 × 25	840				
100	16 × 25	1120	16 × 25	1120	18 × 25	1200						
150	18 × 25	1360	18 × 25	1360								

Ripple current (mA rms) at 105°C, 100kHz
Case size ØD × L (mm)

● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

Frequency(Hz)	60	120	300	1k	10k	100k≤
Coefficient	0.35	0.5	0.6	0.8	0.9	1.0