
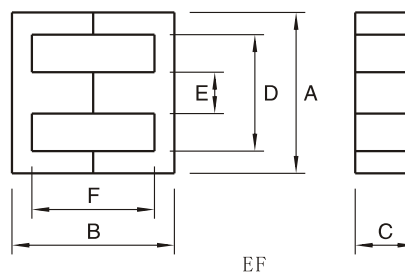


EF TYPE CORES



EF TYPE CORES
(MATERIALS): H6K , H8K , H10K , P1, P2, P3
Dimensions & Effective parameter

CORE TYPE	Dimensions (mm)						Parameter Effective					
	A	B	C	D (min)	E	F	C1 (mm ⁻¹)	Ae (mm ²)	Le (mm)	Ve (mm ³)	Al ± 25% (nH/N ²)	Weight (g)
EF12.6	12.7 ± 0.4	12.80 ± 0.4	3.60 ± 0.2	8.80	3.65 ± 0.15	9.30 ± 0.3	2.39	12.4	29.6	367	875 (p2)	28
EF16	16.1 ± 0.60	16.10 ± 0.4	4.50 ± 0.2	11.30	4.55 ± 0.15	11.80 ± 0.4	1.87	20.1	37.6	756	1100 (p2)	3.6
EF20	20.0 ± 0.50	19.80 ± 0.5	5.65 ± 0.3	14.1	5.70 ± 0.30	14.40 ± 0.5	1.34	33.5	44.9	1500	1350 (p2)	7.3
EF20/11	20.0 ± 0.4	20.0 ± 0.4	11.0 ⁺⁰ _{-0.5}	14.1	5.7 ± 0.3	14.4 ± 0.5	0.699	64.46	45.06	2904	2990 (P3)	13.9
EF25	25.05 ± 0.75	25.10 ± 0.5	7.20 ± 0.3	17.50	7.20 ± 0.25	17.80 ± 0.4	1.11	52.5	57.8	3020	1800 (p2)	16.0
EF25/11	25.05 ± 0.5	25.10 ± 0.5	10.75 ± 0.3	17.5	7.20 ± 0.3	17.80 ± 0.4	0.72	8.2	57.8	4695	3200 (P3)	24.4
EF32	32.0 ^{+0.9} _{-0.7}	32.8 ⁺⁰ _{-1.2}	9.5 ⁺⁰ _{-0.7}	22.7	9.5 ⁺⁰ _{-0.6}	22.4 ^{+0.6} ₋₀	0.89	83	74	6140	2300 (p2)	30.0
EF36	36.0 ^{+1.0} _{-0.7}	36.0 ⁺⁰ _{-0.5}	11.5 ⁺⁰ _{-0.5}	24.5 ^{+1.2} ₋₀	10.2 ⁺⁰ _{-0.5}	24.0 ^{+0.6} ₋₀	0.68	120	81	9670	3000 (p2)	50.0