

- Smaller case sized than HP series.
- Withstanding 2000 hours application of high ripple current at 105°C.




SPECIFICATION


Item	Characteristic															
Operation Temperature Range	-40 ~ +105°C															
Rated Working Voltage	16 ~ 500VDC															
Capacitance Tolerance (120Hz 20°C)	±20%(M)															
Leakage Current (20°C)	I ≤0.02CV or 3 (mA) *Whichever is smaller after 5 minutes I : Leakage Current(μA) C : Rated Capacitance(μF) V : Working Voltage(V)															
Surge Voltage (20°C)	W.V.	16	25	35	50	63	80	100	160	180	200	250	350	400	450	500
	S.V.	20	32	44	63	79	100	125	200	225	250	300	400	450	500	550
Dissipation Factor (tan δ) (120Hz 20°C)	Rated Voltage (V)		16	25	35	50		63		80		100		≥160		
	Capacitance		—	—	—	≤6,800	≥10,000	≤6,800	≥10,000	≤3,300	≥4,700	≤3,300	≥4,700	—		
	tan δ		0.50	0.40	0.35	0.30	0.35	0.25	0.35	0.20	0.25	0.20	0.25	0.15		
Low Temperature Stability	Impedance ratio at 120Hz															
	Rated Voltage (V)		16		25		35		50		63~100		160~250		350~500	
	-25°C / +20°C		6		6		6		4		3		4		6	
	-40°C / +20°C		15		15		10		8		6		—		—	
Load Life	After 2000 hours application of W.V. at +105°C, the capacitor shall meet the following limits.															
	Capacitance Change		≤±20% of initial value													
	Dissipation Factor		≤175% of initial specified value													
	Leakage current		≤initial specified value													
Shelf Life	At +105°C, no voltage application after 1000 hours, the capacitor shall meet the limits for load life characteristics. (With voltage treatment)															

TERMINAL TYPE


▲ P.C.B. TERMINAL (SNAP IN) SYMBOL: W($\phi 22 \sim 35$)

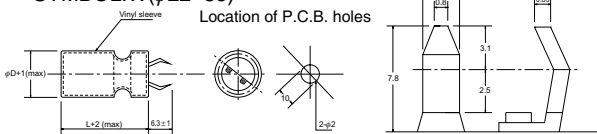



▲ P.C.B. TERMINAL SYMBOL: V($\phi 25 \sim 35$)

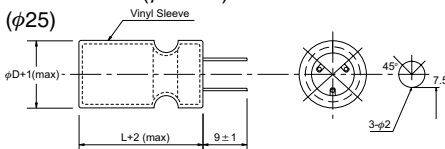

($\phi 35$) A.B. blank terminals

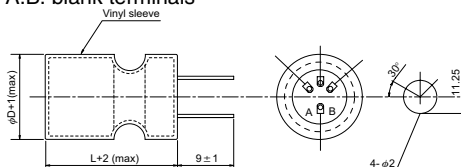

▲ LUG TERMINAL SYMBOL: G($\phi 22 \sim 35$)

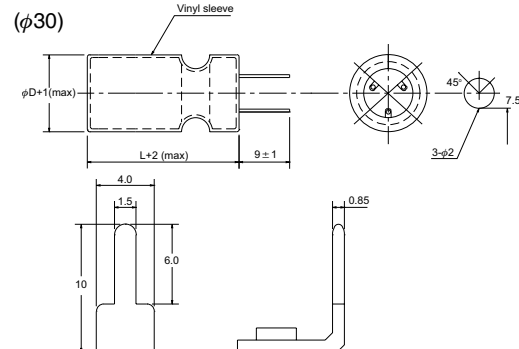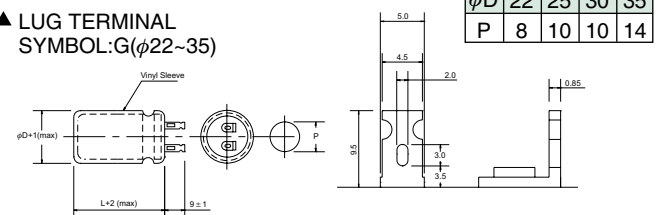

RIPPLE CURRENT COEFFICIENTS

Temperature(°C)	40	60	70	85	105
Multiplier	2.50	2.20	2.00	1.80	1.00

Frequency(Hz)	60	120	400	1k	10k
W.V.	Multiplier				
$\leq 100\text{V}$	0.80	1.00	1.10	1.20	1.20
$\geq 160\text{V}$	0.80	1.00	1.10	1.30	1.40

CASE SIZE & MAX RIPPLE CURRENT

Case size	: D x L	(mm)
Max ripple current	: A(rms)	105°C 120Hz

V(Code) μF ϕD Code		16 (1C)				25 (1E)				35 (1V)				50 (1H)			
		22	25	30	35	22	25	30	35	22	25	30	35	22	25	30	35
1500	152													25			
														1.05			
2200	222									25				30	25		
										1.17				1.31	1.25		
3300	332					25				30	25			35	30	25	
						1.34				1.43	1.36			1.58	1.52	1.50	
4700	472	25				30	25			35	30	25		45	35	30	25
		1.36				1.58	1.51			1.65	1.58	1.56		1.90	1.74	1.73	1.86
6800	682	35	30			35	30	25		50	40	30	25		50	35	30
		1.74	1.67			1.85	1.78	1.75		2.09	1.94	1.82	1.96		2.19	1.98	2.15
10000	103	45	35	25		45	35	30	25		50	35	30			45	40
		2.09	1.92	1.77		2.19	2.01	2.00	2.15		2.24	2.03	2.2			2.39	2.62
15000	153		45	35	30		45	35	30			50	40				50
			2.29	2.17	2.36		2.54	2.41	2.61			2.79	2.92				3.52
22000	223			45	35			45	40								
				2.86	2.97			3.24	3.55								
33000	333				50				50								L(mm)
					4.21				4.78								

[illegible]

● CASE SIZE & MAX RIPPLE CURRENT

Case size : D x L (mm)
Max ripple current : A(rms) 105°C 120Hz

μF	V(Code) Code	φD	180 (2M)				200 (2D)				250 (2E)			
			22	25	30	35	22	25	30	35	22	25	30	35
220	221						25				30	25		
							0.85				0.91	0.91		
270	271	25					25				35	25		
		0.80					0.94				1.07	1.01		
330	331	30	25				30	25			35	30	25	
		0.95	0.95				1.12	1.12			1.19	1.20	1.24	
390	391	30	25				35	25			40	35	25	
		1.03	1.04				1.31	1.22			1.37	1.39	1.35	
470	471	35	30	25			40	30	25		50	40	30	25
		1.21	1.22	1.27			1.52	1.45	1.50		1.66	1.61	1.59	1.63
560	561	40	30	25			45	35	30			45	35	25
		1.40	1.34	1.39			1.75	1.68	1.76			1.85	1.85	1.78
680	681	45	35	30	25		50	40	30	25		50	35	30
		1.63	1.57	1.64	1.68		2.02	1.96	1.94	1.98		2.14	2.04	2.10
820	821	50	40	30	25			45	35	30			45	35
		1.88	1.83	1.80	1.85			2.27	2.26	2.33			2.49	2.45
1000	102		45	35	30			50	40	30				40
			2.12	2.12	2.18			2.63	2.64	2.58				2.86
1200	122			40	30				45	35				45
				2.45	2.39				3.04	3.00				3.29
1500	152			50	35					45				50
				2.91	2.74					3.58				3.68
1800	182				40					50				L(mm)
					3.17					4.10				R.C.

μF	V(Code) Code	φD	350 (2V)				400 (2G)				450 (2W)				500 (2H)			
			22	25	30	35	22	25	30	35	22	25	30	35	22	25	30	35
47	470										25				25			
											0.39				0.27			
68	680						25				30	25			30	25		
							0.47				0.50	0.50			0.35	0.35		
82	820	25					30	25			35	30			35	30		
		0.43					0.56	0.56			0.59	0.60			0.41	0.41		
100	101	30	25				30	25			40	35	25		40	35	30	
		0.51	0.51				0.61	0.61			0.69	0.70	0.68		0.47	0.48	0.50	
120	121	30	25				35	30	25		45	35	30	25	50	40	35	25
		0.55	0.55				0.72	0.73	0.75		0.80	0.77	0.80	0.82	0.57	0.56	0.59	0.56
150	151	35	30	25			40	35	30			45	35	30		45	40	30
		0.66	0.67	0.69			0.85	0.86	0.90			0.96	0.96	0.99		0.66	0.69	0.68
180	181	40	35	30			45	40	30	25		50	35	30		50	40	35
		0.77	0.78	0.82			0.98	1.00	0.99	1.01		1.10	1.05	1.08		0.75	0.76	0.79
220	221	50	40	30	25			45	35	30			40	35			45	40
		0.94	0.91	0.90	0.92			1.17	1.16	1.20			1.22	1.27			0.88	0.92
270	271		45	35	30			50	40	30			50	40			50	45
			1.07	1.06	1.10			1.35	1.36	1.33			1.49	1.48			1.02	1.07
330	331		50	40	30				45	35				45				50
			1.23	1.24	1.21				1.58	1.56				1.72				1.23
390	391			45	35					40				50				
				1.42	1.40					1.79				1.96				
470	471				40					45								
					1.62					2.07								
560	561				45					50								L(mm)
					1.86					2.36								R.C.