


Полимерные самовосстанавливающиеся предохранители.

Технические параметры предохранителей серии JK 60

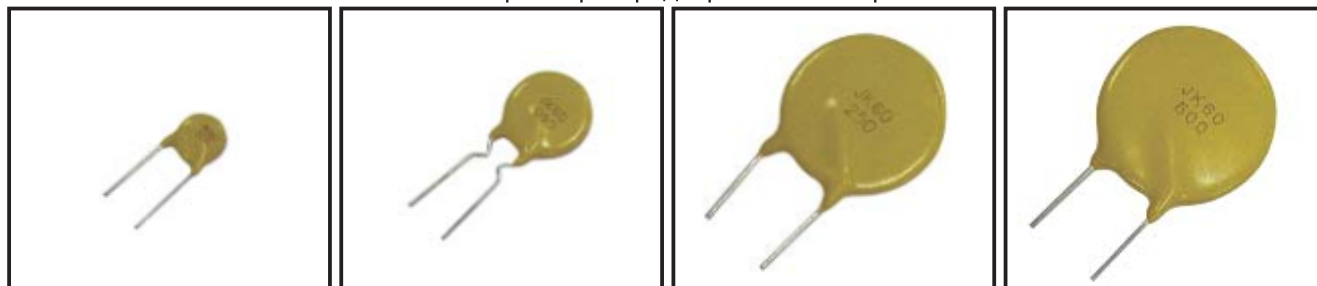

Тип	V	I _{max} (A)	I _h (A)	R _{max} (Ω)	R _{min} (Ω)	Pd (W)	Габаритные размеры			
							A	B	C	D
JK60-005	60	40	0.05	20.0	12.0	0.30	5.0	8.5	3.1	5.10
JK60-010	60	40	0.10	7.50	2.50	0.38	5.50	9.5	3.1	5.10
JK60-017	60	40	0.17	5.21	2.84	0.48	7.40	12.7	3.1	5.10
JK60-020	72	40	0.20	2.84	1.83	0.41	7.40	12.7	3.1	5.10
JK60-025	72	40	0.25	1.95	1.25	0.45	7.40	12.7	3.1	5.10
JK60-030	72	40	0.30	1.36	0.88	0.49	7.40	13.0	3.1	5.10
JK60-040	72	40	0.40	0.88	0.55	0.56	7.40	13.5	3.1	5.10
JK60-050	72	40	0.50	0.79	0.50	0.77	7.60	13.5	3.1	5.10
JK60-065	72	40	0.65	0.50	0.31	0.88	9.40	14.5	3.1	5.10
JK60-075	72	40	0.75	0.42	0.25	0.92	10.2	15.2	3.1	5.10
JK60-090	72	40	0.90	0.33	0.20	0.99	11.2	15.8	3.1	5.10
JK60-110-y	72	40	1.10	0.27	0.15	1.50	12.8	18.0	3.1	5.10
JK60-110-f	72	40	1.10	0.27	0.15	1.50	13.0	18.0	3.1	5.10
JK60-135	72	40	1.35	0.21	0.12	1.70	14.5	19.6	3.1	5.10
JK60-160	72	40	1.60	0.16	0.09	1.90	16.3	21.3	3.1	5.10
JK60-185	72	40	1.85	0.14	0.08	2.10	17.5	22.9	3.1	5.10
JK60-250	72	40	2.50	0.10	0.05	2.50	20.8	26.4	3.1	10.2
JK60-300	72	40	3.00	0.08	0.04	2.80	23.9	30.0	3.1	10.2
JK60-375	72	40	3.75	0.07	0.03	3.20	27.2	31.8	3.1	10.2
JK60-500	72	40	5.00	0.02	0.03	4.20	27.2	31.8	3.1	10.2