


Ⓜ KSD-9700、CK-1 系列 (KSD-9700、CK-1 SERIES)

温度保护器

THERMOSTAT



单位 Unit:mm

APPLICATION FOR:

Fan motor, Transformer, Fluorescence Lamp Ballast, Battery, Induction Cooker, Motor, etc.


KSD-9700

额定 动作温度 Rated Functioning Temp. T _f (°C)	恢复温度 Reset Temp. T _{on} (°C)	额定电压 Voltage AC(V)	额定电流 Current (A)	安全认证 SAFETY APPROVALS
				CQC
60 ± 5	40 ± 10	250	5	
70 ± 5	50 ± 10	250	5	●
80 ± 5	55 ± 10	250	5	●
85 ± 5	60 ± 10	250	5	●
90 ± 5	65 ± 10	250	5	●
95 ± 5	70 ± 10	250	5	●
100 ± 5	75 ± 10	250	5	●
105 ± 5	80 ± 10	250	5	●
110 ± 5	80 ± 10	250	5	●
115 ± 5	80 ± 10	250	5	●
120 ± 5	80 ± 10	250	5	●
125 ± 5	80 ± 10	250	5	●
130 ± 5	90 ± 15	250	5	●
135 ± 5	90 ± 15	250	5	●
140 ± 5	90 ± 15	250	5	●
145 ± 5	90 ± 15	250	5	●
150 ± 5	90 ± 15	250	5	●

● DENOTES FOR APPROVED (●表示已取得认证)

CK-1

额定 动作温度 Rated Functioning Temp. T _f (°C)	恢复温度 Reset Temp. T _{on} (°C)	额定电压 Voltage AC(V)	额定电流 Current (A)
60 ± 5	35 ± 15	250	5、10
65 ± 5	40 ± 15	250	5、10
70 ± 5	45 ± 15	250	5、10
75 ± 5	50 ± 15	250	5、10
80 ± 5	55 ± 15	250	5、10
85 ± 5	60 ± 15	250	5、10
90 ± 5	65 ± 15	250	5、10
95 ± 5	70 ± 15	250	5、10
100 ± 5	70 ± 15	250	5、10
105 ± 5	70 ± 15	250	5、10
110 ± 5	70 ± 15	250	5、10
115 ± 5	75 ± 20	250	5、10
120 ± 5	80 ± 20	250	5、10
125 ± 5	85 ± 20	250	5、10
130 ± 5	90 ± 20	250	5、10
135 ± 5	90 ± 25	250	5、10
140 ± 5	90 ± 25	250	5、10
145 ± 5	90 ± 25	250	5、10
150 ± 5	95 ± 25	250	5、10

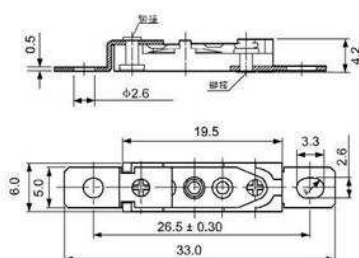

单位 Unit:mm

APPLICATION FOR:

Hand-held Hair Dryer, Dehumidifying Machine, Electric Fan, etc.

好利®温度保护器

HOLLY® THERMOSTAT