


Quick Disconnect - Female (Full Insulated)

Brass
Tin Plated
P.V.C. Insulation

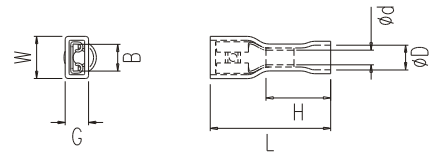

T=Mating Tab Thickness

Part No	L	B	W	T	H	G	ØD	Ød	Wire Size AWG(mm ²)	Current Rating	Insulation Color	Qty/Box	Weight/Box
KTL-017-01	20.0	3.2	5.8	0.5	10.5	4.3	4.0	1.7	22-16 (0.25-1.65)	10 A	Red	2000	1.6 kg
KTL-017-02	20.0	3.2	5.8	0.8	10.5	4.5						3000	1.6 kg
KTL-017-03	20.0	5.0	7.5	0.5	10.0	4.7						1500	1.3 kg
KTL-017-04	20.0	5.0	7.7	0.8	10.0	5.2						2500	2.0 kg
KTL-017-05	22.0	6.6	9.7	0.8	10.0	6.0						1700	2.0 kg
KTL-017-06	20.0	3.2	5.6	0.5	11.0	5.5	4.3	2.3	16-14 (1.04-2.63)	15 A	Blue	1500	1.2 kg
KTL-017-07	20.0	3.2	5.6	0.8	11.0	5.5						1500	1.2 kg
KTL-017-08	20.0	5.0	7.5	0.5	10.5	5.5						1000	1.0 kg
KTL-017-09	20.0	5.0	7.8	0.8	10.5	5.5						2000	1.7 kg
KTL-017-10	22.0	6.6	9.3	0.8	10.5	6.0						1700	2.0 kg
KTL-017-11	20.0	3.0	5.8	0.5	11.0	6.4	5.4	3.5	12-10 (2.63-6.64)	24 A	Yellow	1500	1.4 kg
KTL-017-12	20.0	3.0	5.8	0.8	11.0	6.4						1500	1.4 kg
KTL-017-13	21.5	5.0	7.8	0.5	11.0	6.4						1000	1.2 kg
KTL-017-14	21.5	5.0	7.8	0.8	11.0	6.4						1000	1.2 kg
KTL-017-15	23.0	6.6	9.7	0.8	11.0	6.4						1200	1.7 kg

Unit = mm