

AC/DC 100W Enclosed Switching Power Supply
LM100-20Bxx, LM100-20Bxx-Q Series

MORNSUN®



FEATURES

- Universal 85 - 264VAC or 120 - 370VDC input voltage
- Accepts AC or DC input (dual-use of same terminal)
- Operating ambient temperature range: -30℃ to +70℃
- Low standby power consumption, high efficiency
- High I/O isolation test voltage up to 4000VAC
- Low ripple & noise
- 150% peak power lasts 5S
- Output short circuit, over-current, over-voltage protection
- OVC III (designed to meet EN61558)
- Operating up to 5000m altitude
- 3 years warranty

CE Report
EN62368-1
EN60335-1
EN61558-1
EN61558-2-16

CCC
GB4943.1

UK
BS EN 62368-1

RoHS

IP30
www.bda.gov.cn

LM100-20Bxx series is one of Mornsun's enclosed AC-DC switching power supply. It features universal AC input and at the same time accepts DC input voltage, cost-effective, low no load power consumption, high efficiency and high reliability. These converters offer excellent EMC performance and meet IEC/EN61000-4, CISPR32/EN55032, IEC/EN/UL62368, EN60335, GB4943, EN61558 standards and they are widely used in areas of industrial, LED, street light control, security, telecommunications, smart home etc.

Selection Guide

Certification	Part No.*	Output Power (W)	Nominal Output Voltage and Current (Vo/Io)	Output Voltage Adjustable Range (V)	Efficiency at 230VAC (%) Typ.	Capacitive Load (uF) Max.
EN/CCC	LM100-20B05	90	5V/18A	4.5-5.5	85	10000
	LM100-20B12	102	12V/8.5A	10.2-13.8	86.5	6800
	LM100-20B15	105	15V/7.0A	13.5-18	86.5	3300
	LM100-20B24	108	24V/4.5A	21.6-28.8	89.5	2200
	LM100-20B36	100.8	36V/2.8A	32.4-39.6	89.5	1000
	LM100-20B48	110.4	48V/2.3A	43.2-52.8	90.5	470

Note: 1. *Use suffix "Q" for conformal coating and suffix "QGX" for double side conformal coating.
2. If the terminal cover is required, please order "PJA-033" for self-installation.
3. The product picture is for reference only. For details, please refer to the actual product.

Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Voltage Range	AC input		85	--	264	VAC
	DC input		120	--	370	VDC
Input Voltage Frequency			47	--	63	Hz
Input Current	115VAC		--	--	3	A
	230VAC		--	--	1.5	
Inrush Current	115VAC	Cold start	--	35	--	
	230VAC		--	65	--	
Leakage Current	240VAC		<0.75mA			
Hot Plug			Unavailable			

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy	Full load range	5V	--	±2	--	%
		12V/15V/24V/36V/48V	--	±1	--	
Line Regulation	Rated load		--	±0.5	--	
Load Regulation	0% - 100% load	5V	--	±1	--	

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.







AC/DC 100W Enclosed Switching Power Supply

LM100-20Bxx, LM100-20Bxx-Q Series

MORNSUN®

		12V/15V/24V/36V/48V	--	±0.5	--	
Output Ripple & Noise*	20MHz bandwidth (peak-to-peak value)	5V	--	100	--	mV
		12V/15V	--	120	--	
		24V	--	150	--	
		36V/48V	--	200	--	
Temperature Coefficient			--	±0.03	--	%/℃
Minimum Load			0	--	--	%
Stand-by Power Consumption	230VAC		--	--	0.5	W
Hold-up Time	115VAC		5	10	--	ms
	230VAC		45	55	--	
Short Circuit Protection	5V, constant current for more than 5 seconds, turn off the output voltage, input restart and restore		≥150% Io, constant current for more than 5 seconds, turn off the output voltage, input restart and restore			
	12V/15V/24V/36V/48V, recovery time < 5s after the short circuit disappear.		Hiccup, continuous, self-recover			
Over-current Protection			≥110% Io, for more than 5 seconds, turn off the output, power restart after recovery			
Over-voltage Protection	5V		≤7.5VDC		Hiccup, self-recover	
	12V		≤19.2VDC			
	15V		≤24VDC			
	24V		≤38.4VDC			
	36V		≤57.6VDC			
	48V		≤60VDC			
Note: *The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor, please refer to Enclosed Switching Power Supply Application Notes for specific information.						

General Specifications

Item		Operating Conditions			Min.	Typ.	Max.	Unit
Isolation	Input - 	Electric strength test for 1min., leakage current <3mA		24V/36V	2000	--	--	VAC
	Input - output	Electric strength test for 1min., leakage current <5mA			4000	--	--	
	Output - 	Electric strength test for 1min., leakage current <5mA			1250	--	--	
	Input - 	Electric strength test for 1min., leakage current <10mA		5V/12V/15V/48V	2000	--	--	
	Input - output				4000	--	--	
	Output - 				1250	--	--	
Insulation Resistance	Input - 	At 500VDC			100	--	--	M Ω
	Input - output				100	--	--	
	Output - 				100	--	--	
Operating Temperature					-30	--	+70	°C
Storage Temperature					-40	--	+85	
Storage Humidity		Non-condensing			10	--	95	%RH
Operating Humidity					20	--	90	
Switching Frequency					--	65	--	kHz
Power Derating		Operating temperature derating	5V output	+45°C to +70°C	1.6	--	--	% / °C
			Other output	+50°C to +70°C	2.0	--	--	
		Input voltage derating		85VAC-115VAC			0.67	--

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

2025.05.16-B/3

Page 2 of 4

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

AC/DC 100W Enclosed Switching Power Supply
LM100-20Bxx, LM100-20Bxx-Q Series



MORNSUN®

Safety Standard		EN/BS EN62368-1, GB4943.1, IS13252 (Part1) safety approved & EN60335-1, EN61558-1, EN61558-2-16; Design refer to UL/IEC62368-1
Safety Class		CLASS I
MTBF	MIL-HDBK-217F@25℃	>30,0000 h
Warranty	Ambient temperature: <70℃	3 years



Mechanical Specifications		
Case Material	Metal (AL1100, SGCC)	
Dimension	129.00 x 97.00 x 30.00mm	
Weight	5V	325g (Typ.)
	12V/15V/24V/36V/48V	305g (Typ.)
Cooling Method	Free air convection	

Electromagnetic Compatibility (EMC)				
Emissions	CE	CISPR32/EN55032	CLASS B	
	RE	CISPR32/EN55032	CLASS B	
	Harmonic current	IEC/EN61000-3-2	CLASS A	
Immunity	ESD	IEC/EN61000-4-2	Contact ±6KV/Air ±8KV	perf. Criteria A
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4	±2KV	perf. Criteria A
	Surge	IEC/EN61000-4-5	line to line ±2KV/line to PE ±4KV	perf. Criteria A
	CS	IEC/EN61000-4-6	10 Vr.m.s	perf. Criteria A
	Voltage dip, short interruption and voltage variation	IEC/EN61000-4-11	100% dip 1 periods, 30% dip 25 periods, 100% interruptions 250 periods	Perf. Criteria B



Product Characteristic Curve

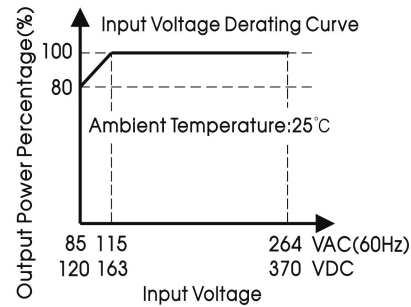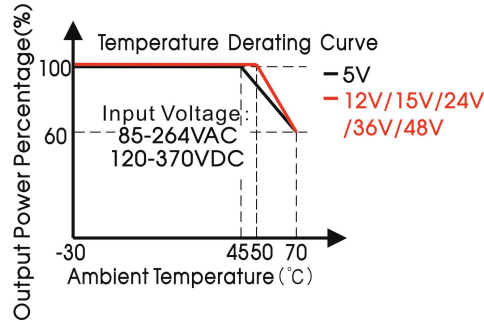

- Note: 1. With an AC input voltage between 85-115 VAC and a DC input between 120-163 VDC the output power must be derated as per the temperature derating curves;
2. This product is suitable for applications using natural air cooling; for applications in closed environment please consult Mornsun FAE.
3. Product start at 50% output power under low temperature and low input voltage (-30℃, below 100VAC).

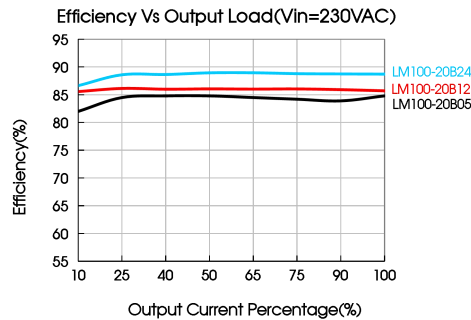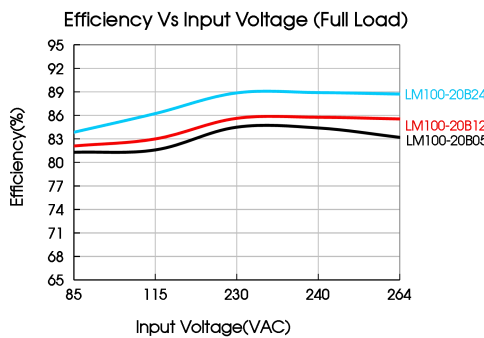


Dimensions and Recommended Layout

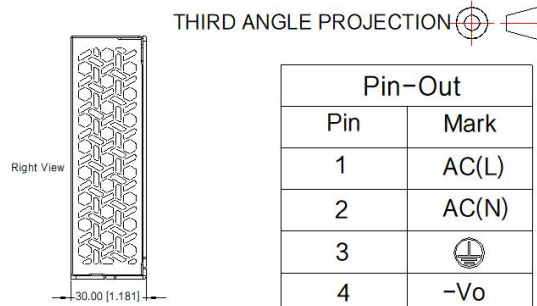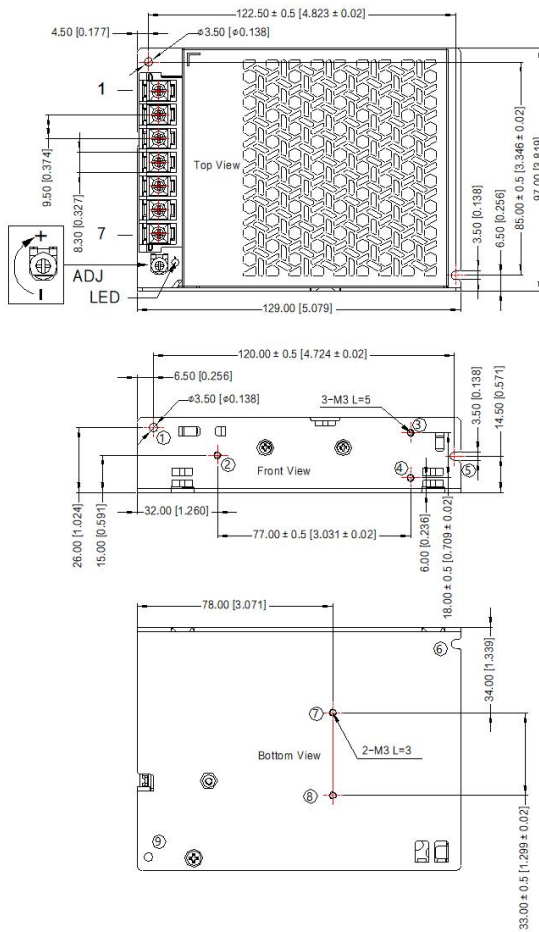

Pin-Out	
Pin	Mark
1	AC(L)
2	AC(N)
3	
4	-Vo
5	-Vo
6	+Vo
7	+Vo

① - ⑨ any position must be connected to the earth (⊕)

Position	Screw Spec.	Length of locking screw L (max)	Recommended Torque
② - ④	M3	5mm	0.4N·m ± 10%
⑦ - ⑧	M3	3mm	0.4N·m ± 10%

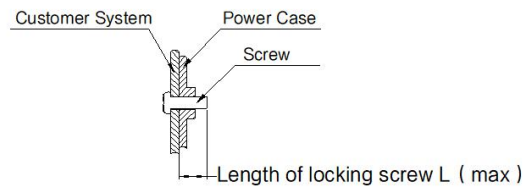

Note:
 Unit: mm[inch]
 ADJ: Output adjustable resistor
 Wire range: 22-12AWG
 Terminal recommended torque: M3.5, 0.8N·m ± 10%
 General tolerances: ± 1.00 [± 0.039]

Note:

- For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58220723;
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25℃, humidity <75%RH with nominal input voltage and rated output load;
- The room temperature derating of 5℃/1000m is needed for operating altitude greater than 2000m;
- All index testing methods in this datasheet are based on our company corporate standards;
- In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
- We can provide product customization service, please contact our technicians directly for specific information;
- Products are related to laws and regulations: see "Features" and "EMC";
- The out case needs to be connected to PE (⊕) of system when the terminal equipment in operating;
- The output voltage can be adjusted by the ADJ, clockwise to increase;
- Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units;
- The power supply is considered a component which will be installed into a terminal equipment. All EMC tests should be confirmed with the final equipment. Please consult our FAE for EMC test operation instructions.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 8 Nanyun 4th Road, Huangpu District, Guangzhou, China

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: info@mornsun.cn

www.mornsun-power.com