


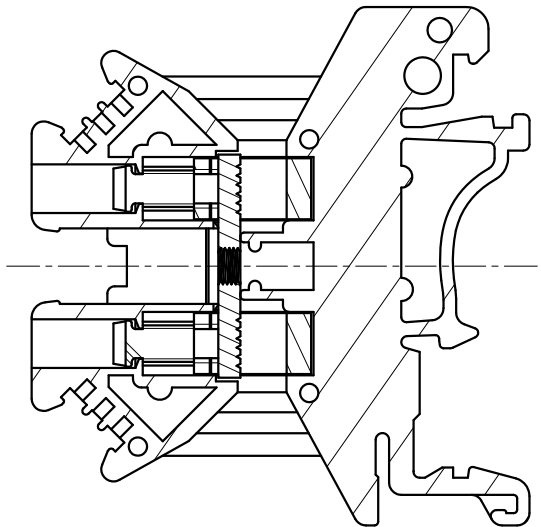

PC2.5B - 01P - 1Y - 00A (H)
(Series No.) (Poles) (Single Pitch) (Color) :1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

NOTES1:
UL Standard
1.Rated voltage/current : 600V / 20A
2.Withstanding voltage : AC2200V/1Min.
3.Torque value : M3 , 4.43lb.in
4.Wire range : 24~12AWG

IEC Standard


1. Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	8KV
Rate voltage(V)	800V
Rate current(A)	24A

2.Torque value : M3 , 0.5N·m
3.Wire range : 0.2~2.5mm²

NOTES2:
1.Dimension shall be interpreted per ASME Y14.5-2009
2.Pitch : 6.2mm, Poles : N=01P
3.Stripping length : 6~7mm
4.Operating temperature: -40°C~+105°C
5.Undimensioned tolerances:

Pitch	Range	In	Nominal	Dimension	Range	mm	mm
Over	Over	Over	Over	Over	Over	0.1/10	0.1/10
6	10	10	30	60	100	150	150
TO	TO	TO	TO	TO	TO	TO	TO
6	10	24	30	60	100	150	150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30

6.RoHS Compliance

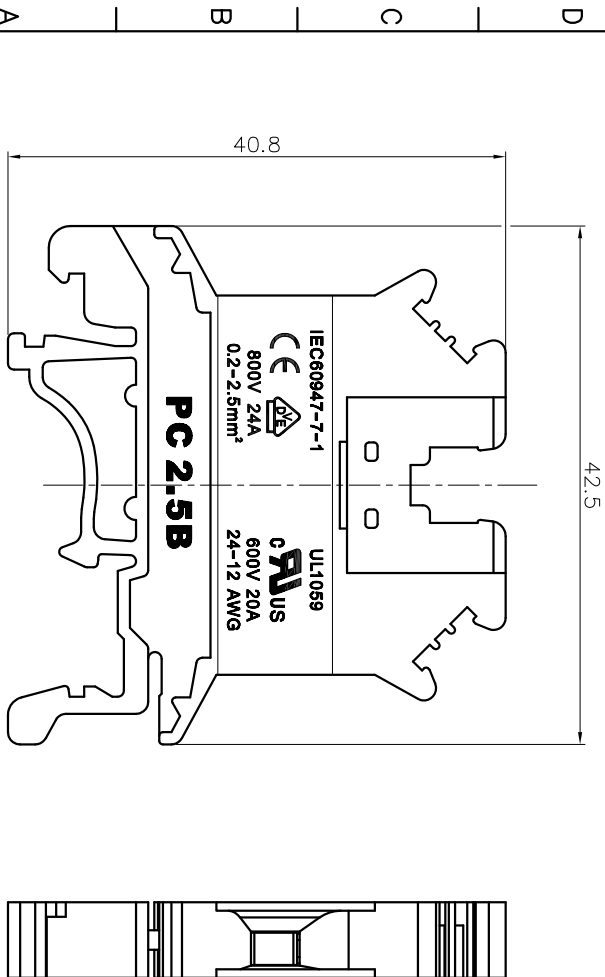

DETACHED LISTS			
PART NO.:	/	NAME:	NINGBO DEGSON ELECTRICAL CO., LTD
APPD:	/	NAME:	PC2.5B-01P-1Y-00A(H)
CHKD:	/	TITLE:	CUSTOMER DRAWING
DRFT:	/	DRAWING NO.:	/
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	SCALE
		1:1	1:1