





Switch

Tact Switch Series

KLS7-TS6603 6x6 Tact Switch Series

ELECTRICAL

- 1.Rating: 50mA 12VDC
- 2.Contact Resistance : 50mΩ max(initial)
- 3.Insulation Resistance: 100MΩ(minDC 250V)
- 4.Dielectric Strength : AC250V(50/60Hz for 1minute)
- 5.Electrically Life: 100000cycles
- 6.Environment temperature:-20°C~+70°C
- 7.Operating Force: 180/250(±30gf)
- 8.Seal temperature:260°C~ 280°C

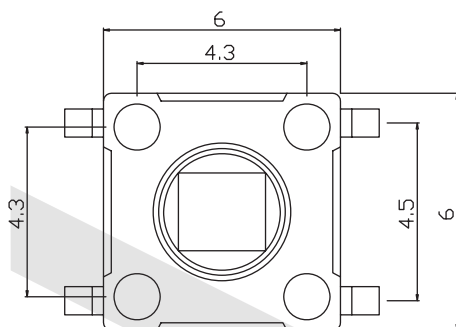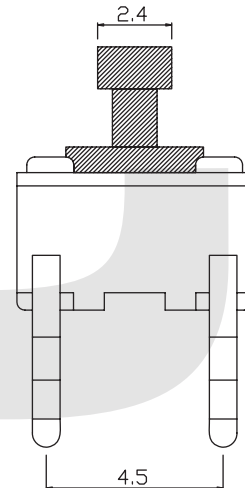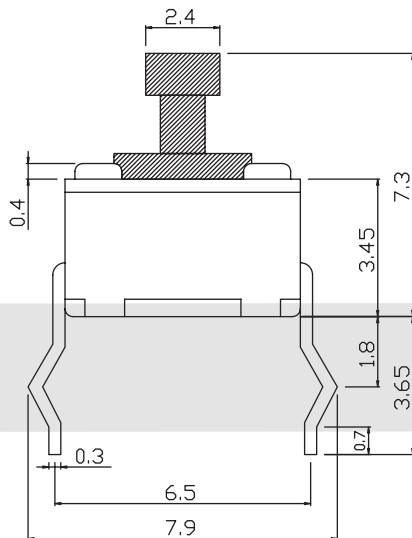

PCB LAYOUT

ORDER INFORMATION

KLS7-TS6603 - 180 - B

Series No. _____

Handle Color: B-Black Y-Yellow
Operating Force :180~250gf