

30W isolated DC-DC converter in 1x1 inch
Ultra-wide input and regulated single output



CE Patent Protection RoHS



FEATURES

- Wide 4:1 input voltage range
- High efficiency up to 88%
- I/O isolation test voltage 1.5K VDC
- Input under-voltage protection, output short circuit, over-current, over-voltage protection
- Operating ambient temperature range: -40°C to +85°C
- Industry standard pin-out
- EN62368 approved

URB_YMD-30WR3 series of isolated 30W DC-DC converter products with an ultra-wide 4:1 input voltage range. They feature efficiencies up to 88%, input to output isolation is tested with 1500VDC and the converter safely operate ambient temperature of -40°C to +85°C, input under-voltage protection, output over-voltage, over-current, short-circuit, protection. They are ideally and widely used in applications such as industrial control, electric power, instruments and communications.

Selection Guide

Certification	Part No.	Input Voltage (VDC)		Output		Full Load Efficiency ^② (%) Min./Typ.	Capacitive Load (μF)Max.
		Nominal (Range)	Max. ^①	Voltage (VDC)	Current(mA) Max./Min.		
CE	URB4805YMD-30WR3	48 (18-75)	80	5	6000/0	86/88	7200
	URB4812YMD-30WR3			12	2500/0	86/88	2000
	URB4815YMD-30WR3			15	2000/0	86/88	1500
	URB4824YMD-30WR3			24	1250/0	86/88	470

Notes:

- ① Exceeding the maximum input voltage may cause permanent damage;
② Efficiency is measured in nominal input voltage and rated output load.

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Current (full load / no-load)	Nominal input voltage	--	710/8	735/15	mA
Reflected Ripple Current		--	40	--	
Surge Voltage (1sec. max.)		-0.7	--	100	VDC
Start-up Voltage		--	--	18	
Input under-voltage protection		12	15.5	--	
Start-up Time	Nominal input voltage & constant resistance load	--	10	--	ms
Input Filter		Capacitance filter			
Hot Plug		Unavailable			
Ctrl*	Module on	Ctrl pin open or pulled high (TTL 3.5-12VDC)			
	Module off	Ctrl pin pulled low to GND (0-1.2VDC)			
	Input current when off	--	2	7	mA

Note: *The Ctrl pin voltage is referenced to input GND.

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Voltage Accuracy	5%-100% load	--	±1	±3	%
Linear Regulation	Input voltage variation from low to high at full load	--	±0.2	±0.5	

Load Regulation	5%-100% load	--	±0.5	±1	%
Transient Recovery Time	25% load step change, nominal input voltage	--	250	500	μs
Transient Response Deviation	25% load step change, input voltage range	5V output	--	±3	±8
		Others	--	±3	±5
Temperature Coefficient	Full load	--	--	±0.03	%/°C
Ripple & Noise*	20MHz bandwidth, nominal input voltage, 5%-100% load	5V/12V/15V output	--	60	120
		24V output	--	60	150
Trim	Input voltage range	90	--	110	%Vo
Over-voltage Protection		110	--	160	
Over-current Protection		110	170	260	%Io
Short circuit Protection		Continuous, self-recovery			

Note: *Ripple & Noise at < 5% load is 300mV max. The "parallel cable" method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information.

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation	Input-output Electric Strength Test for 1 minute with a leakage current of 1mA max.	1500	--	--	VDC
Insulation Resistance	Input-output resistance at 500VDC	1000	--	--	MΩ
Isolation Capacitance	Input-output capacitance at 100KHz/0.1V	--	2000	--	pF
Operating Temperature	See Fig. 1	-40	--	+85	°C
Storage Temperature		-55	--	+125	
Storage Humidity	Non-condensing	5	--	95	%RH
Pin Soldering Resistance Temperature	Soldering spot is 1.5mm away from case for 10 seconds	--	--	+300	°C
Vibration		10-150Hz, 5G, 0.75mm. along X, Y and Z			
Switching Frequency *	PWM mode	--	270	--	KHz
MTBF	MIL-HDBK-217F@25°C	1000	--	--	K hours

Note: *Switching frequency is measured at full load. The module reduces the switching frequency for light load (below 50%) efficiency improvement.

Mechanical Specifications

Case Material	Aluminum alloy				
Dimensions	Horizontal package	25.40 × 25.40 × 11.70 mm			
Weight		18.4g			
Cooling method	Free air convection				

Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032	CLASS B (see Fig.3-② for recommended circuit)/CLASS A (see Fig.4 for recommended circuit)		
	RE	CISPR32/EN55032	CLASS B (see Fig.3-② for recommended circuit)/CLASS A (see Fig.4 for recommended circuit)		
Immunity	ESD	IEC/EN61000-4-2	Contact ±6KV		perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m		perf. Criteria B
	EFT	IEC/EN61000-4-4	±2KV (see Fig.3-① for recommended circuit)		perf. Criteria B
	Surge	IEC/EN61000-4-5	line to line ±2KV (see Fig.3-① for recommended circuit)		perf. Criteria B
	CS	IEC/EN61000-4-6	3 Vr.m.s		perf. Criteria B

Typical Characteristic Curves

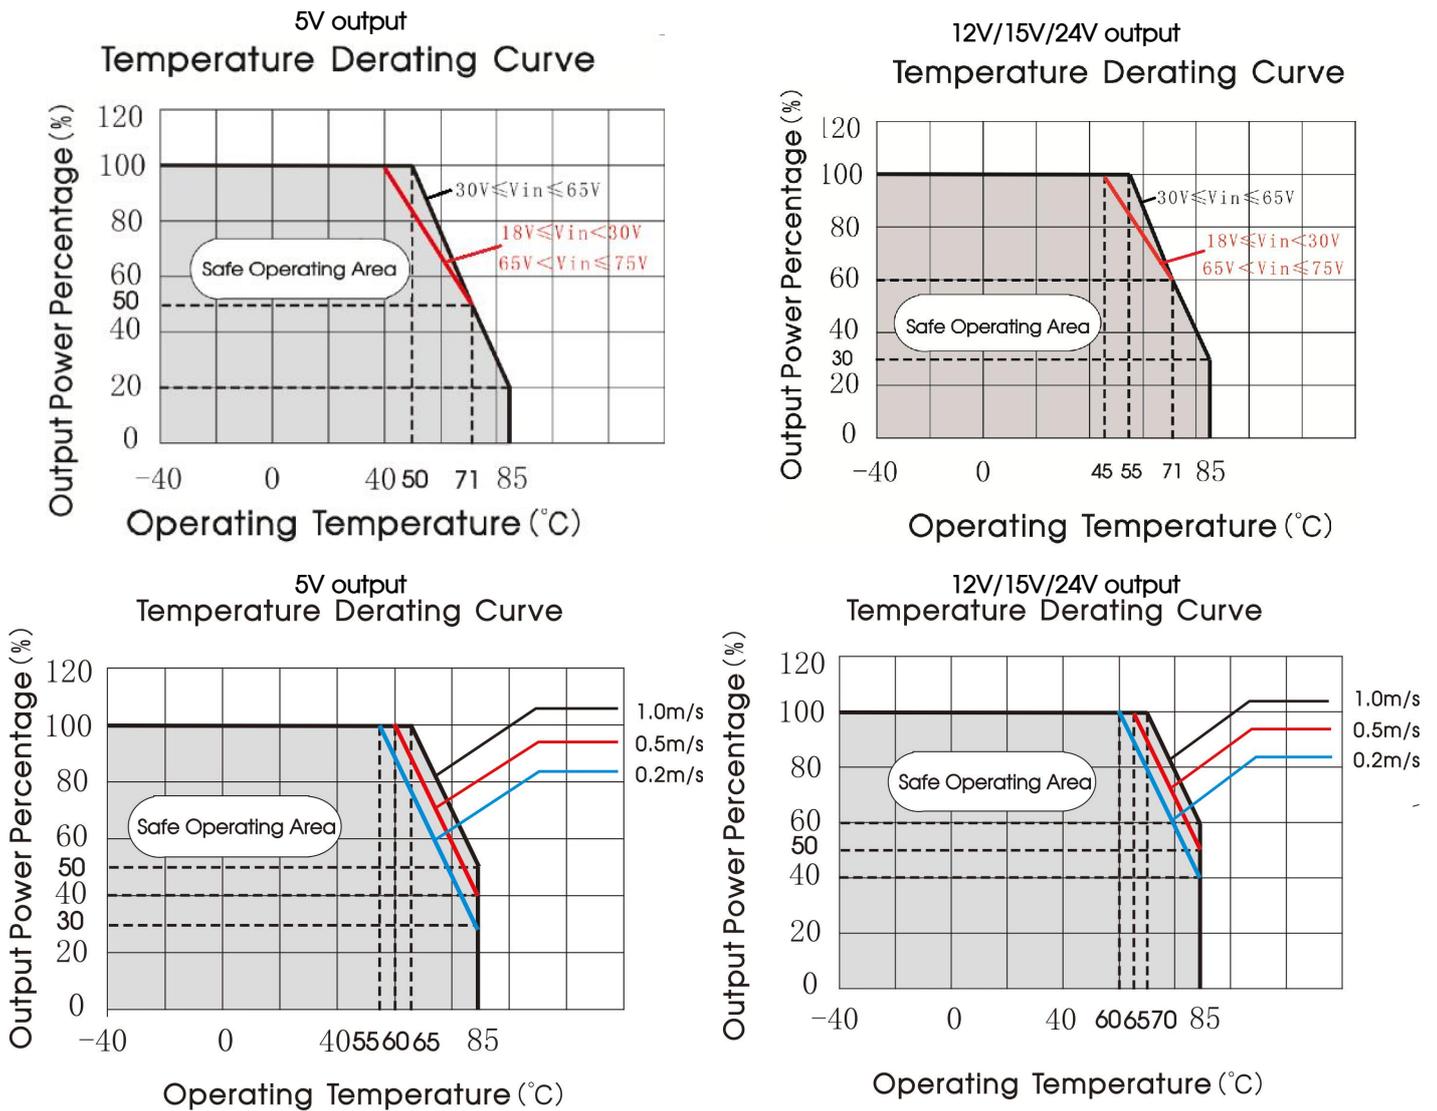


Fig. 1

Design Reference

1. Typical application

All DC-DC converters of this series are tested before delivery using the recommended circuit shown in Fig. 2.

Input and/or output ripple can be further reduced by appropriately increasing the input & output capacitor values C_{in} and C_{out} and/or by selecting capacitors with a low ESR (equivalent series resistance). Also make sure that the capacitance is not exceeding the specified max. capacitive load value of the product.



Fig. 2

Vout (VDC)	Cin (μF)	Cout (μF)
5, 12, 15	100	100
24		47

2. EMC compliance circuit

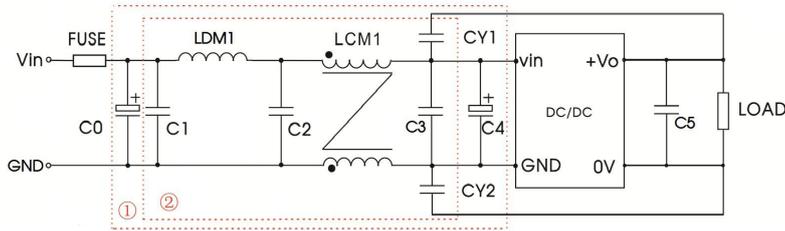


Fig. 3

Notes: We use Part ① in Fig. 3 for Immunity tests and Part ② for Emissions test. Selecting based on needs.

Parameter description:

Model	Vin:48V
FUSE	Choose according to actual input current
C0, C4	470µF/100V
C1	10µF/100V
LDM1	22µH/3A
C2	22µF/100V
LCM1	10mH, recommended to use MORNSUN P/N: FL2D-30-103(C)
C3	22µF/100V
C5	Refer to the Cout in Fig.2
CY1, CY2	1nF/2KV


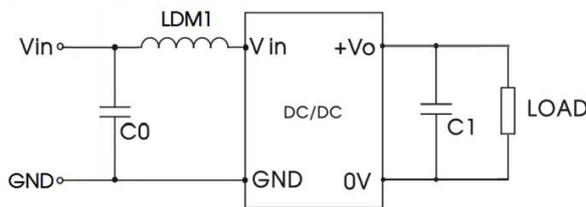


Fig. 4

Parameter description:

Model	Vin:48V
C0	4.7µF/100V
LDM1	22µH/3A
C1	Refer to the Cout in Fig.2

3. Trim Function for Output Voltage Adjustment (open if unused)

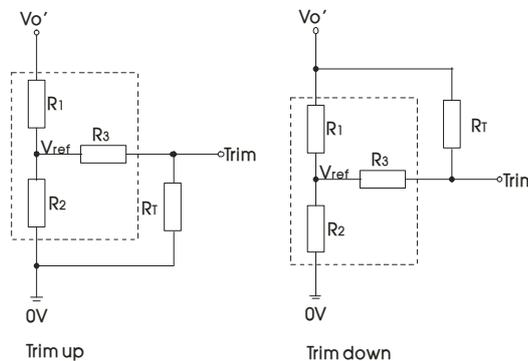

TRIM resistor connection (dashed line shows internal resistor network)

Calculating Trim resistor values:

$$\begin{aligned} \text{up: } R_T &= \frac{\alpha R_2}{R_2 - \alpha} \cdot R_3 & \alpha &= \frac{V_{ref}}{V_{o'} - V_{ref}} \cdot R_1 \\ \text{down: } R_T &= \frac{\alpha R_1}{R_1 - \alpha} \cdot R_3 & \alpha &= \frac{V_{o'} - V_{ref}}{V_{ref}} \cdot R_2 \end{aligned}$$

R_T is Trim resistance
 α is a self-defined parameter, with no real meaning.


Vout(V)	R1(K Ω)	R2(K Ω)	R3(K Ω)	Vref(V)
5	8.832	2.87	10	1.24
12	11.00	2.87	8.2	2.5
15	14.40	2.87	10	2.5
24	24.87	2.87	7.5	2.5

4. The products do not support parallel connection of their output

5. For additional information please refer to DC-DC converter application notes on

www.mornsun-power.com

Dimensions and Recommended Layout

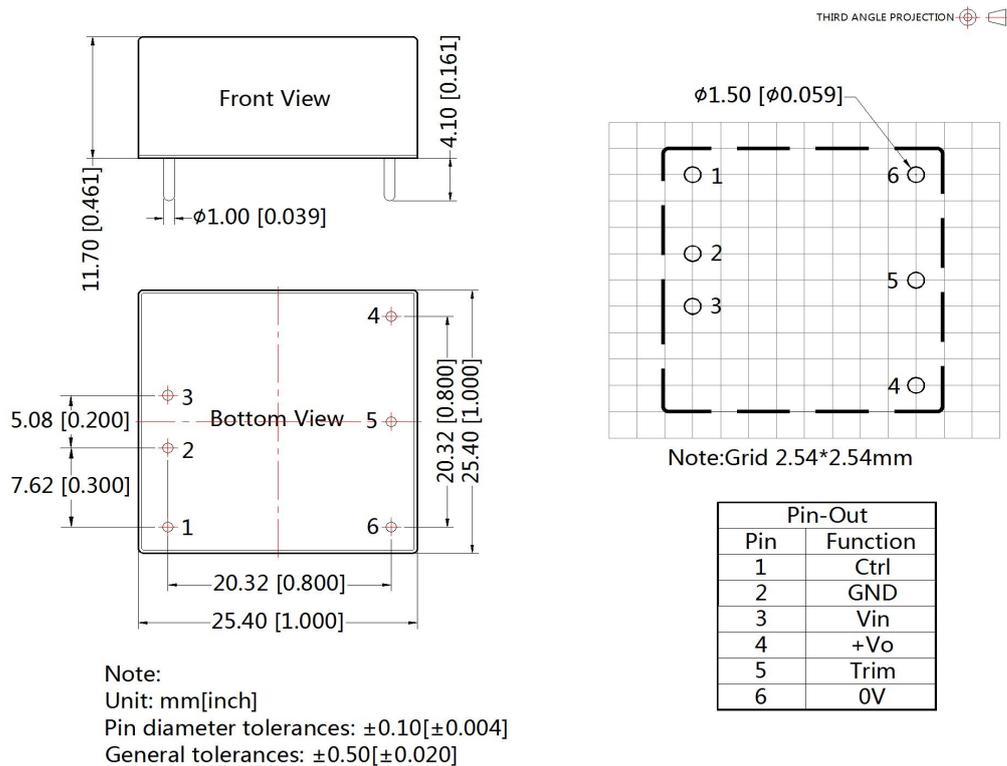

Note:

1. For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58210003;
2. The maximum capacitive load offered were tested at input voltage range and full load;
3. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^\circ\text{C}$, humidity<75%RH with nominal input voltage and rated output load;
4. All index testing methods in this datasheet are based on company corporate standards;
5. We can provide product customization service, please contact our technicians directly for specific information;
6. Products are related to laws and regulations: see "Features" and "EMC";
7. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: info@mornsun.cn www.mornsun-power.com