


- 尺寸      Size: 40 × 40 × 20mm
- 马达      Motor : Brushless DC, auto restart  
Impedance & polarity protected
- 风叶外壳   Impeller& Frame:Glassfiber reinforced thermoplastic  
PBT UL94V-0
- 绝缘      Insulation Resistance:Min.10M at DC 500V
- 耐压      Dielectric Strength: 500VAC/1 sec. Max. leakage  
500 micro amp
- 温度范围   Permissible Temp. Range: Ball bearing -20℃~+75℃  
Sleeve Bearing -10℃~+50℃
- 安规认证   Safety:UL>CUL>CE
- 寿命      Life Expectancy at 40℃: Ball Bearing 50000 hr.  
Sleeve Bearing 30000 hr.

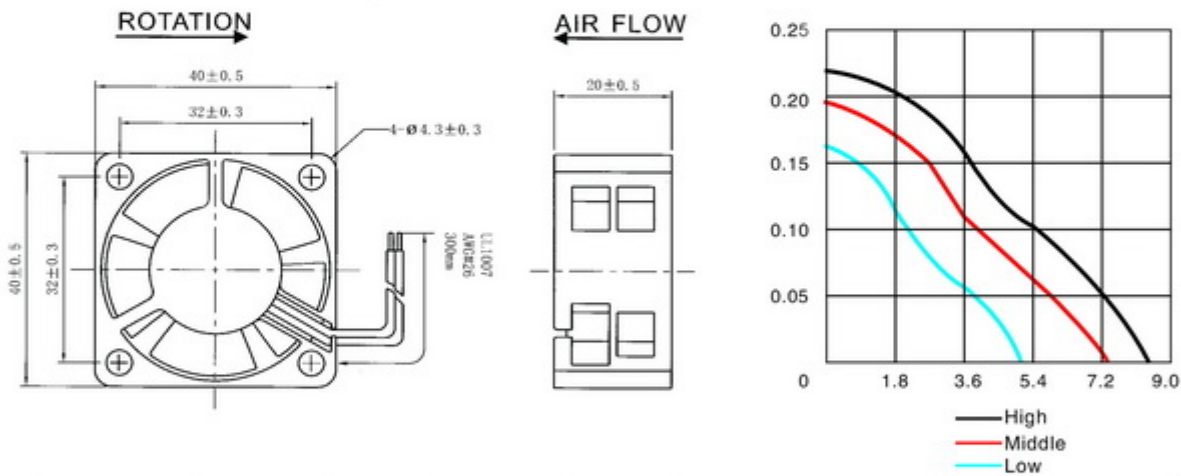

| Model<br>( 型号 ) | Rated Voltage<br>(VDC)<br>(额定电压) | Startup Voltage<br>(VDC)<br>(启动电压) | Current Amp<br>(A)<br>(电流) | Speed<br>(rpm)<br>(转速) | Air Flow<br>(CFM)<br>(风量) | Static Pressure<br>(Inch-H2o)<br>(风压) | Noise Level<br>(dB-A)<br>(噪音) | Weight<br>(g)<br>(重量) |
|-----------------|----------------------------------|------------------------------------|----------------------------|------------------------|---------------------------|---------------------------------------|-------------------------------|-----------------------|
| YM0504PKS(B)1   | 5.00                             | 3.00                               | 0.20                       | 8000                   | 7.25                      | 0.19                                  | 32                            | 24.00                 |
| Ym0504PKS(B)2   | 5.00                             | 3.00                               | 0.12                       | 6000                   | 6.21                      | 0.16                                  | 27                            | 24.00                 |
| Ym1204PKS(B)1   | 12.00                            | 5.00                               | 0.14                       | 9000                   | 8.28                      | 0.22                                  | 35                            | 24.00                 |
| Ym1204PKS(B)2   | 12.00                            | 5.00                               | 0.11                       | 8000                   | 7.25                      | 0.19                                  | 27                            | 24.00                 |
| Ym1204PKS(B)3   | 12.00                            | 5.00                               | 0.07                       | 6000                   | 6.21                      | 0.16                                  | 25                            | 24.00                 |
| Ym2404PKS(B)1   | 24.00                            | 10.00                              | 0.07                       | 9000                   | 8.28                      | 0.22                                  | 35                            | 24.00                 |
| Ym2404PKS(B)2   | 24.00                            | 10.00                              | 0.06                       | 8000                   | 7.25                      | 0.19                                  | 32                            | 24.00                 |
| Ym2404PKS(B)3   | 24.00                            | 10.00                              | 0.04                       | 6000                   | 6.21                      | 0.16                                  | 27                            | 24.00                 |